

New

Hot products from Fluke



Fluke-62, T+Pro and 1AC Kit with case

Entry level electrical kit

The compact Fluke 62 IR thermometer teamed with the full featured T+PRO voltage tester and the easy-to-use 1AC-II non-contact voltage detector, has everything you need to solve problems quickly. Use the IR thermometer to test for overheating in electrical devices, then use the electrical test tools to find more about the problem.

Fluke 62 Mini Infrared Thermometer

- Best accuracy in it's class: $\pm 1.5\%$ of reading
- Wide temperature range from $-30\text{ }^{\circ}\text{C}$ to $500\text{ }^{\circ}\text{C}$ ($-20\text{ }^{\circ}\text{F}$ to $932\text{ }^{\circ}\text{F}$)
- Single point offset laser sighting

Fluke T+PRO Voltage and Continuity Tester

- 3 forms of ac/dc voltage detection: light, sound, and vibration
- Detect ghost voltage for more reliable measurements
- Continuity beeper

Fluke 1AC-II VoltAlert™ Non-Contact Voltage Detector

- Voltbeat technology continually tests its battery and circuitry, so you know it's working
- Upon detection of voltage, tip glows and beeper sounds
- Voltage detection of 90 to 1000 V ac

Fluke C115 Soft Case

- Lightweight soft case to provide optimal protection and accessory storage



RLD2 Refrigerant Leak Detector/Flashlight

Leak detection made easy

The compact, easy-to-use, RLD2 UV flashlight uncovers refrigerant leaks instantly. Use the UV light to find the leakage area, then, use the laser pointer to pinpoint the exact leak location. With 100,000 hours of LED flashlight life, and four operating modes, this versatile leak detector is a must have for HVAC Technicians.

- Six UV LEDs detect leak detection dyes
- Laser pointer clearly locates center of the UV field for accuracy
- Three LED flashlight with 100,000 hour LED life
- Operating temperature 0 °C to 50 °C
- Simple lock feature holds on the flashlight beam



80PK-10 Pipe Clamp Thermocouple Probe

Type K, extra large thermocouple clamps securely to pipes for fast temperature and superheat measurement.

- Durable ribbon sensor
- 1 m (39 in) lead
- For pipe diameters: 32 mm to 64 mm (1.25 in to 2.5 in)
- Measurement range: -29 °C to 149 °C (-20 °F to 300 °F)
- Measurements are repeatable to 0.56 °C (1 °F)
- Also available: 80PK-18 Pipe Clamp Thermocouple Probe Kit (comes complete with 80PK-8 and 80PK-10 pipe clamps, covering clamp sizes 6.4 mm to 64 mm (0.25 in to 2.5 in), in a soft carrying case)




Available for purchase: April 30, 2009

FTP Fused Test Probes

In response to new ESA guidelines, Fluke introduces test probes with built-in fuses for additional measurement protection. And, if the probe fuse does blow, these fused test probes will still allow the meter to indicate live voltage preventing misreading no power indication. The new modular fused test probes can mount onto any Fluke modular lead format. Rated to CAT III 1000 V, these probes also have sheathed tips for additional safety.

- Built-in fuses for additional measurement protection
- Probes allow indication of live voltage even with blown fuse
- 2 mm threaded probe tips include removable 4 mm lantern-style spring contacts and removable GS38 insulated IC caps for probing closely spaced leads
- Operating temperature – 20 °C to 50 °C (-5 °F to 120 °F)
- CAT III 1000 V, CAT IV 600 V, 10 A rating
- Also available: Fused Test Probe and Lead Set (comes with Fused Test Probes and TL224 test leads)

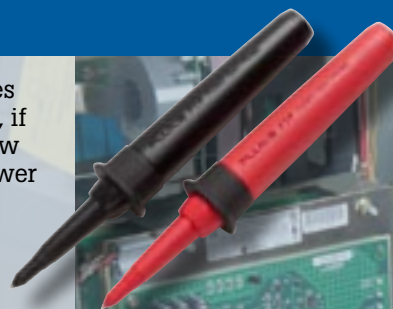

Available for purchase April 30, 2009

Who can use these products

Channel	Electrical	HVAC	Industrial Maintenance
Job Function	Electrician	HVAC Technician	Maintenance Technician/Electro-Mechanical Technician
Products	62	62	62
	T+PRO	RLD2 leak detector/flashlight	T+PRO
	RLD2 (flash light feature)	8OPK-10	RLD2 (flash light feature)
	1AC	8OPK-18	1AC
	FTP fused test probe set	FTP fused test probe set	FTP fused test probe set
	FTPL fused test probe lead set	FTPL fused test probe lead set	FTPL fused test probe lead set
			8OPK-10
		8OPK-18	

Ordering Information

Model	Description	Item #	UPC code	Single product pkg dimensions	Weight	Country of origin
FLUKE-62/T+PRO/1AC	Fluke-62/T+Pro/1AC, Kit with C115 Softcase	3338085	0 95969 46967 8	25.4 cm (10.0 in) H x 6.985 cm (2.75 in) W x 25.4 cm (10.0 in) D	.998 kg (2.2 lbs)	China
RLD2	Leak detector flashlight	3387163	0 95969 48492 3	25.908 cm (10.2 in) H x 18.745 cm (7.38 in) W x 3.860 cm (1.52 in) D	.1768 kg (.390 lbs)	China
8OPK-10	Type-k, pipe clamp thermocouple probe, 1.25-2.5	3439199	0 95969 49326 0	30.150 cm (11.87 in) H x 14.910 cm (5.87 in) W x 3.886 cm (1.53 in) D	.162 kg (.357 lbs)	US
8OPK-18	Type k pipe clamp thermocouple probe kit, 0-2.5	3448859	0 95969 49382 6	25.4 cm (10 in) H x 6.985 cm (2.75 in) W x 25.4 cm (10 in) D	.372 kg (.82 lbs)	US
FTP	Fused test probe set	3274829	0 95969 46027 9	30.48 cm (12 in) H x 9.525 cm (3.75 in) W x 4.445 cm (1.75 in) D	.086 kg (.189 lbs)	US
FTPL	Fused test probe set with test leads	3460786	0 95969 49621 6	30.48 cm (12 in) H x 9.525 cm (3.75 in) W x 4.445 cm (1.75 in) D	170 kg (.375 lbs)	US

Fluke. *Keeping your world up and running.®*

Fluke Corporation
PO Box 9090, Everett, WA USA 98206

Fluke Europe B.V.
PO Box 1186, 5602 BD
Eindhoven, The Netherlands

For more information call:
In the U.S.A. (800) 443-5853 or
Fax (425) 446-5116 or
Europe/M-East/Africa (31 40) 2675 200 or
Fax (31 40) 2 675 222 or
Canada (800) 36-FLUKE or
Fax (905) 890-6866
Other countries (425) 446-5500 or
Fax (425) 446-5116
Web access: <http://www.fluke.com>

©2009 Fluke Corporation.
Specifications subject to change without notice.
Printed in U.S.A. 3/2009 3448642 B-EN-N Rev A

Modification of this document is not permitted without written permission from Fluke Corporation.

FLUKE®

Fluke Corporation
PO Box 9090,
Everett, WA 98206-9090
USA

T  **USA**
Equipment
.NET
An Interworld Highway, LLC Company