

205 Westwood Ave Long Branch, NJ 07740 1-877-742-TEST (8378) Fax: (732) 222-7088

salesteam@Tequipment.NET

Fluke i30s AC/DC Current Clamp

FLUKE®

Technical Data



The i30s current clamp is based on Hall effect technology for use in measurement of both dc and ac current. The i30s may be used in conjunction with oscilloscopes and other suitable recording instruments for accurate non-intrusive current measurement.

Electrical specifications

Specified current range: 30 mA to 30 A DC,

30 mA to 20 A AC rms

Usable current range: 5 mA to 30 A DC,

30 mA to 20 A AC rms **Crest factor:** 1.4

Output sensitivity: 100 mV/A

Accuracy (at +25 °C): \pm 1 % of reading \pm 2 mA

Resolution: \pm 1 mA

Load impedance: $> 100 \text{ k}\Omega$

Conductor position sensitivity: \pm 1 % relative to

centre reading

Frequency range: DC to 100 kHz (- 0.5 dB) Phase shift below 1 kHz: < 2 degrees

Temperature coefficient: ± 0.01 % of reading/°C

Power supply: 9 V Alkaline, MN1604/PP3,

30 hours, low battery indicator

Working voltage (see Safety Standards section):

300 V ac rms or dc

General specifications

Maximum conductor size: 19 mm (.748 in) diameter

Output connection: Safety BNC connector, supplied with safety 4 mm (.157 in) adapter **Output zero:** Manual adjust via thumbwheel

Cable length: 2 m (6.56 ft)

Operating temperature range: 0 $^{\circ}$ C to +50 $^{\circ}$ C

(-32 °F to 122 °F)

Storage temperature range (with battery removed):

-20 °C to +85 °C (-4 °F to 185 °F)

Operating humidity: 15 % to 85 % (non-condensing)

Weight: 250 g (.55 lb)



Safety standards

BS EN 61010-1: 2001 BS EN 61010-2-032: 2002 BS EN 61010-031: 2002

300 Vrms, Category III, Pollution Degree 2

Use of the probe on uninsulated conductors is limited to 300 V acrms or dc and frequencies below 1 kHz.

EMC Standards


EN 61326: 1998 +A1, A2, & A3

Ordering information i30s AC/DC Current Clamp

i30s connected to a Fluke 199C ScopeMeter.

Dimensions (HxWxD)

183 mm x 71 mm x 25 mm (7.2 in x 2.8 in x 1 in)

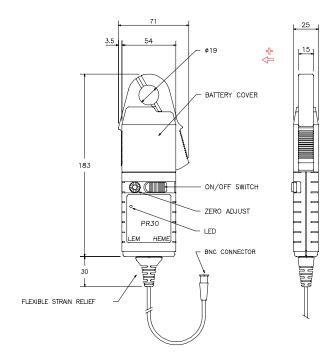



205 Westwood Ave Long Branch, NJ 07740 1-877-742-TEST (8378) Fax: (732) 222-7088 salesteam@Tequipment.NET