

# High Sensitivity AC Current Probe PR1200 X

- Wide dynamic range 0.001 A to 1200 A
- Accuracy class 0.5 % (IEC 185)
- Unique safety feature for short circuit protection - SIAC™ - Easy access in space restricted areas
- Up to 54 mm diameter for residual current measurements on multiple conductors
- Frequency range of 30 Hz to 10 kHz (-3dB)



## Description

The PR1200X current probe has been designed for use in low current, leakage current and differential current measurement applications for use with earth leakage detectors, multimeters, recorders and power analysers for accurate non intrusive measurement of AC current.

Using the latest transformer technology, the PR1200X can measure currents from 1 mA to 1200 A for which it give a proportional current output.

The probe complies with the safety standards EN 61010-2-032 for input and output circuits, ensuring safe protection when using equipment with floating inputs.

## Applications

All AC current measurement applications up to 1200 A<sub>RMS</sub> continuous and on uninsulated conductors up to 600 V<sub>RMS</sub> (see safety section)

## Enhanced protection against short circuits


- The "cover" over the jaw opening mechanism totally protects the jaws avoiding all accidental contact with the uninsulated conductors, as well as added protection against mechanical damage.

- A second patented safety feature called "SIAC™" (Safety Internal Anti Short Circuit), which is for internal safety against short-circuits. This system maintains a safety space on the lower internal aperture of the jaws during their closing to prevent potential short circuits.

With SIAC™ system there is no need for the usual protection at the tip of the jaws. This provides easy access for the current probe where space is restricted and ensures the jaw faces are kept clean and free of debris for accurate measurements.

SIAC™

Security

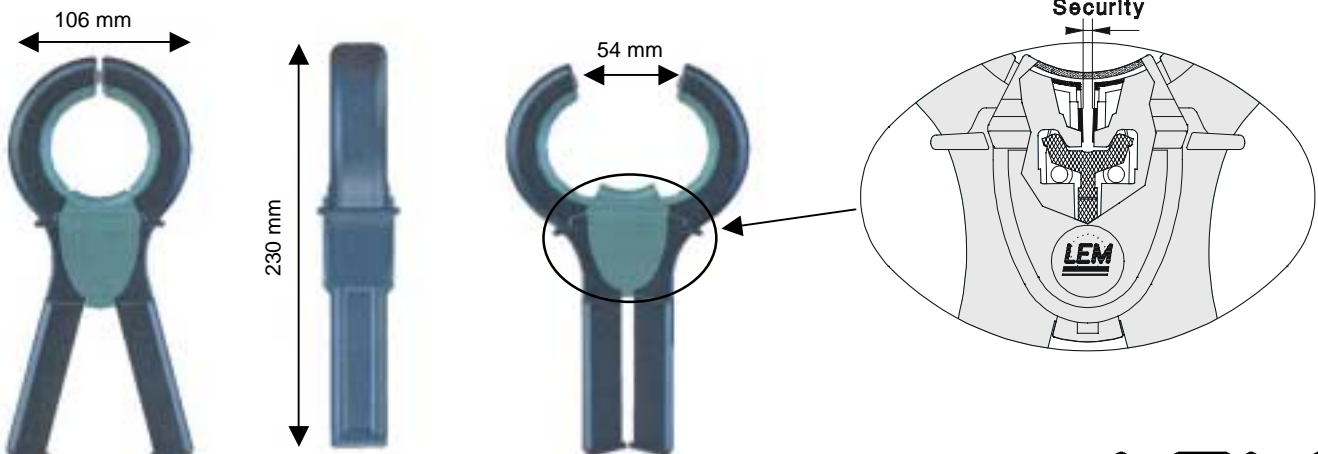

**LEM**

## Specifications

### Electrical Data

#### Common characteristics

Primary nominal current	1000 A <sub>RMS</sub>
Measuring range	0.001 A to 1200 A
Overload capability, for 1.5 hrs, 33 % duty cycle	1400 A, 50 / 60 Hz
Turns ratio	1000 / 1
Accuracy at 100 A, 2 kHz	1% of reading
Phase shift at 2 kHz	1 °
Frequency range	30 Hz to 10 kHz (-3 dB)

#### Typical accuracy and phase shift

Primary current	Accuracy (of reading)	Phase shift (degrees)
0.001 A to 10 A	± 3.0 %	Not specified
10 A	± 3.0 %	3.0°
50 A	± 1.5 %	1.5°
200 A	± 0.8 %	0.75°
1000 A - 1200 A	± 0.5 %	0.5°

	PR1200 X
Output signal	1 mA / A
External load impedance	≤ 20 Ω
Accuracy class(IEC 185)	0.5 %, ≤ 10 Ω 1.0 %, > 10 Ω
Output connection	4 mm safety socket

Ordering codes – Scope of delivery	Order no.
PR1200X 1200 A current output	60.95.62.005.0

### General Data

Dielectric withstand	5.5 kV / 50 Hz / 1min
Operating temperature	-10°C to +50°C
Storage temperature	-20°C to +70°C
Maximum relative humidity	85 %
Maximum altitude	2000 m
Environment	Indoor use only
Case material	UL 94 V0
Overall dimensions	230 x 106 x 44 mm
Weight	650 g
Jaw opening	54 mm
Conductor diameter	54 mm max. or 1 bar 50 x 5 mm

### Standards

Safety	European Low voltage Directives 72/23/EEC and 93/68/EEC European EMC Directives 89/336/EEC and 93/68/EEC IEC61010-1 : 1993 IEC61010-2-032: 1994 IEC61010-2-031: 1993 600 V RMS or DC, over voltage Cat. III, Pollution degree 2
EMC RF Susceptibility	EN 50082-1: 1992 3V/m Residential, Commercial and Light Industry
EMC RF Emissions	EN 50081-1: 1992 Residential, Commercial and Light Industry
Protection	FCC Part 15 Class B IP40 with jaws closed IP30 with jaws opened

Distributor:



LEM NORMA GmbH  
Export department  
Liebermannstraße F01  
CAMPUS 21  
A-2345 BRUNN AM GEBIRGE  
TEL.: +43(0)2236 691 502  
FAX: +43(0)2236 691 400  
E-mail: lna@lem.com

GREAT BRITAIN & IRELAND  
LEM UK LTD  
Geneva Court  
1 Penketh Place  
West Pimbo  
Skelmersdale, Lancashire WN8 9QX  
TEL: +44(0)1 695 72 07 77  
FAX: +44(0)1 695 50 704  
E-mail: luk@lem.com

NAFTA  
LEM Instruments Inc.  
23822 Hawthorne Boulevard #100  
US-TORRANCE, CA 90505  
TEL: +1 310 373 09 66  
FAX: +1 310 373 90 56  
E-mail: liu@lem.com

NETHERLANDS  
LEM Nederland B.V.  
Rijzendeweg 5  
NL-4634 TV  
WOENS DRECHT  
TEL: +31(0)16 46 154 62  
FAX: +31(0)16 46 166 06  
E-mail: lne@lem.com

BELGIUM & LUXEMBOURG  
LEM Belgium sprl-bvba  
Route de Petit-Roeulx, 95  
B-7090 BRAINE-LE-COMTE  
TEL: +32(0)67 55 01 14  
FAX: +32(0)67 55 01 15  
E-mail: lbe@lem.com

Printed in Austria  
Technical modifications reserved  
Publication A10326E