




Fluke Ti Series Buildings Thermal Imagers



Ti32 shown
with optional
wide angle lens



**The ultimate
tools for energy
audits, building
maintenance,
restoration and
remediation.**

Rugged, reliable, easy
to use... what you expect
from the worldwide leader
in test and measurement
tools—Fluke.



Where can thermal imaging save me time and money?



Why thermal imaging?

Productivity

Scan large areas quickly to detect problems or the extent of any damage. Whether you own your own business or maintain a commercial or residential facility, time is on your side when you use thermal imaging to get your work done.

Profitability


Turn to thermal imaging to drive improvements to your bottom line. Building inspections go much faster, saving you time and money—getting you to your next job faster. Use it to reduce energy usage or help keep mission critical equipment running.

Safety


Thermal imaging is a non-contact technology and can identify potential problems from a safe distance. Scan elevated or hard to reach surfaces without risking you or your employees' safety.

- Locate air leakage resulting from improperly installed or worn seals on windows and doors
- Verify missing, damaged or incorrectly installed insulation
- Detect moisture intrusion and the possible existence of mold or mildew
- Extend the life of roofs by locating and fixing leaks
- Locate damaged or unsealed components of HVAC/R systems (air conditioning, heating, air handlers, and refrigeration)


Visit www.fluke.com/tistories for a library of thermal imaging case studies and application notes.

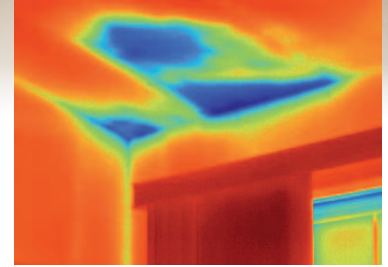


Insulation failures: Discover problems with insulation that result in elevated energy bills.

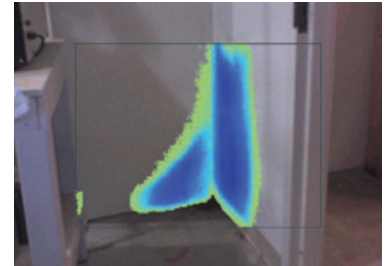

Moisture detection: Easily detect the extent of moisture damage behind interior walls, in ceilings and under carpets.

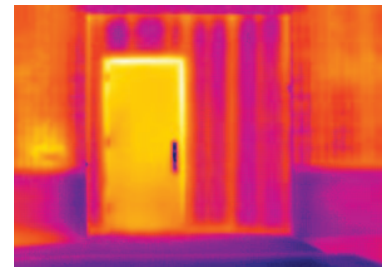

Air leakage: Identify sources of energy loss due to improperly installed or worn seals on windows and doors.

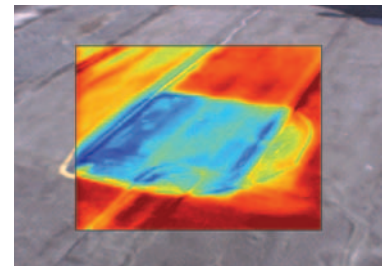

Roofing: Detect water-saturated insulation in flat-roof systems to locate damaged portions of roofing structure.



Building problems, defects and general maintenance



Energy audit, building inspection, and weatherization



Restoration, water damage, and roofing



Fluke Ti Series Building Diagnostic Thermal Imagers

FLUKE®

Superior image quality

Just pick up a Fluke imager and you'll immediately see the difference. Fluke delivers the clear, crisp images needed to find and fix problems fast.

- Industry leading thermal sensitivity (NETD) enables you to identify the small temperature differences that could indicate big problems
- Even the smallest details become visible with the large, widescreen full VGA color LCD display
- Patented IR-Fusion®, only from Fluke, delivers the industry's best visible/infrared image alignment and focusing

Easy to use

When you pick up a tool, you need it to operate and deliver results without having to read a heavy manual.

- Intuitive, three-button menu is easy to use... simply navigate with the push of a thumb
- Easy, manual focus allows for precise image viewing control
- File management is effortless with the Fluke proprietary .is2 file format, which automatically stores the visual image, infrared image, voice and text annotations in one simple file (other file formats are also supported both on imager and in SmartView software)

Rugged

Tools are meant to be used, and Fluke thermal imagers are designed to reliably operate in the toughest environments.

- Engineered and tested to withstand a 2 meter (6.5 foot) drop—when was the last time you dropped a tool?
- Withstands dust and water, tested to an IP54 rating
- Use in ambient temperatures as low as -10 °C (14 °F) and high as +50 °C (122 °F)



Fluke thermal imagers are built tough to withstand long hours in the field so users can move from job-to-job quickly.



Field replaceable batteries and optional visor on the TiR32 gives you maximum flexibility no matter where your work takes you.



Fluke TiR1




Award winning performance—what you've come to expect from Fluke.


- Plant Engineering 2008 Product of Year
- NECA (National Electrical Contractor's Association) Show Stopper Award
- IDCC Award for Excellence (International Die Casting Competition)
- Building Operating Management 2009 Top Products Award
- AHR Expo Innovation Award - Honorable Mention (Air-Conditioning, Heating, Refrigeration Expo)
- Control Engineering Engineer's Choice
- Refrigeration Service Engineers Society, Readers Choice
- International Design Magazine - 2009 Annual Design Review, Best in Category - Equipment, Ti25/Ti10
- CSE (Consulting Specifying Engineer) Magazine 2009 Product of the Year - Silver (Test instrument category)




IR-Fusion® samples



Full (traditional) infrared: Displays a full screen infrared view for maximum infrared detail.




Picture-in-picture: Maintains a frame of reference by placing an IR "window" within a visual (visible light) image.



Blending: Blends the visible and infrared images together in any user-selected proportion to create a more compelling, understandable image.



IR/color alarm: Isolates problematic areas by displaying a visual image with infrared highlights for surface temperatures in between, above or below, or outside a user-selected range.



Full Visual (visible light): Displays a digital photographic image, as you would get from a digital camera.

More than picture in picture

Infrared images alone can be difficult to understand, which is why Fluke pioneered IR-Fusion, a revolutionary marriage of visible and infrared images never before seen in commercial or industrial thermal imagers. Automatically capturing a visible image with every infrared image allows you to always know exactly what you're looking at.

Not all fusion is created equal

Don't be fooled by imitators. Patented IR-Fusion is the only solution with physical parallax correction, enabling the perfect alignment and blending of both infrared and visible images. While many manufacturers have attempted to duplicate Fluke IR-Fusion, none have been able to match it. Turn to Fluke IR-Fusion to deliver the industry's best thermal images.

Thermal imager features



SmartView® Software

Powerful

Everything you need for analysis and reporting.

- Extensive annotation, editing, and viewing options with full IR-Fusion® capabilities
- 3D-IR™ delivers unique three-dimensional analysis capabilities
- Multiple reporting options and templates

Easy to use


It's never been easier to enhance and analyze your thermal images.

- SmartView tools and controls allow easy access to editing functions
- Report Wizard guides you through automatic, professional report generation


Included with every imager

Fluke includes SmartView software with unlimited licenses and lifetime upgrades with every thermal imager.

- No need to pay extra for a professional software solution

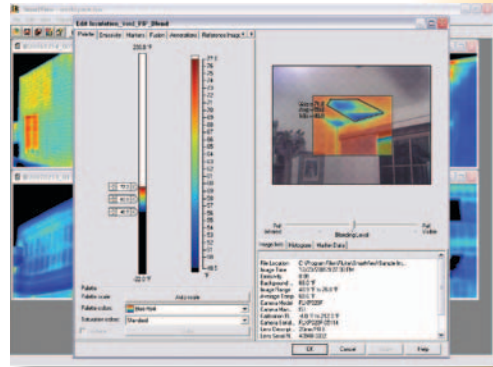

Navigate, analyze and enhance IR images.

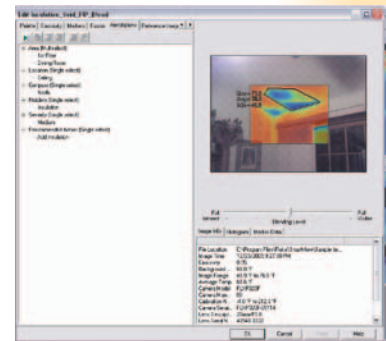

Organize data with extensive annotations.

SmartView® system requirements

Software requirements


- Microsoft Windows XP/Vista
- Web browser for product registration and viewing FAQs: Microsoft® Internet Explorer 5.0 or newer
- Microsoft® Word 2007 for report template modification (optional)

Hardware requirements

- Memory card reader to transfer images to computer (included)
- 512 MB RAM (1GB for Vista), not including the space requirements for web browser and Microsoft® Word
- 16-bit color, 1024x768 resolution video or better
- Color printer for printing images (optional)
- CD-ROM drive for installing SmartView software



Simplified professional report generation.

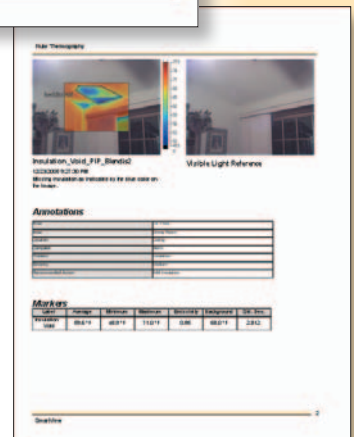

Fluke training solutions



FLUKE®

Fluke authorized training is provided by our partner,



Unsure where to begin with your new thermal imager?


Don't worry. Fluke utilizes an extensive network of industry experts to deliver a full portfolio of training solutions.

- **Free in-box training DVD:** This convenient training solution provides a general introduction to thermal imaging, product information, and common applications.
- **Free online webinars:** Fluke offers both pre-recorded and live webinars to meet the needs of busy professionals. Visit www.fluke.com/titraining for course listings and schedules.
- **Advanced training:** For advanced thermography (Level I to Level III) and application specific training either online, in the classroom or at your site, sign up through Fluke authorized, independent training partners. Visit www.fluke.com/titraining for training options and schedules.




For definitions of thermal imaging terminology go to www.fluke.com/terminology


Fluke palette options (six of 16 available, varies by model)



Ironbow



Blue-red



High contrast



Amber



Hot metal



Grey

Specifications

	TiR32	TiR1	TiR
Temperature			
Temperature measurement range (not calibrated below -10 °C)	-20 °C to +150 °C (-4 °F to +302 °F)	-20 °C to +100 °C (-4 °F to +212 °F)	-20 °C to +100 °C (-4 °F to +212 °F)
Temperature measurement accuracy	± 2 °C or 2 % (at 25 °C nominal, whichever is greater)		± 5 °C or 5 % (at 25 °C nominal, whichever is greater)
On-screen emissivity correction	Yes		—
On-screen reflected background temperature compensation	Yes		—
On-screen transmission correction	Yes		—
Imaging performance			
Image capture frequency	9 Hz refresh rate or 60 Hz refresh rate depending upon model variation	9 Hz refresh rate	
Detector type	320 X 240 Focal Plane Array, uncooled microbolometer	160 X 120 Focal Plane Array, uncooled microbolometer	
Thermal sensitivity (NETD)	≤ 0.05 °C at 30 °C target temp. (50 mK)	≤ 0.07 °C at 30 °C target temp. (70 mK)	≤ 0.1 °C at 30 °C target temp. (100 mK)
Infrared spectral band	7.5 μm to 14 μm (long wave)		
Visual (visible light) camera	Industrial performance 2.0 megapixel	Industrial performance 1.3 megapixel	
Minimum focus distance	46 cm (approx. 18 in)		
Standard infrared lens type			
Field of view	23 ° x 17 °		
Spatial resolution (IFOV)	1.25 mRad		
Minimum focus distance	15 cm (approx. 6 in)		
Optional telephoto infrared lens type			
Field of view	11.5 ° x 8.7 °	—	
Spatial resolution (IFOV)	0.63 mRad	—	
Minimum focus distance	45 cm (approx. 18 in)	—	
Optional wide-angle infrared lens type			
Field of view	46 ° x 34 °	—	
Spatial resolution (IFOV)	2.50 mRad	—	
Minimum focus distance	7.5 cm (approx. 3 in)	—	
Focus mechanism	Manual, one-handed Smart Focus capability		
Image presentation			
Palettes			
Standard	Ironbow, Blue-Red, High Contrast, Amber Inverted, Hot Metal, Grayscale, Grayscale Inverted	Ironbow, Blue-Red, High Contrast, Amber, Hot Metal, Grayscale	Ironbow, Blue-Red, High Contrast, Grayscale
Ultra Contrast™	Ironbow Ultra, Blue-Red Ultra, High Contrast Ultra, Amber Ultra, Amber Inverted Ultra, Hot Metal Ultra, Grayscale Ultra, Grayscale Inverted Ultra	—	
Level and span	Smooth auto-scaling and manual scaling of level and span		
Fast auto toggle between manual and auto modes	Yes	—	
Fast auto-rescale in manual mode	Yes	—	
Minimum span (in manual mode)	2.0 °C (3.6 °F)	2.5 °C (4.5 °F)	
Minimum span (in auto mode)	3 °C (5.4 °F)	5 °C (9 °F)	
Image capture and data storage			
	The TiR32 allows user to adjust palette, blending, level, span, IR-Fusion® mode, emissivity, and reflected background temperature compensation, and transmission correction on a captured image before it is stored.	The TiR1 allows user to adjust palette, blending, level, span, IR-Fusion® mode, emissivity, and reflected background temperature compensation on a captured image before it is stored.	—
Image capture, review, save mechanism	One-handed image capture, review, and save capability		
Storage medium	SD Memory Card (2 GB memory card will store at least 1200 fully radiometric (.is2) IR and linked visual images each with 60 seconds voice annotations, or 3000 basic bitmap (.bmp) images, or 3000 jpeg (.jpeg) images; transferrable to PC via included multi-format USB card reader (TiR32 and TiR1 only)		
File formats	Non-radiometric (.bmp) or (.jpeg) or fully-radiometric (.is2)	Non-radiometric (.bmp) or fully-radiometric (.is2)	
	No analysis software required for non-radiometric (.bmp and .jpeg) files	No analysis software required for non-radiometric bitmap (.bmp) files	
Export file formats w/SmartView® software	JPEG, JPG, JPE, JFIF, BMP, DIB, GIF, PNG, TIF, and TIFF		
Memory review	Thumbnail view navigation and review selection	Sequential image navigation and review	

For detailed product specifications download the datasheet at www.fluke.com/TIRspecs

Thermal imaging accessories



Everything you need to get started is included:

- In-box training DVD
 - SmartView® analysis and reporting software
 - 2 GB SD Memory Card
 - Multi-function Memory Card Reader for downloading images into your computer
 - Rugged, hard carry case and portable, soft carry case
 - Hand strap, adjustable for left of right handed user
 - Rechargeable battery (TiR32 includes two external smart rechargeable batteries)
 - AC charger/power supply
- Note: Included accessories vary by model.

Ordering information

FLK-TiR32 9Hz Building Diagnostics Thermal Imager, 9 Hz

FLK-TiR32 60Hz Building Diagnostics Thermal Imager, 60 Hz

FLK-TiR1 9Hz Thermal Imager

FLK-TiR 9Hz Thermal Imager

Expand your thermal imaging capabilities with the following Fluke accessories:



BOOK-ITP Introduction to Thermography Principles Book



FLK-LENS/TELE1 Telephoto Infrared Lens (TiR32 only)



FLK-LENS/WIDE1 Wide-angle Infrared Lens (TiR32 only)



TI-CAR-CHARGER Thermal Imager Vehicle Charger



TI-VISOR Thermal Imager Visor



Extra battery (TiR32 only)



TI-SBC3 Charging Base (TiR32 only)



TI-TRIPOD Tripod Mounting Base Accessory

For information:

United States
1-800-760-4523

Canada
1-800-363-5853

Australia
(02) 8850-3333



205 Westwood Ave
Long Branch, NJ 07740
1-877-742-TEST (8378)
Fax: (732) 222-7088
salesteam@Tequipment.NET