


New

INFRARED THERMO HiTESTER 3419-20

Environmental measuring instruments 

Pistol design with easy-to-see display
Measuring couldn't be easier !



Measure safely even in dangerous places



-  Easy Battery Replacement
-  F/C Selectable
-  Audible Alarm Feature



ISO 9001
JMM-0216



ISO 14001
JQA-E-90091



www.hioki.com

HIOKI company overview, new products, environmental considerations and other information are available on our website.

One-touch measurement – just pull the trigger



Begin measuring




Useful Functions

- Max/Min Function
- Upper and Lower Alarm Setting
- Stores up to 50 measurements
- Auto Power Off
- Backlight

Specifications

Detection element	Thermopile
Measurement temperature range	-35 to 500 °C (-31 to 932 °F)
Display resolution	0.1 °C (0.2 °F)
Response time	2 times/ second
Measurement wavelength	6 to 14 μm
Thermal emissivity compensation	0.17 to 1.00 by steps of 0.01
Diameter of field of measurement	125 mm at 1000 mm (D : S= 8 : 1)
Sighting	Laser marker MAX 1 mW (class 2), Red
Low-battery warning	The low-battery indicator appears when voltage falls below 7.0 V.
Power supply	6F22 manganese battery × 1 or 6LR61 alkaline battery × 1
Continuous operating time	Approx. 55 hours (manganese battery), Approx. 80 hours (alkaline battery), When laser marker and backlight are OFF
Accuracy	± 2 % rdg. or ± 2 °C, 4 °F whichever value is higher.
Temperature coefficient	Measurement accuracy × 0.1/ °C
Dimensions	Approx. 46 W × 172 H × 118 D mm (1.81" W × 6.77" H × 4.65" D)(excluding projections)
Mass	Approx. 220 g (7.8 oz.) (including manganese battery × 1)
Location for use	Indoors, altitude up to 2000 m (6562-ft.)
Operating temperature and humidity	0 to 50°C (32°F to 122°F), 80%RH or less (non-condensating)
Storage temperature and humidity	-10 to 50°C (14°F to 122°F), 80%RH or less (non-condensating) 50 to 60°C (122°F to 140°F), 70%RH or less (non-condensating)
Applicable standards	EMC : EN61326 Laser : IEC60825-1 CLASS 2 LASER
Additional Function	MAX/ MIN display, Alarm function, Backlight function, Memory (50 data)
Accessories	Instruction manual, 6F22 manganese battery × 1(supplied with this product for monitor), Carrying case × 1

Measurement focus

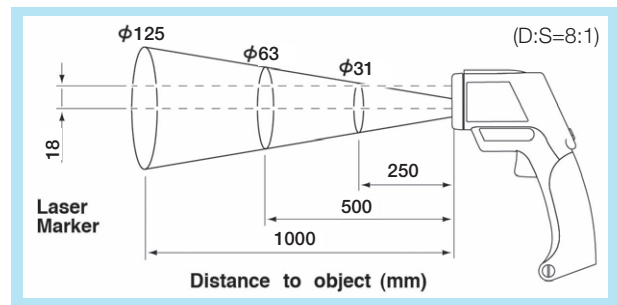

Option

Black body tape

(50 mm × 10 m, 1 roll) Withstands 180°C ε=0.95

*Optional use of black body tape allows increased emissivity in order to obtain accurate temperature measurements on low-emissivity materials such as metals.



Accessories
Carrying case

Laser Product Caution Notice

A caution label is attached to the HiTester. Be sure to observe the operating precautions on the label.



HIOKI
HIOKI E. E. CORPORATION

HEAD OFFICE :
81 Koizumi, Ueda, Nagano, 386-1192, Japan
TEL +81-268-28-0562 / FAX +81-268-28-0568
E-mail: os-com@hioki.co.jp

HIOKI USA CORPORATION :
6 Corporate Drive, Cranbury, NJ 08512 USA
TEL +1-609-409-9109 / FAX +1-609-409-9108
E-mail: hioki@hiokiusa.com

HIOKI (Shanghai) Sales & Trading Co., Ltd. :
1608-1610 Shanghai Times Square Office, 93 Huai Hai Zhong Road, Shanghai, P.R.China POSTCODE: 200021
TEL +86-21-6391-0090/0092 FAX +86-21-6391-0360
E-mail: info-sh@hioki.com.cn
Beijing Office :
A-2602 Freetown, 58 Dong San Huan Nan Road Beijing, P.R.China POSTCODE: 100022
TEL +86-10-5867-4080/4081 FAX +86-10-5867-4090
E-mail: info-bj@hioki.com.cn
Guangzhou Office :
Room A-3206, Victory Plaza Services Center, No.103, Tiyuxi Road, Guangzhou, P.R.China POSTCODE: 510620
TEL +86-20-38392673/2676 FAX +86-20-38392679
E-mail: info-gz@hioki.com.cn

DISTRIBUTED BY

Equipment.NET
205 Westwood Ave
Long Branch, NJ 07740
1-877-742-TEST (8378)
Fax: (732) 222-7088
salesteam@Equipment.NET