

Tequipment
.NET



205 Westwood Ave
Long Branch, NJ 07740
1-877-742-TEST (8378)
Fax: (732) 222-7088
salesteam@Tequipment.NET

HIOKI

OPTICAL POWER METER 3661-20 LASER LIGHT SOURCE 3662-20, 3663-20

Optical/Telecom Measurement



Improved!

Wider wavelength range
800 to 1660 nm

(Register up to 8 custom wavelengths
adjustable in 5nm units)

Reliable Testing of Optical Power Loss



3661-20
includes
Memory
&
USB_{1.1}
Interface



ISO 9001
JMI-0216



ISO140
JQA-E-9009

Quickly collect data and process it later on a computer

Features of 3661-20

Simple and intuitive operation

Large LCD shows measurement results and memory data at a glance Ergonomic key layout

Large Memory

*Store 1000 sets of data for each registered wavelength

*Register up to 8 custom wavelengths adjustable in 5nm units

Effective data processing

USB interface and supplied application software allows easy data management on a computer



Keep the connector safe from dust and mechanical damage with sturdy cover.

Attach supplied strap here for total convenience and portability.

Optical Loss measurement

After obtaining an optical power value to be used as reference, the measurement result is compared to this reference and the loss is automatically shown on the display.

Step 1

Connect light source to 3661-20 with short reference cable (about 2 m).

Step 2

Select wavelength to be measured according to light source.

Step 3

Switch to POWER display to measure optical power received from light source. Store this as reference value.


Step 4

Connect light source and 3661-20 to both ends of cable to be measured.

Step 5

Switch to the LOSS display to measure power loss.


Store the results in memory.



Attach connector cover here to prevent dust from accumulating on the connector.



Top view of 3661-20

Mount optional FC or SC connector here.

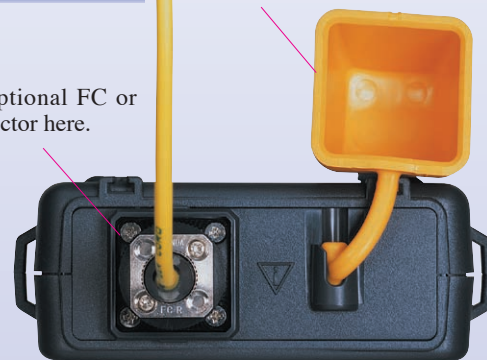

Optical Power measurement

Easily measure absolute value of input optical power. Save results in memory.





3662-20: 1550 nm 3663-20: 1310 nm Two types of laser light sources



Features of 3662-20 3663-20

- ❑ Compact size for easy handling


Dimensions: approx. 76 (W) × 159 (H, including cover) × 35 (D) mm
Mass: approx. 180 g (without batteries)

- ❑ Continuous or modulated light output

Continuous wave (CW) output or 3 types of modulated light output (270 Hz, 1 kHz, 2 kHz) can be selected.

Top view of 3662-20

Mount optional FC or SC connector here.



Attach connector cover here to prevent dust from accumulating on the connector.

Hand strap

Transfer up to 1000 data for each wavelength

To PC



USB connector with dust cover




Use supplied USB cable


Saved data collected with the 3661-20 in the field can be downloaded to a computer via the USB interface. The data are in CSV format, suitable for further processing with spreadsheet software.

Software Specifications

- Operating environment: Windows 98, Me, 2000, and XP. CPU, RAM and display requirements follow the specifications of the respective operating system. At least 10 Mbytes of free hard disk space are required.
- Function: Download measurement data stored in memory to a computer via USB cable connection.
- File format: CSV
- Interface standard: USB Ver. 1.1 or later



Free PC Software



Example of data imported into Excel

	A	B	C	D	E	F	G	H	I	J
1	HIOKI 3661 Measurement Data									
2	Comment: 1550_1310_850									
3	Serial No: 021300003									
4	Wave Length Data									
5	1550nm	10								
6	1310nm	257								
7	850nm	100								
8										
9										
10	Address No.	1550nm	1310nm	850nm						
11	0	Power[dBm]	Loss[dB]	Reference[dBm]	Power[dBm]	Loss[dB]	Reference[dBm]	Power[dBm]	Loss[dB]	Reference[dBm]
989	978		-52.29							
990	979		-53.05							
991	980		-52.86							
992	981		-52.77					11.49		-31.67
993	982		-52.77							
994	983		-52.78							
995	984		-52.72							
996	985		-52.7							
997	986		-52.73							
998	987		-52.75							
999	988		-52.88							
1000	989		-52.73							
1001	990	5.26	-45.81	-52.89						
1002	991	5.22	-46.81	-52.72						
1003	992	5.24	-46.81	-52.71						
1004	993	5.18	-46.81	-52.84						
1005	994	5.27	-46.81	-52.67						
1006	995	5.35	-46.81	-52.76						
1007	996	0.18	-59.81	-52.57						
1008	997	0.00	-59.81	-52.63						

Related products



Network Construction with One Single Instrument

- ❑ Wiremap (Detect Split Pairs with Wiring Check)
- ❑ Cable Length (Get NVP-Enhanced Measurement Accuracy)
- ❑ Direction (Identify Up to 21 Cable Destinations)

LAN CABLE HiTESTER 3665-20

3661-20 OPTICAL POWER METER Specifications

Specifications apply to temperature range 23 °C ±5 °C, HIOKI reference wavelength 1310 nm and 1550 nm*, power -10 dBm, CW, single mode fiber, FC master connector, PC finish

Measurement functions	Optical power measurement (dBm) Measure absolute value of input optical power Optical loss measurement (dB) Automatically compare measured power with previously input reference value to calculate and display loss
Calibration wavelength	850 nm, 1310 nm, 1550 nm
Measurable wavelength	800 to 1660 nm (Register up to 8 custom wavelengths adjustable in 5nm units) 8 default wavelengths preset at 850, 1300, 1310, 1470, 1490, 1550 1625, and 1650 nm
Range	-60 dBm to +9 dBm (auto range)
Accuracy(1310/1550 nm)	±0.22 dB (±5 %) at -10 dBm
Resolution	0.01 dBm (optical power), 0.01 dB (optical loss)
Rated max.	+10 dBm
Connector	FC, SC (using optional connector adapter)
Fiber type	Single mode, multi mode (core dia. 62.5 μm max. NA: 0.275 max.)
Light receiver	InGaAs (dia. 1 mm)
Display update rate	Approx. 3 times/s (approx. 350 ms)
Memory	Max. 1000 data per wavelength
Interface	USB (Ver. 1.1) Dedicated PC application software allows transfer of measurement data from the 3661-20 memory to a computer
Functions	Auto power save (after about 10 minutes of inactivity; defeatable) Settings backup (settings are automatically stored at power-off) Battery check (symbol appears when voltage drops below approx. 4 V)
Applicable standards	Safety: EN61010-1 Pollution degree 2 EMC: EN61326 +A1+A2+A3
Operation temp.	0 °C to 40 °C, 80 %rh or less, no condensation
Storage temp.	-10 °C to 50 °C, 80 %rh or less, no condensation
Power supply	LR6(AA) alkaline battery×4
Max. rated power	0.5 VA
Operating time	Approx. 40 hours (continuous use)
Dimensions and mass	Approx. 85 W ×192 H (including 36 mm cover) × 35 D mm, Approx. 300g (without batteries) (Approx. 3.35"(W)7.56" (H)1.38" (D), Approx. 10.6 oz.)

OPTICAL POWER METER 3661-20

Includes Free PC Software application **DOWNLOAD UTILITY** CD-R, USB cable (1m), **CARRYING CASE 3853** (for 3661-20 main unit), Strap

For optical fiber cable measurement with the 3661-20, an optional connector adapter must be selected.

3661-20 options



FC CONNECTOR ADAPTER 9731



SC CONNECTOR ADAPTER 9732

3661-20, 3662-20, 3663-20 common options



CARRYING CASE 9730
(Holds 3661-20, 3662-20 and 3663-20)



FC-FC OPTICAL FIBER CABLE 9735
SC-SC OPTICAL FIBER CABLE 9736
SC-FC OPTICAL FIBER CABLE 9737
(1.3 μm-band single-mode optical fiber cable, 2 m)



OPTICAL CONNECTOR CLEANER 9738



SPARE CLEANER 9739
(30 m × 6 rolls set)

HIOKI

HIOKI E. E. CORPORATION

3662-20, 3663-20 LASER LIGHT SOURCE Specifications

Specifications apply to temperature range 23 °C ±5 °C, single mode fiber, FC master connector, PC finish, at output end of 2m cable

Light-emitting element	Semiconductor laser diode
Output connector	FC, SC (using optional connector adapter)
Fiber type	Single mode
Output mode	Continuous wave (CW) or modulated light (270 Hz, 1 kHz, 2 kHz)
Output wavelength	Output : 1310 ±20 nm (3663-20) 1550 ±20 nm (3662-20)
Spectrum width	5 nm max.
Output level	-6 ±2 dBm
Output level stability	Output level : Within ±0.1 dB (temperature constant, 5 minutes) Within 1.0 dB p-p (ambient temperature 0 to 40 °C, 8 hours)
Functions	Battery check (indicator flashes when battery voltage drops)
Applicable standards	Safety: EN61010-1 Pollution degree 2 EMC: EN61326+A1+A2+A3 Laser: IEC 60825 -1, Class 1 Laser Complies with 21 CFR 1040.10 and 1040.11 except for deviations pursuant to Laser Notice No.50, dated July 26,2001.
Operation temp.	0 °C to 40 °C, 80 %rh or less, no condensation
Storage temp.	-10 °C to 50 °C, 80 %rh or less, no condensation
Power supply	LR6(AA) alkaline battery×2
Max. rated power	0.6 VA
Operating time	Approx. 20 hours (3662-20 , continuous CW output) Approx. 36 hours (3663-20 , continuous CW output)
Dimensions and mass	Approx. 76 W ×159 H (including 36 mm cover) × 35 D mm, Approx. 180g (without batteries) (Approx. 3.00"(W)6.26" (H)1.38" (D), Approx. 6.35 oz.)

* HIOKI reference wavelength

The calibration wavelength is a value inherent to the light source used for adjustment and calibration purposes. Normally, the sensitivity of a light receiver will be wavelength dependent, and there will also be individual tolerances. The output of the laser light source used for adjustment and calibration purposes will have the inherent wavelength of the source. For reasons related to continued equipment maintenance, it is not possible to specify a constant value for this wavelength. In order to avoid ambiguity when stating measurement accuracy, we therefore use the expression "HIOKI reference wavelength".

LASER LIGHT SOURCE 3662-20 (1550 nm)

LASER LIGHT SOURCE 3663-20 (1310 nm)

Includes hand strap, carrying case (for 3662-20, 3663-20 main unit) with both models

The 3662-20 and 3663-20 are Class 1 Laser products conforming to IEC 60825-1 **CLASS 1 LASER PRODUCT**

For optical fiber cable measurement with the 3662-20 and 3663-20, an optional connector adapter must be selected.

3662-20, 3663-20 options



FC CONNECTOR ADAPTER 9733



SC CONNECTOR ADAPTER 9734

TEquipment.NET



205 Westwood Ave
Long Branch, NJ 07740
1-877-742-TEST (8378)
Fax: (732) 222-7088
salesteam@Tequipment.NET