

# IN5300 (SERIES)

**InFocus**  
Bright Ideas Made Brilliant



Brightness, Flexibility and Performance for  
Your Conference Room or Medium Venue

**Touchboards**  
205 Westwood Ave, Long Branch, NJ 07740  
Phone: 866-94 BOARDS (26273) / (732)-222-1511  
Fax: (732)-222-7088 | E-mail: [sales@touchboards.com](mailto:sales@touchboards.com)

# IN5300 (SERIES)

## Bring Clear Communications to Your Large Conference Room or Classroom

The InFocus IN5300 Series DLP® projectors are professional display devices for professional installations – and are also a great value.

Stunning image quality, brightness, and flexibility are all vital and these large venue projectors have them covered and then some. A broad range of connectivity, three lens options, and a small form factor help these projectors fit into a wide variety of venues, such as large classrooms or conference rooms and houses of worship.

InFocus has been in the display business for about as long as there's been such a thing – it's all we do. Our experience shows in the quality and flexibility of these projectors as well as in our service and support.

### Why choose the IN5300 Series?

- Up to 4500 lumens display bright, clear images even in rooms where lighting is still needed
- Full range of resolution options including 1080p and WUXGA
- Three lenses choices: standard lens, short throw, long throw
- DisplayPort on IN5316HD/IN5318 models is the most powerful digital display connection to date
- HDMI and DVI-D digital inputs on IN5312/IN5314 models
- Lens shift to get your image in the perfect position
- 24/7 rated; no filters to clean or replace
- 3D capable (IN5312 and IN5314 only)
- 5-year limited warranty, plus extended warranty options



#### IN5312

XGA  
(1024 x 768)  
4500 lumens

#### IN5314

WXGA  
(1280 x 800)  
4000 lumens

#### IN5316HD

1080P  
(1920 x 1080)  
4000 lumens

#### IN5318

WUXGA  
(1920 x 1200)  
4000 lumens

## Flexibility for Perfect Image and Projector Placement

### Optional Lenses

The IN5300 Series projectors come with a standard zoom lens and offer 2 optional lenses – short throw and long throw – to fit your unique space or application. It only takes seconds to swap lenses – just pull one out and snap the other into place.

### Lens Shift

Horizontal and vertical lens shift help you get the image exactly where it needs to be – providing extra flexibility for projector placement.

### Resolutions for Any Need

The widest range of resolutions we've ever offered in a product family. This includes the latest 1080p resolution (1920 x 1080) that brings true high definition out of the home and into the conference room or classroom.

### 24/7 Rated

The IN5300 DLP projectors are filter-free and rated for 24/7 fail-safe operation. Plus, replacing a lamp is easy thanks to the ceiling-accessible lamp door.

## Connectivity for Today's Digital World

### HDMI and DVI Digital Inputs

Few projectors offer HDMI and DVI-D digital inputs. The IN5312 and IN5314 provide both to suit the needs of its users now and in the future.

### DisplayPort Technology

The IN5316HD and IN5318 up the ante with DisplayPort, the most powerful display connection to date. It's compatible with a slew of current and emerging connection types, such as Thunderbolt.

### RGBHV/YPbPr BNC Inputs

The IN5300 Series of projectors are compatible with the leading professional switching and signal processing equipment from leading manufacturers like EXTRON, KRAMER, IN-LINE, and more.

### Control It Your Way

Use the RS232 port to add the IN5300 to your room control system such as Crestron, AMX, SPcontrols, and others. Or, use the RJ45 port to interface with your network control system such as Crestnet, AMX Device Discovery, and InFocus ProjectorNet.

### Assignable Audio

Pick which audio input/connector you would like to use with each display input. Only available on IN5316HD and IN5318 models.

## Powerful and Efficient

### High and Higher Brightness

The 4000 lumens of the IN5314, IN5316HD and IN5318 display crisp, detailed images even in bright rooms. But if even more brightness is needed, you can bump it up to 4500 lumens with the IN5312. Plus, their single-lamp design makes it economical and easy to maintain.



IN5312/IN5314 Back Panel

### Comprehensive Connectivity Options

HDMI 1.3	DVI-D (IN5312/IN5314 only)
VGA x 2	DisplayPort (IN5316HD/IN5318 only)
S-Video	5 BNC (RGBHV/YPbPr)
Component Video	Composite Video

### 3D Capable

The IN5312 and IN5314 are the first InFocus installation projectors to be 3D capable. Display 3D content – such as visualizations and virtual walkthroughs in medicine, architecture and engineering – created in the top emerging 3D standards.

### Control and Monitor Over Your Network

Network administrators can remotely access and control the projector over standard LAN/WAN, including scheduling start-up and shut-down times to save energy and lamp life.

### Wireless Ready

Free yourself from cables and speed your set-up time with the optional InFocus LiteShow III wireless adapter. Switch presenters in seconds and transmit data, audio, and video over a 300-foot (91m) range.



LiteShow III

# Specifications\*

	IN5312	IN5314	IN5316HD	IN5318
Native Resolution	XGA (1024 x 768)	WXGA (1280 x 800)	1080p (1920 x 1080)	WUXGA (1920 x 1200)
Display Technology	.7" DC3 DLP	.65" DC2 DLP	.65" DC3 DLP	.67" DC3 DMD
Brightness	4500 lumens		4000 lumens	
Lamp Life**	2000 hours Eco Mode (1500 hours Normal)			
Lamp Power	330 W UHP			
Contrast Ratio	2000:1			
Lens Type	Manual zoom, focus and shift			
Lens Shift - Vertical	-40% ~ 0%		-35% ~ 5%	
Lens Shift - Horizontal		+5%		
Standard Lens - Throw Ratio	1.6 ~ 2.0	1.62 ~ 2.03		1.54 ~ 1.93
Standard Lens - Zoom Ratio	1.25:1			
Short Throw Lens - Throw Ratio	0.8	0.81		0.77
Short Throw Lens - Zoom Ratio	Fixed			
Long Throw Lens - Throw Ratio	2.0 ~ 3.0	2.02 ~ 3.03		1.93 ~ 2.89
Long Throw Lens - Zoom Ratio	1.6x			
Aspect Ratio (Native)	4:3	16:10	16:9	16:10
Aspect Ratio (Supported)	4:3, 16:10, 16:9, Auto			
Synch - Horizontal Scan Freq	15 - 106 kHz			
Synch - Vertical Scan Freq	50 - 120 Hz			
Connections (Input)	VGA x 2, HDMI x 1, DVI-D x 1, Composite video x 1, S-Video x 1, Component RCA x 3, RGBHV 5 BNC x 1, Mini Jack x 3, RCA R&L x 2		VGA x 2, HDMI x 1, DisplayPort x 1, Composite Video x 1, S-Video x 1, Component RCA x 3, RGBHV 5 BNC x 1	
Connections (Output)	Monitor out, Audio out			
Control	Projector keypad, IR remote, RS232, RJ45, USB Type B for mouse, Wired remote (optional)			
Network	10 BASE-T, 100 BASE-TX			
Audio	3W X2			
Video Compatibility	SDTV (NTSC, PAL, SECAM, 480i, 576i), ED/HDTV (480p, 576p, 720p, 1080i, 1080p)			
Audible Noise (Eco/Normal)	31 dB / 34 dB			
3D Capable	Yes			No
Computer Compatibility	PC, Mac, Linux			
Number of Colors	16.7 Million			
Product Weight	10.56 lbs / 4.8 kg			
Product Dimensions	16.9 x 13.3 x 6.9 in / 430 x 338 x 175 mm			
Shipping Weight	18 lbs / 8.2 kg			
Shipping Dimensions	22 x 16.5 x 7.8 in / 560 x 420 x 197 mm			
Maximum Altitude	7500 feet / 2286 meters			
Operating Temperature	41 - 95° F / 5 - 35° C			
Projector Warranty	5 years (extended warranties available)			
Lamp Warranty	6 months			
Accessories Warranty	90 days			
Standard Accessories	Power Cord, RGB Cable, Safety Instructions, User Manual, Remote Control, Lens Cap			
Menu Languages	17 languages (English, French, German, Italian, Korean, Norwegian, Portuguese, Russian, Simplified Chinese, Spanish, Traditional Chinese, Swedish, Dutch, Polish, Turkish, Danish and Finnish)			
Approvals	UL and c-UL (US/Canada), FCC (US/Canada), CE (Europe)			

\* Product specifications, terms, and offerings are subject to change at any time without notice.

\*\* Actual lamp life may vary based on the ambient environment and projector usage. Conditions that may affect lamp life include temperature, altitude, and rapidly switching the projector on and off.

## Optional Accessories


Replacement Lamp (SP-LAMP-073)  
 Short Throw Fixed Lens (LENS-060)  
 Long Throw Zoom Lens (LENS-061)  
 Universal Ceiling Mount (PRJ-MNT-UNIV)  
 LiteShow III Wireless Adapter (INLITESHOW3)  
 Mount for LiteShow (PRJ-MNT-LS3)  
 Cables and adapters  
 Screens  
 Extended warranties

For more information, please visit:  
[www.infocus.com/accessories](http://www.infocus.com/accessories)

## Warranty

The IN5300 Series projectors come standard with a 5-year limited factory warranty (including parts<sup>1</sup> and labor<sup>2</sup>) and a 6-month limited lamp replacement warranty. Extended product and lamp warranty programs are also available.

For more information, please visit:  
[www.infocus.com/support/warranty](http://www.infocus.com/support/warranty)

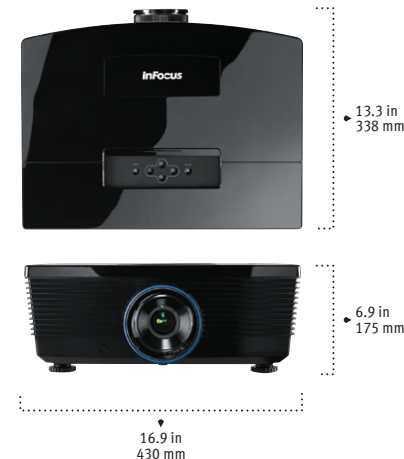

**InFocus**  
 Bright Ideas Made Brilliant

**Touchboards**

205 Westwood Ave, Long Branch, NJ 07740  
 Phone: 866-94 BOARDS (26273) / (732)-222-1511  
 Fax: (732)-222-7088 | E-mail: [sales@touchboards.com](mailto:sales@touchboards.com)

©2011 InFocus Corporation. All rights reserved. Specifications are subject to change without further notice. InFocus and InFocus Bright Ideas Made Brilliant are either trademarks or registered trademarks of InFocus Corporation in the United States and other countries. DLP, the DLP logo, and the DLP medallion are trademarks of Texas Instruments. All trademarks are used with permission or are for identification purposes only and are the property of their respective companies. <sup>1</sup>Excludes power supply, fans, color wheel and light tunnel which are covered for two (2) years. <sup>2</sup>Labor is covered for two (2) years from date of proof of purchase. InFocus\_IN5300\_NewSeries\_4Models\_DS\_EN\_10MAY12. Part Number: MMINFOCUS-0204