PC190 Podium Camera The Audio Video Camera



The Lumens[™] PC190 Podium Camera is a professional high-resolution multimedia document camera that delivers crystal clear SXGA resolution with a powerful 5.5x optical zoom lens. The PC190 Podium Camera features one-touch audio/video recording, playback, and live image annotation without a computer. From the lecture hall to the boardroom, the PC190 Podium Camera is designed to provide many years of reliable service with an unlimited 5 year REPLACEMENT warranty. Additional features include support for USB drives up to 64GB, live image masking, and integration with all interactive white boards.

Key Features:

- High-Resolution XGA, SXGA, and WXGA
- One-Touch Video/Audio Recording and Playback
- Built in Microphone
- 5.5x Optical Zoom, Manual Zoom
- 8x Digital Zoom
- Annotates without a computer
- Supports Wireless mouse devices
- Internal Memory for 120 JPEG Images
- USB Drives supports up to 32 GB
- Compatible with ALL Interactive Whiteboards (IWB)
- Time-Lapse Photography
- Automatic and Manual Slide Show
- 5 Year Unlimited REPLACEMENT Warranty - Lowest Total Cost of Ownership!
- FREE Training



For more information on Podium Cameras, scan bar code



Touchboards

205 Westwood Ave, Long Branch, NJ 07740 Phone: 866-94 BOARDS (26273) / (732)-222-1511 Fax: (732)-222-7088 | E-mail: sales@touchboards.com



www.PodiumCameras.com





Specifications

PC190

IMAGING

Full screen Video/audio recording and playback Output Resolution : XGA (1024 x 768), SXGA (1280 x 1024), WXGA (1280 x 800) Frame Rate : VGA - 30 fps; USB - 20 fps Zoom Capacity : 5.5x optical zoom and 8x digital zoom Capture Area : 18" x 12.5" (357.2 x 317.5 mm)

LIGHTING

Lamp Type : 2 lamps for completely even light coverage, (one in head) Light Box : Optional

INPUT/OUTPUT

Power Supply : Built-in, 100-240 VAC, auto switching VGA In : Active pass through from the computer VGA Out : VGA output to the projector Audio In : Built-in microphone Audio Out : 3.5mm phone jack for earphones or speakers Internal Memory Capacity : Up to 120 JPEG images External Memory Capacity : Support USB Drive USB Support : USB 2.0 High Speed (up to 480 Mbps) for seamless integration with interactive whiteboards RS-232 : Yes C-Video : RCA Jack (PAL, NTSC)

SOFTWARE

Podium View[™] Software Included : Support PC Windows 7, XP, Vista and Mac OSX (Free download from Lumens[™] website) Video Recording with Audio : Record video with various compression formats. Playback with audio out- No PC needed. Image Capture : Single or continuous capture of JPEG images Annotation : Add annotations directly to live image Controls and Operations : Same set of controls as the remote control USB Driver : Supports UVC, WIA and TWAIN for integration with interactive whiteboards including Promethean[™], SMART[™], Hitachi Starboard[™], Mimio[™], and others

ACCESSORIES

Standard : Power cable, VGA cable, USB cable, Microscope adapter (x 3), Audio Cable, Remote Control

Optional : Padded carrying case, light box, USB 2.0 high speed 15 foot extension cable, 25 foot Power cable, RS232 Adapter

OPERATION FUNCTIONS

Auto Tune : Yes, single button to adjust for best possible images Auto Exposure : Yes Auto White Balance : Yes Auto Focus : Yes Photo/Text Mode : Choose photo/grayscale/text mode Image Mode : Choose normal/35mm slide/microscope/negative film Image Capture : Single capturing of images to built-in memory, or to a computer via USB, or to a USB drive Video Recording : One-touch, Video recording with audio from built-in microphone and Playback Slide Show : Automatic or manual Pan Across the Screen : Enlarge any part of the image and pan by using the arrow keys Volume control : Yes, via remote or onscreen menu

SECURITY

Lock-Down Mode : Lock the unit with password entry Auto Erase Mode : Option to automatically erase internal memory during power down Anti-Theft : Kensington Lock Port on document camera chassis Bolt Holes on Bottom for Mounting : VESA standard 2.95" x 2.95"


OTHER

Weight : 5.0 lbs (2.3kg) Dimensions Operating : 11' x 6" x 11" (279 x 152.4x 279 mm) (L x W x H) Dimensions Folded : 7" x 6" x 11" (177.8 x 152.4x 279 mm) (L x W x H) Warranty : 5 year unlimited REPLACEMENT warranty covers all hardware including lamps

Express Replacement : Free advanced replacement program available

COMPLIANCE

Lumens[™] is in compliance with these important standards : FCC-EMI, cUL, CE-EMC, CE-LVD, RoHS, and WEEE.

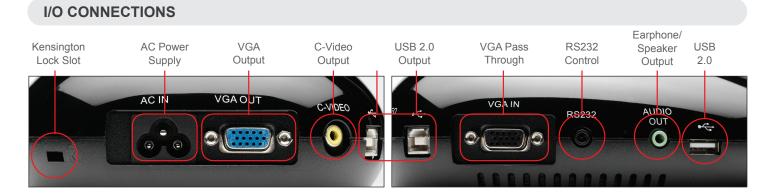



Lumens Integration, Inc. 4116 Clipper Court Fremont, CA. 94538 Phone : 615 530 7236 F a x : 510 252 1389 www.PodiumCameras.com

Lumens Europe BVBA Assesteenweg 65. 1740 Ternat, Belgium Phone : +32 (0)2 462 61 50 F a x : +32 (0)2 462 61 53 www.Lumenseu.com



© Copyright 2011 Lumens Integration, Inc. Lumens and Podium Cameras are trademarks of Lumens Integration, all rights reserved. Information listed in the data sheet may be subject to change without notice.