

HIGH CEILING AUDIO SOLUTIONS



Touchboards

205 Westwood Ave, Long Branch, NJ 07740
Phone: 866-94 BOARDS (26273) / (732)-222-1511
Fax: (732)-222-7088 | E-mail: sales@touchboards.com

NEW

MERCURY SPEAKER

Model M6720 / M6750

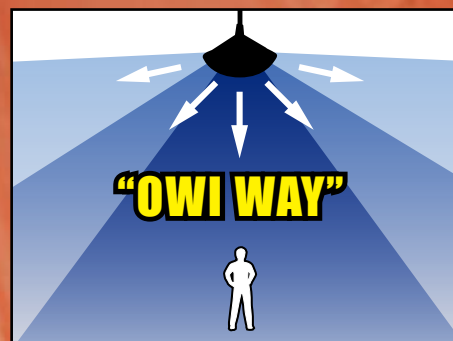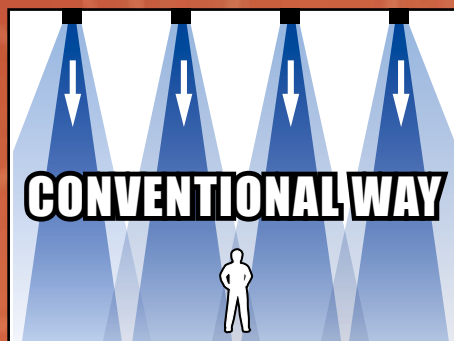

- Dynamic 360° Sound – 180° Dispersion
- 70 V and 8 Ohm Combination
- Ideal for Gyms, Restaurants, Churches, Hotels, Bars, Retail Stores, Malls
- More Dynamic Sound Out of One Speaker

- Quick and Easy Installation
- Fixed or Free Hanging
- Weatherized Casing, Grill & Bracket
- Available in Black or White
- 5 Year Warranty

OWI[®]
OWI Incorporated
Established 1978

NEW MERCURY SPEAKER

Model M6720/M6750

8 Ω and 70 V Combination

Engineered for High Ceilings in Gyms, Restaurants, Churches, Hotels, Bars, Retail Stores and Malls.



GENERAL SPECS	MERCURY (M6720)	MERCURY (M6750)	PVC Mounting Hardware	Optional Safety Cable
Description:	1 ea. 6.5" Polypropylene Woofer 4 ea. 2.5" Midrange 1 ea. 1" Tweeter 4 Bass Ports	1 ea. 6.5" Polypropylene Woofer 4 ea. 2.5" Midrange 1 ea. 1" Tweeter 4 Bass Ports		
Covered Outdoor:	Yes	Yes		
Impedance:	8 Ω and 70 V Combination	8 Ω and 70 V Combination		
Sensitivity (1W/1M):	90 dB	90 dB		
Max Power @ 8 Ω:	100 W	100 W		
Max Power:	20 W	50 W		
Nominal Power:	2.5, 5, 10, 20 W	20, 30, 40, 50 W		
Frequency Response:	65 Hz – 20 kHz	65 Hz – 20 kHz		
Crossover:	12 dB @ 4 kHz and 7 kHz (3-Way)	12 dB @ 4 kHz and 7 kHz (3-Way)		
Dispersion:	360° H x 180° V	360° H x 180° V		
Woofer Size:	6.5" – 1 Each	6.5" – 1 Each		
Woofer Material:	Polypropylene	Polypropylene		
Midrange Size:	2.5" – 4 Each	2.5" – 4 Each		
Midrange Material:	Paper	Paper		
Tweeter Size:	1"	1"		
Tweeter Material:	Silk	Silk		
Bass Ports:	4 Each	4 Each		
Enclosure:	Polyethylene	Polyethylene		
Grill Material:	Powder Coated Mesh Wire	Powder Coated Mesh Wire		
Dimensions:	15" Diameter x 10" Height	15" Diameter x 10" Height		
Net Weight (Unit Only):	8.2 Lbs.	9.5 Lbs.		
Total Weight:	12.3 Lbs.	13.6 Lbs.		
Color(s):	Black, White	Black, White		
Mounting Hardware:	1.2" Dia. x 18" PVC (Included)	1.2" Dia. x 18" PVC (Included)		
Mount Hardware Option:	Safety Cable (Not Included)	Safety Cable (Not Included)		
Paintable:	No	No		






Dynamic 360° Sound – 180° Dispersion

FREQUENCY RESPONSE CHART



Engineered in the USA • Made in the Philippines

POLAR CHARTS

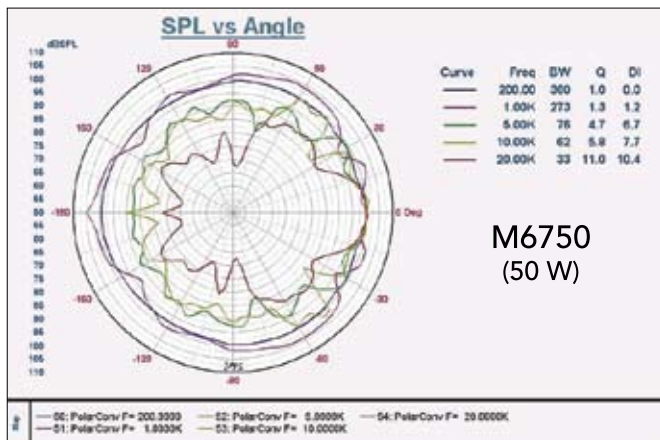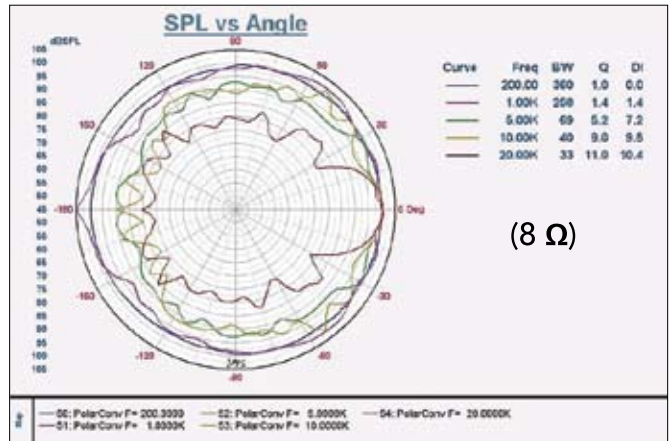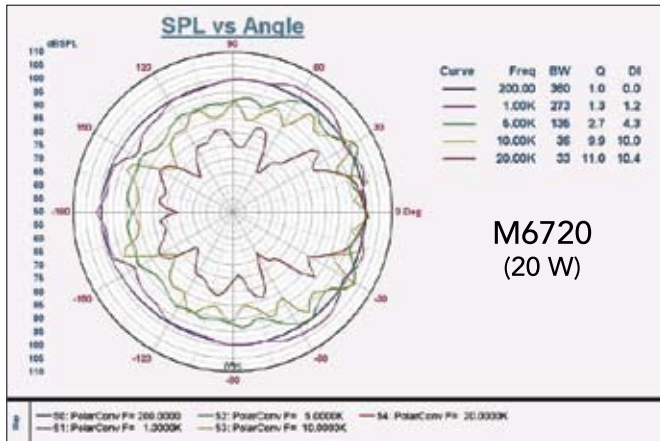

INSTALLATION GUIDE ±3 dB

Height of the Speaker (Ft.)	8'	9'	10'	11'	12'	13'	14'	15'	16'	17'	18'	19'	20'
Distance between Speakers (Ft.)	25	30	36	41	47	52	58	63	69	74	80	85	91
Coverage in Square Feet (Ft ²) per Speaker	491	707	1018	1320	1735	2124	2642	3117	3739	4301	5027	5675	6504

Shown above: figure for ±3 dB total variation installations
Speaker height is measured from the tweeter to the listener's ear height of 3' 6" from the floor



205 Westwood Ave, Long Branch, NJ 07740
Phone: 866-94 BOARDS (26273) / (732)-222-1511
Fax: (732)-222-7988 | E-mail: sales@touchboards.com