



MERCURY SPEAKER MOUNTING INSTRUCTION




1. Insert speaker wire thru holes of the pole mount and make sure you have enough to reach speaker terminal. Screw on gangbox or screw directly to ceiling.

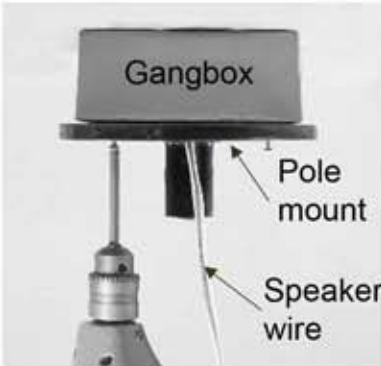

2. Tighten screws.

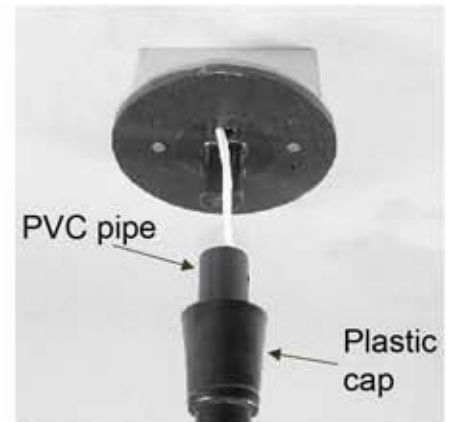


3. Put plastic cap thru top of the 1" PVC pipe. Run wire thru 1" PVC pipe.

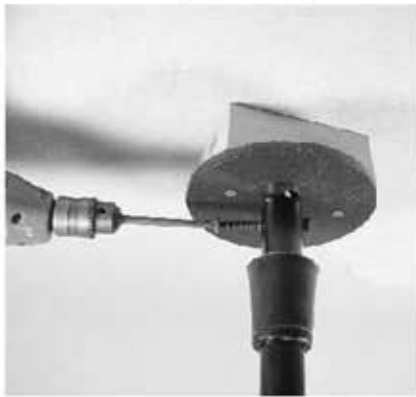

4. Insert bolt thru hole and put nut for security.



5. Slide plastic cap up to cover the bolt.

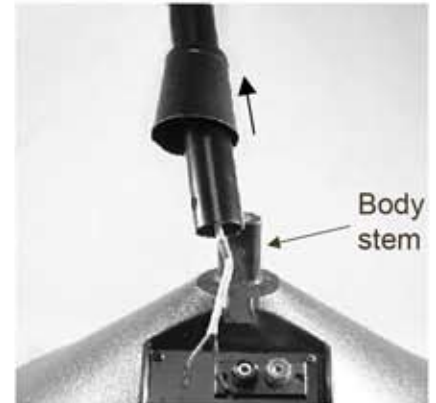

6. Slide second plastic cap up approx. 8" from bottom of the PVC pipe.



7. Insert pole over body stem of the Mercury speaker and put the bolt. Add nut for security. Connect speaker wire to the terminal.



8. Pull down the plastic cap to cover the bolt. Switch to the desired 70V or 8 ohms setting.



9. Speaker mounting is now complete.