

EP7150

Bright, Light & Brilliant



The Ideal Companion for the Road Warrior

Fully featured, ultra-portable and super-bright, the Optoma EP7150 is a brilliant and nimble multimedia data projector. With native XGA resolution, 2000 lumens and an express on/off function to power the projector on and off in seconds, the EP7150 delivers presentations vibrantly and quickly. The Optoma EP7150 is a road warrior's ultimate travel tool.

- Ultra-light **2.7-pound DLP®** projector
- Ultra-bright at **2000 lumens**
- Native **XGA (1024 x 768)** resolution
- Superb **2500:1 contrast ratio**
- **Express on/off function** to power on/off in mere seconds
- Auto-adjusting low noise **cooling fan speed settings** for higher altitudes
- **Fully featured remote** with laser pointer


 **Optoma**

www.OptomaUSA.com


Dimensions




Control Panel

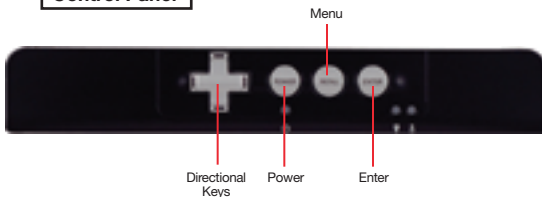

Remote Control

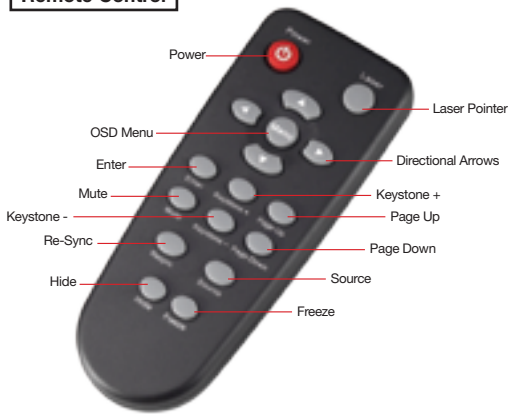

I/O Ports

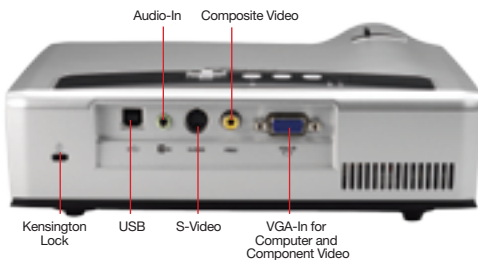

Specifications

Display Technology:	Single 0.55" DDR DMD DLP® Technology by Texas Instruments
Resolution:	XGA (1024 x 768)
Maximum Resolution:	UXGA (1600 x 1200)
Contrast Ratio:	2500:1 (Full On/Full Off)
Brightness (Typical):	2000 Lumens
Lamp Type:	200W P-VIP
Lamp Life (STD/ECO):	3000/4000 Hours
Aspect Ratio:	4:3 Native, 16:9 & 5:4 Compatible
Computer Compatibility:	UXGA, SXGA, XGA, SVGA, VGA; PC and Macintosh Compatible
Video Compatibility:	HDTV (1080i/p, 720p, 576i/p, 480i/p); NTSC (M, 3.58/4.43 MHz); PAL (B, D, G, H, I, M, N); SECAM (B, D, G, K, K1, L)
Projection Lens:	F=2.35~2.47, f=21.83~23.81 mm, 1.10X Manual Zoom Lens
Throw Ratio:	1.74 – 2.00:1 (Distance/Width)
Image Size (Diagonal):	34.67" to 254.22" (0.8 to 6.5 m)
Projection Distance:	3.9' to 39' (1.2 to 11.9 m)
Horizontal Scan Rate:	15 to 100 KHz
Vertical Scan Rate:	43 to 85Hz
Keystone Correction:	± 16° Vertical
I/O Connectors:	VGA, S-Video, Composite Video, USB, One IR Receiver, Audio-In
Noise Level (STD/ECO):	40dB/38dB
Audio:	One Internal 1-Watt Speaker
Weight:	2.7 lbs (1.2 kg)
Dimensions (W x H x D):	8.5" x 2.44" x 6.65" (216 x 62 x 169 mm)
Remote Control:	Fully Featured IR Remote with Laser Pointer
Power Supply:	100-240 Volts, 50 to 60 Hz
Power Consumption:	250 Watts, <10 Watts Standby Power
Operating Temperature:	5 to 35°C, 80% Max Humidity
Uniformity:	80%
Security:	One Kensington® Lock Port
Standard Accessories:	AC Power Cord, VGA to VGA Cable, Composite Video Cable, Remote Control, Batteries for Remote, Lens Cap, User's Manual, Quick Start Guide, Warranty Card and Carrying Case
Optional Accessories:	Bering™ Mediapod, VGA to Component Video Cable, GrayWolfil™ Series Screens, Extended Warranty and Gold Service Warranty
Warranty:	2 Years Limited Parts and Labor, 90 Days on Lamp
UPC:	796435 11 630 9



Available from:

Touchboards

205 Westwood Ave, Long Branch, NJ 07740
 Phone: 866-94 BOARDS (26273) / (732)-222-1511
 Fax: (732)-222-7088 | E-mail: sales@touchboards.com

