

快速指南

Quick Guide




©2011 RIGOL Technologies, Inc. All Rights Reserved.

DSA800 系列频谱分析仪

DSA800 Series Spectrum Analyzer

Remote Control Overview


DSA800 supports communication with PC via USB, LAN or GPIB (option) interface for remote control. The remote control is realized on the basis of SCPI (Standard Commands for Programmable Instruments) command set through two ways: user-defined programming and PC software (such as **RIGOL** Ultra Sigma).

When the instrument is in remote mode, the  icon is displayed in the user interface and the front panel keys (except **Esc**) are locked. At this point, you can press **Esc** to exit remote mode.

General Safety Summary

1. Use power cords designed for the instrument and authorized by local country.
2. Make sure the instrument is grounded properly.
3. Do not operate without covers.
4. Use proper fuse.
5. Avoid circuit or wire exposure.
6. Do not operate with suspected failures.
7. Keep proper ventilation.
8. Do not operate in wet conditions.
9. Do not operate in flammable and explosive environment.
10. Keep product surface clean and dry.
11. Protect the instrument from static electricity.
12. Pay attention to handling safety.

Start-up and Self-calibration

After connecting the instrument to power source correctly, press  at the front panel to start the spectrum analyzer. You can obtain information about the start-up initialization process through the start-up progress indications. Following the start-up screen, the sweep curve is displayed. Press **System** → **Calibrate** → **Cal Now** and the instrument will perform self-calibration (for more information, refer to the User's Guide).


Using Notices

1. To use the tracking generator output terminal:



CAUTION

To avoid damage to the tracking generator, the reverse power or voltage can not exceed 1 W or 50 V DC.



GEN OUTPUT 50Ω
MAX 50V DC




2. To use the RF input terminal:



CAUTION

To avoid damage to the instrument, for the signal input from the RF input terminal, the DC voltage component and the maximum continuous power of the AC (RF) signal component can not exceed 50 V and 20 dBm respectively.



RF INPUT 50Ω
MAX+20dBm/50V DC



To Adjust the Supporting Legs

Users can unfold the supporting legs to use them as stands to tilt the instrument upwards for easier operation and observation. Users can also fold the supporting legs when the instrument is not in use for easier storage or shipment.



Unfold the Supporting Legs



Fold the Supporting Legs

To Connect to Power

Connect the spectrum analyzer to AC power source using the power cord supplied with the accessories. DSA800 supports 100 V - 240 V, 45 Hz - 440 Hz AC power source and 250V AC, T2A fuse.




CAUTION

Make sure that the instrument is properly grounded to avoid electric shock.

Product Overview

DSA800 series spectrum analyzers which are small, light and cost-effective, are portable spectrum analyzers designed for starters. Its frequency range is from 9 kHz to 1.5 GHz. Configured with easy-to-operate keyboard, high-resolution color LCD display and various remote communication interfaces, they can be widely used in various fields, such as education, company research and development as well as industrial manufacture.

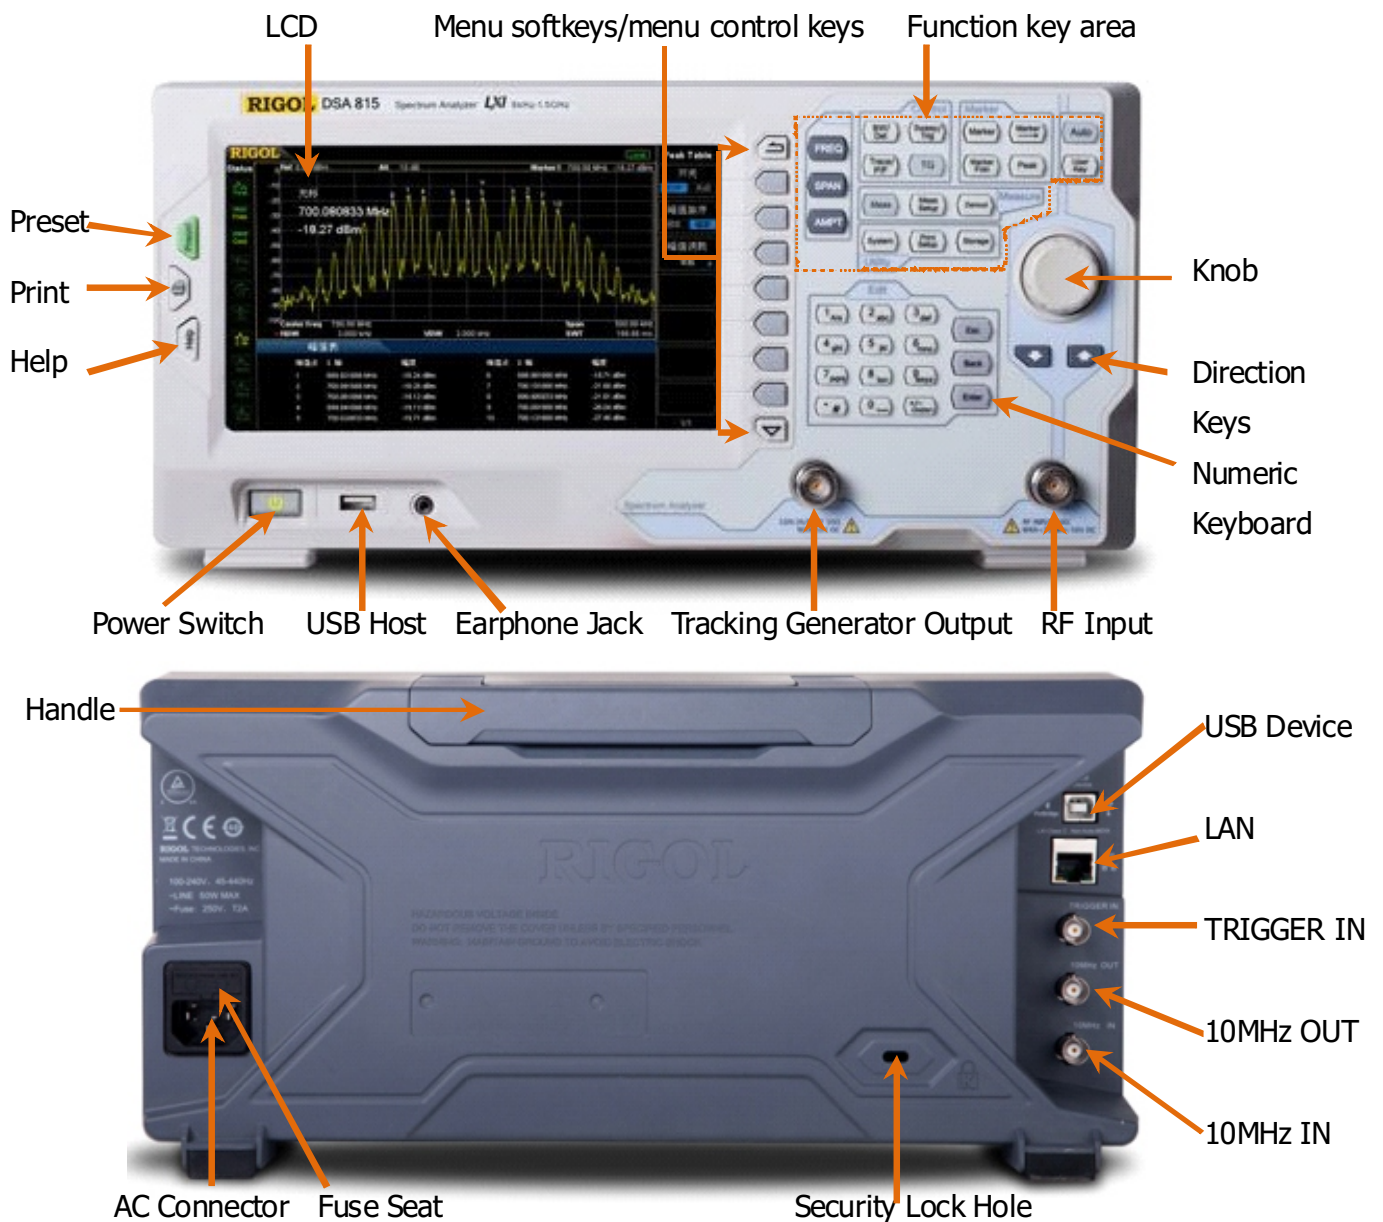

Instrument Demensions: Width×Height×Depth = 361.6 mm× 178.8 mm×128 mm

Weight: 9.4 lbs (with TG)

For More Product Information

You can obtain the instrument information including model, serial number as well as hardware and software version numbers through **System** → **Information** → **System Info**. You can also view the list of installed options through **System** → **License**.


For more information of this product, please refer to the following manuals (provided in the “CD” in the accessories; you can also download them from the **RIGOL** network):

User's Guide: provide detailed introductions of the functions of this product;

Programming Guide: provide detailed introductions of the SCPI commands and programming of this product;

Datasheet: provide the main characteristics and specifications of this product;

Accessories and Options: provide detailed introductions of the accessories and options of this product.

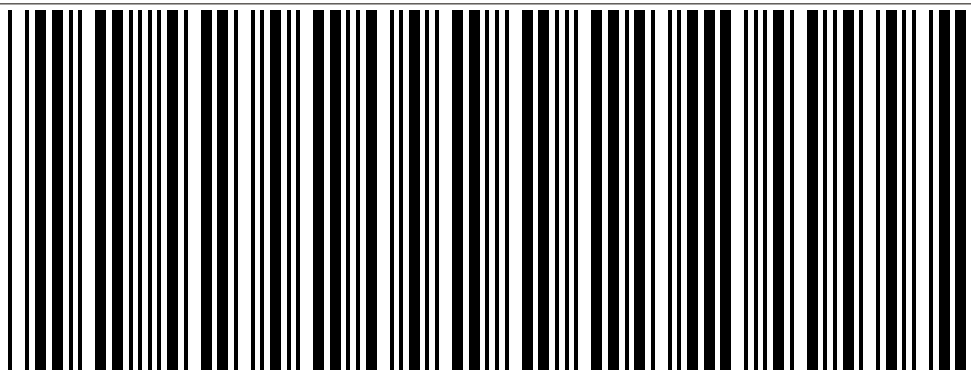

ZN1020001358