

SAMSUNG

SAMSUNG TECHWIN

Touchboards

205 Westwood Ave. Long Branch, NJ 07740  
Phone: 866-94-BOARDS(26273) / (732)-222-1511  
Fax: (732)-222-7088 | E-mail: sales@touchboards.com

High Definition  
Redefined



Samsung Digital Presenter

UF-130ST



- 1.32M Pixels PS CCD delivers superior image quality
- Unsurpassed 720HD output at 30fps
- Selectable resolution : 720P, SXGA, XGA
- Energy efficient, glare free LED lighting
- Supports DVI, VGA, USB 2.0 output

# Samsung Digital Presenter

## UF-130ST





### Specifications

UF-130ST	
<b>OPTICAL SYSTEM</b>	
Lens	F=1.5 (Wide) ~ 2.1 (Tele) f=4.8 ~ 67.2
Shooting Area	Max : 298 x 221mm, Min : 21.7 x 16.4mm
Zoom	Optical (14X), Digital (3X)
Focus	Auto focus / Manual
Iris	Auto (with fine level adjustment)
<b>ILLUMINATION SYSTEM</b>	
Upper	Power LED Illumination system
Lower	Light Box (Option)
<b>VIDEO</b>	
Pick-up Device	1/3" Progressive Scan CCD
Total Number of Pixels	1,348(H) x 976(V), 1.32M pixels
Number of Effective Pixels	1,296(H) x 966(V), 1.25M pixels
Frame Rate	SXGA : 22.5fps, HD (1,280 x 720p) : 30fps
VGA Output	SXGA (1,280 x 1,024), XGA (1,024 x 768), HD (1,280 x 720p)
White Balance	AWC (One-touch) / Manual
Image Freeze	Available
Image Rotation	Available (90°, 180°, 270°, 0°)
Preset Function	Up to 4 user settings
Input Selection	2 Channels (Internal : 1, External : 1)
<b>INTERFACE</b>	
Input Port	VGA In 15 pin DSUB Connector x 1
Output Port	VGA Out 15 pin DSUB Connector x 1
	DVI Out DVI-D type Connector x 1
I/F Port	RS-232C 9 pin DSUB Connector
	USB USB Slave B-type
Viewer Software	Software included for Windows XP/2000/Vista and Mac OS 10.5x
Power Port	Power Input DC +12V In x 1
	Power Output DC +12V Out x 1 (0.6A)
<b>GENERAL</b>	
Operating Temperature	+5°C ~ +35°C
Operating Humidity	30% ~ 90%
Power	12V DC (Adaptor input : 100V AC ~ 240V free voltage, 50/60Hz, output : 12V, 4A)
Dimensions	In-use : ø404(W) x 489(H) x 504(D)mm / ø15.91"(W) x 19.23"(H) x 19.84"(D) Storage : ø404(W) x 207(H) x 504(D)mm / ø15.91"(W) x 8.15"(H) x 19.84"(D)
Weight	5Kg (11.02 lb)
Accessories	Carrying bag, Remote controller, Cable, etc.



### Dimensions

Unit : mm (inch)


In-use



Storage



### System Configuration

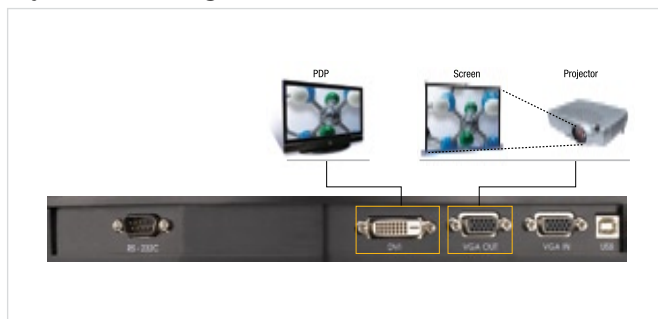

### Accessories

Light Box  
(Option)



SLB-80

Carrying Bag  
(Included)



Design and specifications are subject to change without notice.



The Eco mark represents Samsung Techwin's will to create environment-friendly products, and indicates that the product satisfies the EU RoHS Directive.



#### SAMSUNG TECHWIN CO., LTD.

145-3, Sangdaewon 1-dong, Jungwon-gu, Seongnam-si, Gyeonggi-do Korea 462-703  
Tel : +82-31-740-8160 Fax : +82-31-740-8145  
www.samsungpresenter.com

SAMSUNG TECHWIN AMERICA Inc.  
100 Challenger Road, #700 Ridgefield Park,  
NJ 07660, UNITED STATES  
Tel : +1-201-325-6920 Fax : +1-201-373-0124  
www.samsungpresenterusa.com

#### SAMSUNG TECHWIN EUROPE CO., LTD.

Samsung House, 1000 Hillwood Drive, Hillwood Business Park  
Chertsey, Surrey, UNITED KINGDOM KT16 0PS  
Tel : +44-1932-45-5300 Fax : +44-1932-45-5325

■ DISTRIBUTED BY



I.E-0901