

SAMSUNG

SAMSUNG DIGITall
everyone's invited™

*New Concept, Fresh Design !
Much Faster, More Convenient !
Crisp & Clear !*



Samsung Digital Presenter

UF-80DX/ST

- True XGA live images with 20fps Real-Time Motion
- Powerful 42X Zoom (14X Optical with 3X Digital Zoom)
- Supports USB Interface , DVI Output
- User-friendly Design, Easy Control with GUI
- Versatile Digital Functions (UF-80DX only)
 - : 8-Image store, Split screen and image shift, Image rotation




Touchboards

205 Westwood Ave. Long Branch, NJ 07740
866-94-BOARDS(26273) / (732)-222-1511
Fax: (732)-222-7088 | E-mail: sales@touchboards.com


Samsung Digital Presenter

UF-80DX/ST

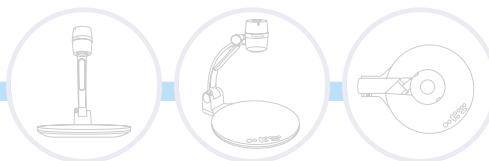

Item		UF-80DX	UF-80ST	
Optical system	Lens	F=1.5(Wide)-2.1(Tele) f=4.8-67.2, 14X power zoom		
	Shooting area	Max : 308 x 229.4mm, Min : 21.7 x 16.4mm		
	Zoom	Powered (14X), Digital (3X)		
	Focus	Powered (Auto Focus / Manual)		
	Iris	Auto (with fine level adjustment)		
Lighting system	Upper lamp	Cold-cathode Lamps		
	Lower lamp	Optical		
Video	Pick-up device	1/3" 850,000pixels Progressive Scan CCD		
	Effective pixels	1,034(H) X 779(V)		
	Frame rate	20 frames/sec		
	Sync. system	Internal sync.		
	VGA output	1024 x 768(XGA) RGB color.		
	White Balance	Manual / Auto (one touch type)		
	Freeze	Built-in		
	Input terminals	VGA : 1		
	Output terminals	VGA : 1, USB : 1, RS-232C : 1, DVI : 1		
	Remote controller	Supplied		
	GUI (Graphic User Interface)	Supplied		
	Input selection	2 channels (Internal : 1, External : 1)		
	On-screen display	Available		
	Image freeze	Available		
	Image save	Available (8frames)	Unavailable	
	Image recall	Available (8frames)	Unavailable	
	Image divide	Available (2divide of 9divide)	Unavailable	
	Image rotation	Available	Unavailable	
	Image transfer to computer	Available (USB : FULL, 1/4, 1/16, Mode)		
	PC connection	Preset function	Up to 4user settings	
USB		Built-in / USB 2.0		
RS-232C		SET control		
Application software		Viewer (for Windows 98, 98SE, ME, 2000 Professional, XP), TWAIN Driver (for windows)		
General	Operating temperature/ Humidity	+5°C ~ +35°C, 30% ~ 90%		
	Power	DC12V (Adaptor Input : AC100V-240V Free Voltage, 50/60Hz, Output : 12V, 3.5A)		
	Dimensions (mm)	In-use : 404(W) x 488(H) x 504(D) / Storage : 404(W) x 206(H) x 504(D)		
	Weight	5kg		
	Accessories	Carrying bag, Remote controller, Cables, etc.		

Dimension

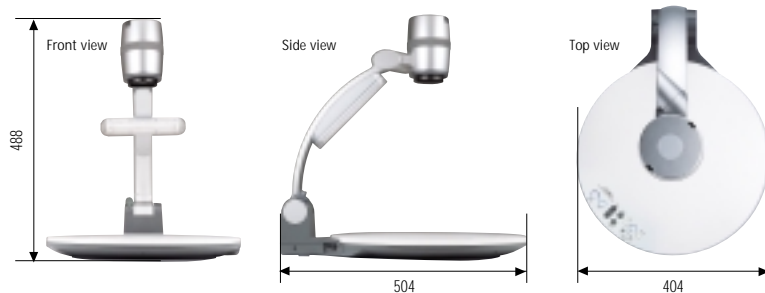

Optional Accessories



Light Box
SLB-80

www.samsungpresenter.com

Design and specifications are subject to change without notice.

SAMSUNG TECHWIN CO., LTD

145-3 Sangdaewon 1-Dong, Jungwon-Gu,
Sungnam, Kyungki-Do, Korea 462-121
TEL: +82-31-740-8137-8141 FAX: +82-31-740-8145

SAMSUNG OPTO-ELECTRONICS AMERICA, INC. ELECTRONIC IMAGING DIV.

40 Seaview Drive, Secaucus NJ 07094, U.S.A
TEL: +1-201-902-0347 FAX: +1-201-902-0429
Homepage: www.samsungpresenters.com

SAMSUNG TECHWIN MOSCOW OFFICE

LENNINGRADSKY PR-KT, 37-A. KORP.14
RUSSIA, 125167, MOSCOW
TEL: +7-095-258-9296, 9298 FAX: +7-095-258-9297


SAMSUNG OPTO-ELECTRONICS UK LTD.

Samsung House, 1000 Hillswood Drive
Hillswood Business Park Chertsey Surrey KT16 OPS
TEL: +44 (0)1932 455 308 FAX: +44 (0)1932 455 325

TIANJIN SAMSUNG OPTO-ELECTRONICS CO.,LTD

7 Pingchang Rd, Nankai Dist, Tianjin, P.R China
Post Code : 300190
TEL: +86-22-27614724 (33821) FAX: +86-22-27616514

■ DISTRIBUTED BY



info-EUN/04.10