



# Now...!

It's time to bring your presentation to life and let it captivate your audience.

## Samsung Digital Presenter **SDP-950DXA/STA**

- 1/3" progressive scan CCD (850,000 pixels)
- Vivid Live Images with 20fps Real Time Motion
- Faster Data Transfer with USB 2.0 PC Interface
- Various External Output Supports - 1 DVI & 2 VGA Support
- Convenient Digital Functions :  
image split, shift, image freeze & rotate,  
3x3 screen display and 8 pictures store
- Powerful 36X Magnification. (12X Optical & 3X Digital)
- Easy to Use GUI & Mouse-Controlled Annotation
- Compact & Light weight Design





## Samsung Digital Presenter **SDP-950DXA/STA**

| SPECIFICATION       | DESCRIPTION                      | SDP-950DXA                                                                                                                    | SDP-950STA  |
|---------------------|----------------------------------|-------------------------------------------------------------------------------------------------------------------------------|-------------|
| Optical system      | Lens                             | F=1.5(Wide) ~ 2.1(Tele) f=5.2~66.5, 12x power zoom                                                                            |             |
|                     | Shooting Area                    | Max : 299 x 244mm, Min : 21 x 16mm                                                                                            |             |
|                     | Zoom                             | Powered (12x), Digital (3X)                                                                                                   |             |
|                     | Focus                            | Powered (Auto Focus / Manual)                                                                                                 |             |
|                     | Iris                             | Auto (with fine level adjustment)                                                                                             |             |
| Illumination system | Upper                            | Attached to the side arm of the main unit                                                                                     |             |
|                     | Lower                            | Light box (built-in main unit)                                                                                                |             |
| Video               | Pick-up Device / Effective pixel | 1/3" 850,000 pixels PS CCD / 1034(H) x 779(V)                                                                                 |             |
|                     | Frame rate                       | 20 frame/sec                                                                                                                  |             |
|                     | Sync system                      | Internal sync.                                                                                                                |             |
|                     | VGA output                       | 1024 x 768(XGA) RGB color                                                                                                     |             |
|                     | Video output                     | C-Video VBS 1.0Vp-p / 75 $\Omega$ (unbalance)                                                                                 |             |
|                     |                                  | S-Video Y : 1.0Vp-p / 75 $\Omega$ (unbalance)                                                                                 |             |
|                     |                                  | C : 0.286Vp-p / 75 $\Omega$ (unbalance)                                                                                       |             |
|                     | White Balance                    | Manual / Auto (one touch type)                                                                                                |             |
|                     | Negative / Positive              | Selectable                                                                                                                    |             |
|                     | Freeze                           | built-in                                                                                                                      |             |
|                     | Input terminals                  | VGA : 2                                                                                                                       |             |
|                     | Output terminals                 | VIDEO : 1, VGA : 2, USB : 1, DVI : 1, RS-232C : 1, S-Video : 1, C-Video: 1                                                    |             |
|                     | NTSC / PAL                       | Selectable                                                                                                                    |             |
|                     | Remote controller                | Supplied                                                                                                                      |             |
|                     | GUI(Graphic User Interface)      | Supplied                                                                                                                      |             |
|                     | Input selection                  | 3 channels (Internal : 1, External: 2)                                                                                        |             |
|                     | On-screen display                | Available                                                                                                                     |             |
|                     | Image freeze                     | Available                                                                                                                     |             |
|                     | Image save                       | Available (8 frames)                                                                                                          | Unavailable |
|                     | Image recall                     | Available (8 frames)                                                                                                          | Unavailable |
|                     | Image divide                     | Available (2/9 divide)                                                                                                        | Unavailable |
|                     | Image rotation                   | Available (90°, 180°, 270°)                                                                                                   | Unavailable |
|                     | Image transfer to computer       | Available (USB : QUAR, HALF, FULL, SCREEN FULL)                                                                               |             |
| PC connection       | Preset function                  | Up to 4 user settings                                                                                                         |             |
|                     | USB                              | USB 1.1 / 2.0                                                                                                                 |             |
|                     | RS-232C                          | SET control                                                                                                                   |             |
|                     | Application software             | Viewer software: Windows 98 or higher / Mac OS 10.2 or higher<br>TWAIN Driver for Windows<br>AVI Capture software for Windows |             |
| General             | Operating temperature/Humidity   | +5°C ~ +35°C, 30% ~ 90%                                                                                                       |             |
|                     | Power                            | DC12V (Adaptor INPUT: AC100V~240V Free Voltage, 50/60Hz, OUTPUT: 12V, 4.0A)                                                   |             |
|                     | Dimensions                       | In-use : 25.6(W)" x 22.3(H)" x 16.0(D)" / Storage : 18.8(W)" x 6.0(H)" x 16.0(D)"                                             |             |
|                     | Weight                           | 10.6 lb                                                                                                                       |             |
|                     | Accessories                      | Suitcase (SDP-950DXA Only), Remote controller, Cables, etc.                                                                   |             |

### Rear Panel




### Option



**BAG-950**  
deluxe carrying case  
(included for SDP-950DXA)

### Dimension

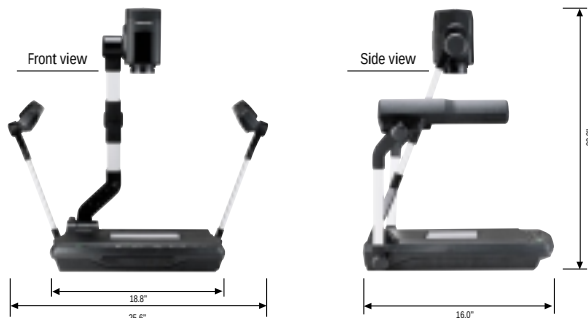

[www.samsungpresenter.com](http://www.samsungpresenter.com)



Design and specifications are subject to change without notice.

■ DISTRIBUTED BY



**SAMSUNG TECHWIN CO., LTD.**  
145-3, Sangdaewon 1-dong, Jungwon-gu,  
Seongnam-si, Gyeonggi-do 462-703, Korea  
Tel : +82-31-740-8137~8141 Fax : +82-31-740-8145



**205 Westwood Ave, Long Branch, NJ 07740**  
**Phone: 866-94 BOARDS (26273) / (732)-222-1511**  
**Fax: (732)-222-7088 | E-mail: [sales@touchboards.com](mailto:sales@touchboards.com)**