

# SFX-4P

4-PORT DVI-D & USB 2.0  
FIBER EXTENDER FAMILY

Crystal Clear  
Fiber Optic  
Digital Video



**4-Port DVI-D,  
USB 2.0, Audio  
and RS232 OVER  
FIVE FIBER OPTIC  
CABLES!**

## 4-Port DVI-D, USB 2.0, Audio and RS232 Fiber Extender

4-Port DVI-D and USB 2.0 Extender up to 1,500 feet over Fiber Optic Cable

The SFX-4P is a perfect solution for extending 4 DVI-D and USB 2.0 signals from a computer in a remote location up to 1,500 feet away. It supports high-resolution DVI-D video and all USB device types from high-speed web cams, hard drives, printers, scanners, audio devices, touch screens, digital cameras and game controllers. The SFX-4P is immune to electromagnetic interference, making it ideal for use in situations where there is considerable interference. The SFX-4P is also very secure because it's fiber optic signals cannot be easily tapped.

### FEATURES

- Top Signal Quality at Maximum Extension Over Multimode Fiber (1,500 ft.) Plug Type LC
- DVI-D Video Resolutions up to 1920 x 1200 WUXGA at 60Hz
- DDC Learning
- Supports USB 1.1 (12 Mbps) and USB 2.0 (480 Mbps) data rates
- Supports all USB device types transparently (no emulation) from high-speed web cams, hard drives, printers, scanners, audio devices, touch screens, game controllers and more
- Integrated Four-Port Hub in the receiver
- Compatible with all operating systems
- Extends Stereo Audio
- Extends RS-232
- Plug and play

### APPLICATIONS

- Medical Applications
- Industrial Work Areas
- Home Theater Integration
- Digital Signage Deployment
- Information Kiosks/Displays
- Film/Recording Studios




Made in the USA

# Touchboards

205 Westwood Ave, Long Branch, NJ 07740  
Phone: 866-94 BOARDS (26273) / (732)-222-1511  
Fax: (732)-222-7088 | E-mail: sales@touchboards.com

# SPECIFICATIONS

## APPLICATION DIAGRAM

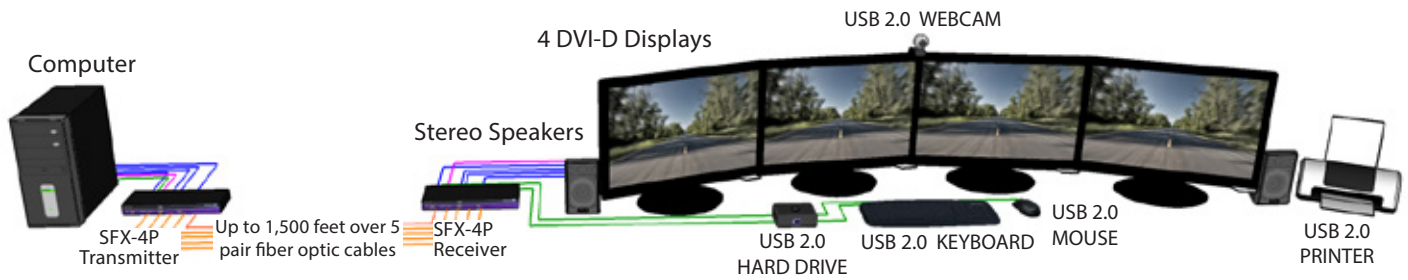

VIDEO	
Format	DVI-D Single Link
Maximum Pixel Clock	165 MHz
Input Interface (TX)	(4) DVI-D 29-pin female
Output Interface (RX)	(4) DVI-D 29-pin female
Resolution	Up to 1920 x 1200 @60Hz
DDC	5 volts p-p(TTL)
Input Equalization	Automatic
Input Cable Length	Up to 20 ft.
Output Cable Length	Up to 20 ft.
USB	
Signal Type	EHCI (USB 2.0) and OHCI/UHCI (USB 1.1)
Input Interface (TX)	(1) USB Type B (Female)
Output Interface (RX)	(4) USB Type A (Female)
AUDIO	
Signal Type	Stereo Audio
Bandwidth	15MHz, 0dB
Impedance	10K Ohm
Connector	3.5mm Stereo Mini Female
RS232	
Input Interface (TX)	DB9 Female
Output Interface (RX)	DB9 Male
Speed	Up to 115 Kbps
OTHER	
Power	Internal 100-240 VAC
Dimensions	17 in W x 1.70 in H x 7 in D
Weight	8 lb
Operating Temp.	0-55 °C (32-131°F)
Storage Temp.	-20-85 °C (-4-185 °F)
Humidity	Up to 95%

OPTICAL	
Fiber Type	Duplex, multi mode
Connector Type	Duplex LC
Wavelength	1310 nm/1550 nm (Dual wavelength)
Data Rate	2x2.5 Gbps (2.5 Gbps per single wavelength)
Transmission Power	-5 dB Min.
Receiver Sensitivity	-21 dB Max
Distance	500 m Max.
ORDERING INFORMATION	
Part No.	Description
SFX-4P-M-S	4 DVI-D + USB2.0 + Audio + RS232 Extender. Includes: [SFX-4P-TX, SFX-4P-RX, 2 X (CCPWR06USA)]

Many leading companies have recognized and embraced the innovation of SmartAVI's technologies and have successfully incorporated them into their organizations. Clients of SmartAVI include:

