



The TouchIT Board


TOMORROW'S TOUCH-BASED TECHNOLOGY, TODAY...

TouchIT Board

- Touch-based Interactive Whiteboard
- Available in 78", 80" & 90"
- Surface is durable P3 enamelled steel from Steelcase with a lifetime warranty
- Use dry-erase markers on the surface when it is not being used with a projector
- Powered by USB, no power supply required.
- Touch sensitive - no need for any special pens or stylus.
- Supplied with two pieces of software - Wizteach educational content and TouchIT Transcribe control and annotation software
- Control PowerPoint slides, Word documents and Excel spreadsheets.
- Browse websites on the Internet. Annotate, mark-up, and edit documents directly at the board



Dimensions

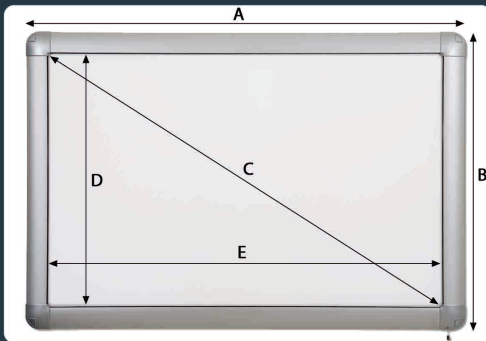

	E	D	C	A	B
50"	1150mm	657mm	1324mm	1350mm	857mm
78"	1724mm	985mm	1985mm	1924mm	1185mm
80"	1642mm	1176mm	2020mm	1842mm	1376mm
90"	1970mm	1150mm	2281mm	2170mm	1350mm

USA

	E	D	C	A	B
50"	3' 9" 1/4	2' 3" 1/16	4' 4" 1/8	4' 5" 1/8	2' 9" 3/4
78"	5' 8" 1/4	3' 2" 3/4	6' 6" 1/8	6' 3" 3/4	3' 10" 3/4
80"	5' 4" 3/4	3' 10" 2/8	7' 2" 5/8	6' 1/2"	4' 6" 1/8
90"	6' 5" 1/4	3' 9" 1/4	7' 5" 3/4	7' 1" 1/2	4' 5" 1/4

Specifications

Detection Form	Infrared rays
Resolution	4096 x 4096
(Non-physical)	USB 2.0
Interface Type	450mm
Cable Length	2 Years (limited) hardware
Warranty	30 years board surface
Working Environment	Not affected by sunlight
Scan Periods	45-70Hz
Power Supply	From USB

Temperature Range

Operating -30 to 80C
(temperature slope less than 25C/Hr)

Storage -30 to 85C
(temperature slope less than 25C/Hr)

Humidity

Operating 0-85%
(non condensing)

Storage 0-95%
(non condensing)

ESD Capacity

Contact voltage discharge is 4KV
Air discharge is 8KV