AVerVision® CP355

Interactive Visualizer

Better than Real

- 3.2-Megapixel image clarity and HD 720p output resolution
- 80X total zoom including 10X AVer® Optical zoom
- Wide shooting area to display A4 portrait documents
- Laser positioning guide for intuitive object placement
- All-new versatile AVer+ software

Optical Zoom

Product Specifications & Features

Image / Video	
Image Sensor	1/2.5" CMOS Color Image Sensor
Total Pixels	3.2M Pixels
Output Resolution	HD 720p (1280 x 720)
Lens	F 3.2 (Wide), F 6.8 (Tele)
Zoom	80X Total Zoom (10X AVer® Optical Zoom + 8X Digital Zoom)
Frame Rate	24fps (Max.)
Focus	Auto / Manual
Shooting Area	400 x 300mm (Max.)

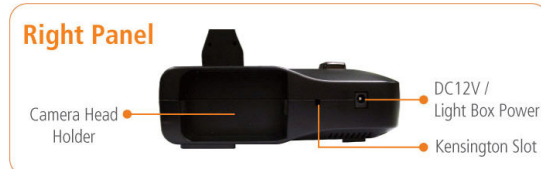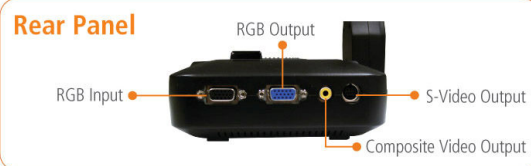| Functions	
Image Rotation	Camera Head 0° / 90° / -90°
Internal Storage	Built-in Memory (Max: 80; up to 3M each)
On-Screen Display (OSD)	Provided
Image Effects	Color / B&W / Negative / Mirror / Reverse / Freeze
Image Adjust. (White Balance / Exposure / Night View)	Auto / Manual
AVerPresenter	Provided (AVerBox & AVerVisor)
Split Screen	Provided (Vertical & Horizontal)
Picture-in-Picture	Provided
Display Mode	Text / Graphics / High Frame / Wide Angle / Macro / Infinite / Microscope
Capture Mode	Single / Continuous
User Profiles	Up to 3
Timer	Provided
Flicker Filter Control	Provided (2 Levels)
Remote Control	Provided (with Laser Pointer)

Connectivity	
DVI-I Output	Provided
RGB Input	Provided (15-Pins D-Sub, Pass Through)
RGB Output	Provided (15-Pins D-Sub, Pass Through)
S-Video & Composite Video Output	Provided (NTSC or PAL)
RS-232 Port	Provided (with S-Video / RS-232 Adapter cable)
USB 2.0 Port	Provided (PC Camera / Built-in Image Download)
Lighting	
Light Source	Embedded LED Lamp
Laser Positioning Guide	Provided
Others	
Dimension	Operating: 430mm x 180mm x 600mm Folded: 355mm x 245mm x 63mm
Net Weight	2.6kg (5.73lbs)
Power Consumption	20W (Max.)
Certifications	FCC, CE
Package Content	
AVerVision® CP355 Unit	Remote Control with Batteries
AVer+ Software CD	User Manual CD
Power Adapter	Quick Guide
RGB Cable	Anti-Glare Sheet
USB Cable	Warranty Card
S-Video / RS-232 Adapter Cable	Carrying Bag
Panel	

Rear Panel — RGB Output, RGB Input, S-Video Output, Composite Video Output

Right Panel — Camera Head Holder, DC12V / Light Box Power, Kensington Slot

Left Panel — TV-RGB Switch, DVI-I Output, USB

Patent No.: Japan 3122844, Taiwan 1276904

Product Datasheet

Optional Accessories	

Microscope Adapter

Light Box

Security Bracket

All-New AVer+ Software

AVer+ software offers a brand new user interface that allows you to draw and make notes on top of images, record video and audio, set up a multiple-user network, and much more.

System Requirements

For PC

Windows XP

- ☐ Intel Pentium III 1 GHz or later x86 processor (Intel Core 2 Duo 1.66GHz recommended)
- ☐ 512 MB of RAM (1 GB recommended)
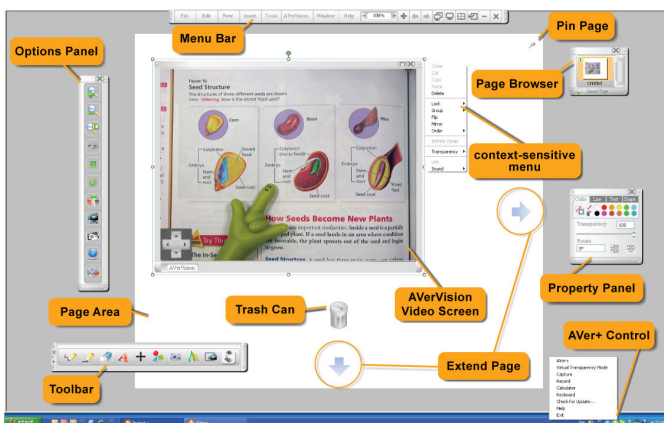- ☐ 100 MB free hard disk space for basic installation (without content in Gallery)

Windows Vista

- ☐ Intel Core Duo 1.5 GHz or later x86 processor (Intel Core 2 Duo 1.66GHz recommended)
- ☐ 1 GB of RAM (2 GB recommended)
- ☐ 100 MB free hard disk space for basic installation (without content in Gallery)

For Mac

Mac OS X 10.4 and later

- ☐ 1GHz G4 processor or Intel Core Duo 1.83 GHz or later x86 processor (Intel Core 2 Duo 2.0 GHz recommended)
- ☐ 1 GB of RAM (2 GB recommended)
- ☐ 100 MB free hard disk space for basic installation (without content in Gallery)

Patent No.: Japan 3122844, Taiwan 1276904