




205 Westwood Ave, Long Branch, NJ 07740
 Phone: 866-94 BOARDS (26273) / (732)-222-1511 | Fax: (732)-222-7088
 E-mail: sales@touchboards.com | Site: www.touchboards.com

Model	MPWX70E
Technology	.74" 3LCD 
Brightness	4200 lumens (standard); 3200 lumens (economy mode)
Native Resolution	1280 x 800 (WXGA)
Supported Resolution	1600 x 1200 (UXGA)
Colors	16.7 Million
Brightness Uniformity	85%
Projection Methods	Desktop front/rear; Ceiling front/rear
Contrast Ratio	500:1
Aspect Ratio	Native 16:10; Compatible 4:3
Image Size	40" to 300"
Projection Distance	4' to 30'
Lens	Manual Zoom and Focus
Keystone Correction	Vertical +/- 30 degrees Manual and Auto
Horizontal Scan Rate	35~107kHz
Vertical Scan Rate	50~120Hz
Audio Output	1 x 8W mono speaker
Lamp	275W
Lamp Life	2000/3000 (standard/economy)
Remote Control	Full Function IR remote with laser pointer
Noise Level	40dB standard; 35dB economy mode
Power Supply	AC Input 100-240V, Auto 50/60Hz
Power Consumption	430W < 5W in Standby mode
Computer Compatibility	UXGA, WXGA, SXGA+, SXGA, XGA, SVGA, VGA Resized; VESA Standards; PC and Macintosh Compatible
Video Compatibility	EDTV (480p), HDTV (720p, 1080i), NTSC/NTSC 4.43, PAL B/G/H/I/M/N 60, SECAM
Connectivity	Component (RCA x3) DVI-I, VGA-in, Composite Video, S-Video, RCA Stereo Audio-In (x2), Mini-Jack Audio-In (x2), VGA-Out, Mini-Jack Audio-Out
Service and Network Control	RS232X, RJ45, USB mouse Control
Weight	16.5 lbs
Dimensions (W x H x D)	18.9" x 14.2" x 5.7" inches (480 x 361 x 145 mm)
Operating Temperature	N/A
Standard Accessories	AC power cord, VGA cable, USB cable Remote Control with batteries, User manual (cd)
Optional Accessories	Replacement remote control. Harsh Environment Filter Component Video cable, DVI-D cable, Ceiling Mount, S-Video Cable


LENS INFORMATION

Standard Lens	1.5-1.8 standard lens
Zoom Ratio	1.2
F=	1.7-1.9
f=	24~28.8




Key Features

- Five auto features (Auto Search, Auto Sync, Auto Ceiling, Auto Keystone and Auto Filter Alert)
- 4200 Lumens
- Robust input panel
- Optional harsh environment filter
- RJ45 Network ready
- Side changing lamp and filter

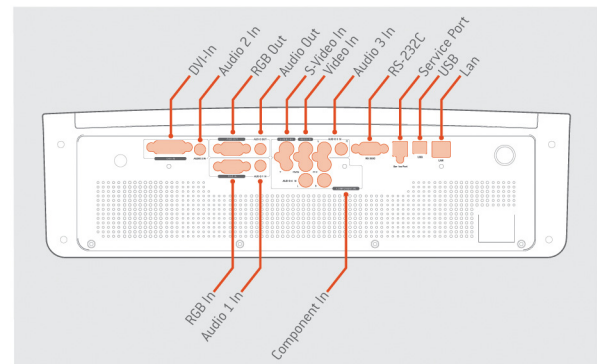

Throw Distance (ft)

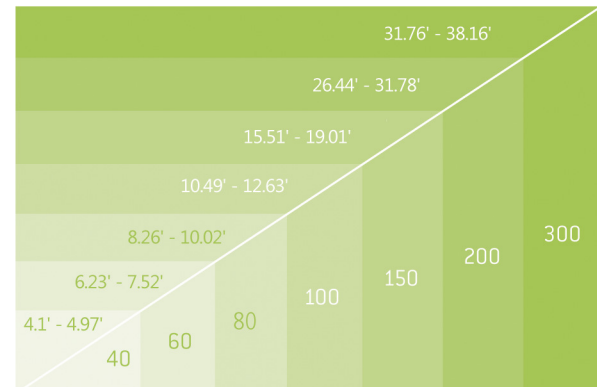

Diagonal Image Size (inches)

Outstanding Technical Support 24/7/365

And, of course, all **BOXLIGHT** products all come with free lifetime technical support. Speak with a hands-on, in-house, ISF Certified® technician ready to service your projector should the need arise.