




A-key to better communications.

EIP-3000N

XGA

Ultraportable DLP® Projector

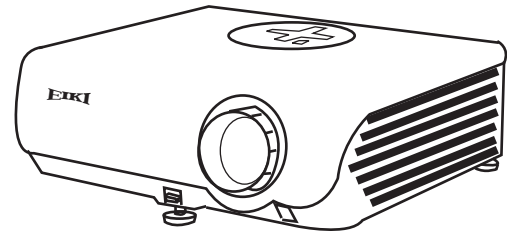

EIP-3000N

KEY FEATURES: Model EIP-3000N

3000 ANSI Lumens, 85% uniformity, and 2000:1 contrast ratio.
DLP® imaging technology delivers a "seamless" high contrast image.
XGA resolution. SXGA+, SXGA, XGA, SVGA, VGA & MAC compatible.
Built-in Network Connectivity, ready for use: just connect.
Smart data compression / expansion, and video scaling.
Convenient manual zoom and focus lens.
Preset image offset. Automatic vertical digital keystone correction.
Settings for Standard, Presentation, Movie, Game, and sRGB operation.
Accepts Composite, S, and Component Video in all major standards.
Displays both Regular 4:3 and Widescreen 16:9 ratio video formats.
Supports most HDTV resolutions up to 1080i.
Sealed Optics. No air filter to maintain.
Extremely quiet: operating noise only 30 dBA in eco mode.
System Lock function. Keylock function. Wireless remote control.
Menu Driven Help System. Power Management function. Wireless remote control.
3 Year* Projector Warranty!

Included Accessories: Owner's manual. Setup Guide CD. System Lock Caution. Quick guide. AC Power Cord. Lens Cover. VGA-type Computer Input Cable (HD15~HD15). Wireless Remote Control & Batteries (AA x 2). Component Video Input Cable (HD15~3-RCA) RS-232 Control Adapter (DB9~9-Pin DIN)

Optional Accessories: Replacement Lamp. Ceiling Mount. Ceiling Post and Plate. Additional VGA-type Computer Input Cable (HD15 ~ HD15). Additional Component Video Input Cable (HD15~3-RCA). EZ-250 Local Control.

SPECIFICATIONS: Model EIP-3000N

Screen Brightness	Standard, 3,000 / Eco 2,400 ANSI Lumens	Video: Resolutions Supported	
Illumination Uniformity	85%	SDTV	480i, 540p, 576i
Size of Color Palette	16.7 Million	EDTV	480p, 576p
Contrast Ratio	2000:1 (Full ON/OFF)	HDTV	720p (50/60), 1035i (50/60), 1080i (50/60)
Horizontal Resolution	600 TV Lines (DTV 720p)	Signal Inputs:	
Projection Lamp	300 Watt SHP	1. Computer / Component (with breakout cable)	HD15 x 1
Estimated Lamp Life	Up to 1500 hrs. in Standard, 3000 hrs. in Eco	2. Computer / Component (with breakout cable)	HD15 x 1
Imaging System	0.55 in. DDR XGA DMD™	plus Audio shared - inputs 1 & 2	Stereo: MiniStereo x 1
Color System	4-Segment, 3X speed color wheel	3. S-Video	S-Video x 1
Screen Pixels	(1024x768) in stripe configuration	4. Composite	RCA x 1
Total Pixels	786,432	plus Audio shared - inputs 3 & 4	Stereo: RCA x 2 (L&R)
Lens Type	Manual Zoom and Focus	Signal Outputs:	
Lens Specs	Speed: f:2.4~2.6; FL: 0.74~0.85 in. (18.7~21.5 mm)	Computer / Component (shared input 1 & 2)	HD15 x 1
Lens Ratios	Zoom Range: 1.15:1; Throw: Width: 1.72~1.99:1	plus Audio: (shared - inputs 1 ~ 4)	Stereo: MiniStereo x 1 (variable)
Image Diagonal	40~300 in. (102~762 cm)	Audio: Amplifier	Mono: 2 Watt
Image Width	2.67~20 ft. (0.81~6.1m.)	Audio: Built In Speakers	1.6 x 1.1 in. (4 x 2.85 cm) oval x 1
Throw Distance	4.6~39.8 ft. (1.4~12.2 m.)	Operating Noise	37 dBA Standard / 30 dBA in Eco mode
Front Elevation / Maximum Tilt	up to 8° up	Cabinet Size (HxWxD)	4.3 x 12.4 x 11.0 in. (109 x 315 x 280 mm.)
Anti Keystone	Fixed Image Offset 110.5% of Image Height, up	Overall Size (HxWxD)	4.7 x 12.4 x 11.6 in. (120 x 315 x 295 mm.)
Vertical Keystone Correction	Digital: up to 13° up or down	Weight	8.6 lbs. (3.9 kg)
Scanning Frequency	Auto: H Sync. 15-70 kHz; V Sync. 45-85 Hz	Packaged Size	10.7 x 17.4 x 18.1 in. (272 x 441 x 459 mm)
Dot Clock	12~108 MHz	Packaged Weight	16.3 lbs. (7.4 kg)
Image Orientation	Normal, Reversed, Inverted	Power Requirements	100-240V AC, 50/60Hz
Local Control / Power Management	Full Function / Auto Shut-Off	Power Consumption / Heat	385 W / 1314 BTU/hr / (331 Kcal/hr)
Remote Projector Control	Wireless (Infra Red) x 1	Power Consumption / Heat - Eco	308 W / 1051 BTU/hr / (265 Kcal/hr)
RS-232 Control Port	Mini DIN 9 Pin x 1	Power Cord	6' (1.8M) Type 3, Detachable
LAN Port	RJ45 x 1	Safety Compliance	UL / CSA / CE
Computer Native Resolution	1024 x 768 (XGA)	Security Facilities	Kensington® Security Slot
Computer: Compatibility	SXGA+, SXGA, XGA, SVGA, VGA & MAC 13 ~ 21	Operating Temperature	41~95°F (5~35°C)
Computer: Formats	1400x1050 through 640 x 480	User Maintenance	Clean Air Intake, Replace Lamp
Computer: Image Sizing	Normal, or Smart Compressed or Expanded	Warranty: (to the original end-use customer)	
Video: Color Systems	NTSC / PAL / SECAM / NTSC 4.43 / PAL-M&N	Projector:	3 Yr. / 6000 Hr. *(Parts & Labor to Correct Defects)
Video: Aspect Ratios Supported	4:3 and 16:9	Lamp: 90 Days / 500 Hours Use* (Failed Lamp Replaced Pro-Rata)	
Video: Image Sizing	Video Scaling Technology		* Whichever occurs first

EIP-3000N Breakthrough Features

1. Built-in RJ45 LAN connection and web server permits projector monitoring and control over the network using a web browser.
2. High brightness (3000 AL) and contrast (2000:1) in Standard mode
3. Quiet operation (30 dBA) and long lamp life (>3000 hr.) in Eco mode.

Lamp contains Mercury. Do not put in trash. Dispose of as Hazardous Waste, according to Local, State or Federal Laws.



205 Westwood Ave, Long Branch, NJ 07740
Phone: 866-94 BOARDS (26273) / (732)-222-1511
Fax: (732)-222-7088 | E-mail: sales@touchboards.com