



Â-key to better communications.

# LC-XB15

## KEY FEATURES: Model LC-XB15


Economical: estimated lamp life 2500 hours. Quiet: only 37 dBA.  
 1700 ANSI Lumens, 85% uniformity, and 350:1 contrast ratio.  
 Native XGA resolution. SXGA, XGA, SVGA, and VGA compatible.  
 Weighs about 6 lbs! Footprint about the same as a sheet of paper!  
 3 panel LCD imaging delivers a rich, color saturated picture.  
 Smart data compression / expansion, and video scaling.  
 Convenient wide range (1.5:1) manual zoom and focus lens.  
 Preset image offset. Vertical and Horizontal digital keystone correction.  
 Accepts Composite, S, and Component Video in all major standards.  
 Displays both Regular 4:3 and Widescreen 16:9 ratio video formats.  
 Supports all HDTV resolutions. Converts Interlace to Progressive scan.  
 Variable Power Management option. Optional local or remote keylock.  
 DVI is HDCP compatible. Slideshow Page Up/Down on remote control.  
 Custom warm-up screen image option. Factory defaults reset.  
 Wireless remote with mouse and Laser pointer. 7X digital zoom.  
 3 Year\* Projector Warranty!

**Included Accessories:** Owner's Manual. AC Power Cord. Lens Cover. VGA type Computer Input Cable (HD15 ~ DVI-I).

Wireless Remote Control With Mouse and Laser Pointer & Batteries (AA x 2). Mouse cable for computer USB Port. Soft Carry Bag.

**Optional Accessories:** Replacement Lamp. Component Video Input Cable (HD15~3-RCA). MAC Adapter. MAC Monitor Cable. 9 Pin Serial cable for RS-232 communications. Executive Carry Case with Computer Compartment. Luggage-Style ("wheelie") Carrying Case with Wheels, Telescoping Handle, and Detachable Computer Compartment. ATA-Style Shipping Case with Wheels and Telescoping Handle. Ceiling Mount. Ceiling Post and Plate. 33' (10m) Extension Cable for Serial Cable. Multi Card Director system supports 1. Computerless Slide Show System. 2. Wired Network Projector Control. 3. Wi-Fi Content Delivery and Projector Control System. EZtrol Local Control. NPC-1 Network Control.

## XGA "Brilliant" Series

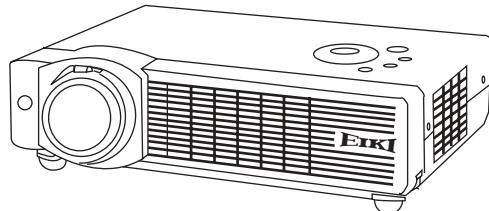

LC-XB15

## SPECIFICATIONS: Model LC-XB15

|                                  |   |  |  |
|----------------------------------|---|--|--|
| Screen Brightness                | 1700 ANSI Lumens                                | Computer: Lower Resolution                               | Displayed normal or Smart Expanded                   |
| Illumination Uniformity          | 85%   | Video: Compatibility                                     | NTSC / PAL / SECAM / NTSC 4.43 / PAL-M&N             |
| Size of Color Palette            | 16.7 Million                                    | Video: HD Compatibility                                  | 480i/p, 575i/p, 720p, 1035i, 1080i                   |
| Contrast Ratio                   | 350:1 (Full ON/OFF)                             | Video: Formats Supported                                 | Normal 4:3 and Wide Screen 16:9                      |
| Horizontal Resolution            | 800 TV Lines                                    | Video: Image Sizing                                      | Video Scaling Technology                             |
| Projection Lamp                  | 200 Watt UHP operating at 185 Watt              | Image Signal Inputs                                      |  |
| Estimated Lamp Life              | 2500 Hours                                      | * Computer In 1:   | DVI-I x 1 (HD15 via supplied Input Cable)            |
| Imaging System                   | 0.79" PolySilicon active matrix TFT Panels x 3  | * Computer: In 2:/ Component In / Computer Monitor out : | HD15 x 1   |
| Screen Pixels                    | 1024 x 768 in stripe configuration              | * Video In :   | RCA x 1 (Composite) S-Video x 1 (Y/C)                |
| Total Pixels                     | 2,359,296 ((1024 x 768 ) x 3)                   | Audio Signal Inputs                                      |  |
| Lens Type                        | Manual Zoom and Focus                           | * Computer 1 & 2 / Component                             | Stereo: Ministereo x 1                               |
| Lens Specs                       | Speed: f:1.7~2.5; FL: .787~1.181 in. (20~30 mm) | * Composite/S-Video                                      | RCA x 2 (L & R)                                      |
| Lens Ratios                      | Zoom Max:Min: 1.5:1; Throw:Width: 1.25~1.87:1   | Audio: Amplifier   | Mono: 1 Watt RMS                                     |
| Image Diagonal                   | 40~300 in. (102~762 cm)                         | Audio: Built In Speakers                                 | 1.1 in. (2.8 cm) x 1                                 |
| Image Width                      | 2.67~20 ft. (0.64~6.1 m.)                       | Audio: Output  | Stereo: Ministereo x 1 (Variable)                    |
| Throw Distance                   | 3.3~25.3 ft. (1.0~7.7 m.)                       | Fan Noise  | 37 dBA   |
| Front Elevation / Maximum Tilt   | up to 11.8° up / +/- 90°                        | Cabinet Size** (HxWxD)                                   | 2.8 x 11.73 x 8.58in. (71 x 298 x 218mm.)            |
| Anti Keystone                    | Fixed Image Offset, Ratio (Top:Bottom) 9:1      |  | ** excluding legs and lens                           |
| Vertical Keystone Correction     | Digital: up to 40° up or down                   | Weight   | 6.2 lbs. (2.8 kg)                                    |
| Horizontal Keystone Correction   | Digital: up to 20° left or right                | Packaged Size (H x W x D)                                | 13.4 x16.6 x14.4in. (340 x 420 x 365mm.)             |
| Scanning Frequency               | Auto: H Sync. 15-100kHz; V Sync. 50-100Hz       | Packaged Weight  | 13.9 lb (6.3 kg)                                     |
| Dot Clock                        | 140 MHz   | Power Requirements                                       | 100-240V AC, 50/60Hz                                 |
| Image Orientation                | Normal, Reversed, Inverted                      | Power Consumption / Heat                                 | 258 W /881 BTU/hr (222 Kcal/hr)                      |
| Local Control / Power Management | Full Function / Auto Shut-Off                   | Power Cord   | 10' (3M) Type 3, Detachable                          |
| Remote Proj & Mouse Ctrl         | Wireless (Infra Red) with Laser Pointer x 1     | Safety Compliance  | UL Listed  |
| Mouse Port                       | USB x 1   | Security Facilities                                      | Kensington® Security Slot                            |
| Service Port                     | Mini DIN 8 Pin x 1                              | Operating Temperature                                    | 41~95°F (5~35°C)                                     |
| Computer Native Resolution       | 1024 x 768 (XGA)                                | User Maintenance   | Clean Air Filter, Replace Lamp                       |
| Computer: Compatibility          | SXGA, XGA, SVGA, VGA                            | Warranty: Projector                                      | 3 Yr. / 6000 Hr. *(Parts & Labor to Correct Defects) |
| Computer: Formats                | 1280 x 1024, 1024x768, 800x600, 640x480         | Warranty: Lamp   | 90 Days (Failed Lamp Replaced Pro-Rata               |
| Computer: Higher Resolutions     | Displayed panned or Smart Compressed            |  | * Whichever occurs first                             |

**Caution! Laser Radiation – Do not stare into beam. Max. Output: 1 mW. Wave Length: 650 +/- 20 nm. Class II Laser Product.**

Lamp contains Mercury. Do not put in trash. Dispose of as Hazardous Waste, according to Local, State or Federal Laws.

Specifications subject to change without notice. ©2003 Eiki International, Inc. Issued December 10, 2003.



205 Westwood Ave, Long Branch, NJ 07740  
 Phone: 866-94 BOARDS (26273) / (732)-222-1511  
 Fax: (732)-222-7088 | E-mail: sales@touchboards.com