



Ä-key to better communications.

LC-XB30

KEY FEATURES: Model LC-XB30

Weighs about 6 lbs! Footprint about the same as a sheet of paper!
 3000 ANSI Lumens, 85% uniformity, and 450:1 contrast ratio.
 3 panel LCD imaging delivers a rich, color saturated picture.
 True XGA resolution. SXGA, XGA, SVGA, and VGA compatible.
 Quiet operation: fan noise as low as 33.5 dBA in Eco mode.
 Smart data compression / expansion, and video scaling.
 Convenient wide range (1.5:1) manual zoom and focus lens.
 Preset image offset. Vertical and Horizontal digital keystone correction.
 Accepts Composite, S, and Component Video in all major standards.
 Displays both Regular 4:3 and Widescreen 16:9 ratio video formats.
 Supports all HDTV resolutions. Converts Interlace to Progressive scan.
 Variable Power Management option. Optional local or remote keylock.
 DVI is HDCP compatible. Slideshow Page Up/Down on remote control.
 Custom warm-up screen image option. Factory defaults reset.
 Wireless remote with mouse and Laser pointer. 7X digital zoom.
 3 Year* Projector Warranty!

New Features

1. Optimized Imaging & Optical System delivers 3000 ANSI Lumens.
2. Brushed silver cabinet color.
3. "Film" function for 3:2 pulldown support.
4. Automatic Vertical Keystone Correction (in normal orientation only).
5. Auto SetUp for both or either Auto PC Adjust / Auto Keystone Correct.

6. Shutdown fan speed can be set to continue at current rate or maximum.
7. Projector lock (4 digit) prevents use by unauthorized persons.
8. Logo lock (4 digit) prevents logo change by unauthorized persons.
9. "Blackboard" mode optimizes image when projected on a greenboard.
10. Fan noise 33.5 dBA in Eco mode.
11. Contrast ratio 450:1

Included Accessories: Owner's Manual. AC Power Cord. Lens Cover. VGA type Computer Input Cable (HD15 ~ DVI-I).

Wireless Remote Control With Mouse and Laser Pointer & Batteries (AA x 2). Mouse cable for computer USB Port. Soft Carry Bag.

Optional Accessories: Replacement Lamp. Component Video Input Cable (HD15~3-RCA). MAC Adapter. MAC Monitor Cable. DB9~Mini DIN 8 cable for RS-232 control. Luggage-Style ("wheelie") Carrying Case with Wheels, Telescoping Handle, and Detachable Computer Compartment. ATA-Style Shipping Case with Wheels and Telescoping Handle. Ceiling Mount. Ceiling Post and Plate. 33' (10m) Extension Cable for Serial Cable. Multi Card Director system supports 1. Computerless Slide Show System. 2. Wired Network Data Content & Projector Control. 3. Wi-Fi Content Delivery and Projector Control System. EZtrol Local Control. NPC-1 Network Control.

SPECIFICATIONS: Model LC-XB30


Screen Brightness	3000 ANSI Lumens /2200 in Eco mode	Computer: Lower Resolutions	Displayed normal or Smart Expanded
Illumination Uniformity	85%	Video: Compatibility	NTSC / PAL / SECAM / NTSC 4.43 / PAL-M&N
Size of Color Palette	16.7 Million	Video: HD Compatibility	480i/p, 575i/p, 720p, 1035i, 1080i
Contrast Ratio	450:1 (Full ON/OFF)	Video: Formats Supported	Normal 4:3 and Wide Screen 16:9
Horizontal Resolution	800 TV Lines	Video: Image Sizing	Video Scaling Technology
Projection Lamp	200 Watt UHP	Image Signal Inputs	
Estimated Lamp Life	up to 2,000 Hours	* Computer In 1:	DVI-I x 1 (HD15 via supplied Input Cable)
Imaging System	0.79" PolySilicon active matrix TFT Panels x 3	* Computer: In 2:/ Component In / Computer Monitor out :	HD15 x 1
Screen Pixels	1024 x 768 in stripe configuration	* Video In :	RCA x 1 (Composite) S-Video x 1 (Y/C)
Total Pixels	2,359,296 ((1024 x 768) x 3)	Audio Signal Inputs	
Lens Type	Manual Zoom and Focus	* Computer 1 & 2 / Component	Stereo: Ministereo x 1
Lens Specs	Speed: f:1.7~2.5; FL: .787~1.181 in. (20~30 mm)	* Composite/S-Video	RCA x 2 (L & R)
Lens Ratios	Zoom Max:Min: 1.5:1; Throw:Width: 1.25~1.87:1	Audio: Amplifier	Mono: 1 Watt RMS
Image Diagonal	40~300 in. (102~762 cm)	Audio: Built In Speakers	1.1 in. (2.8 cm) x 1
Image Width	2.67~20 ft. (0.84~6.1 m.)	Audio: Output	Stereo: Ministereo x 1 (Variable)
Throw Distance	3.3~25.3 ft. (1.0~7.7 m.)	Fan Noise	38.5 dBA / 33.5 dBA in Eco mode
Front Elevation / Maximum Tilt	up to 11.8° up / +/- 90°	Cabinet Size** (HxWxD)	2.8 x 11.73 x 8.58in. (71 x 298 x 218mm.)
Anti Keystone	Fixed Image Offset, Ratio (Top:Bottom) 9:1		** excluding legs and lens
Vertical Keystone Correction	Digital: up to 40° up or down	Weight	6.2 lbs. (2.8 kg)
Horizontal Keystone Correction	Digital: up to 20° left or right	Packaged Size (H x W x D)	13.4 x16.6 x14.4in. (340 x 420 x 365mm.)
Scanning Frequency	Auto: H Sync. 15-100kHz; V Sync. 50-100Hz	Packaged Weight	13.9 lb (6.3 kg)
Dot Clock	140 MHz	Power Requirements	100-240V AC, 50/60Hz
Image Orientation	Normal, Reversed, Inverted	Power Consumption	270 W / 196 W in Eco (11 W in standby)
Local Control / Power Management	Full Function / Auto Shut-down	Heat	922 BTU/hr (233 Kcal/hr) / 669 BTU/hr (169 Kcal/hr) in Eco
Remote Proj & Mouse Ctrl	Wireless (Infra Red) with Laser Pointer x 1	Power Cord	10' (3M) Type 3, Detachable
Mouse Port	USB type B x 1	Safety Compliance	UL Listed
Service Port	Mini DIN 8 Pin x 1	Security Facilities	Kensington® Security Slot
Computer Native Resolution	1024 x 768 (XGA)	Operating Temperature	11~40°C / 52~104°F
Computer: Compatibility	SXGA, XGA, SVGA, VGA	User Maintenance	Clean Air
Computer: Formats	1400 x 1050 through 640x480	Warranty: Projector	3 Yr. / 6000 Hr. *(Parts & Labor to Correct Defects)
Computer: Higher Resolutions	Displayed panned or Smart Compressed	Warranty: Lamp	90 Days (Failed Lamp Replaced Pro-Rata

* Whichever occurs first

Caution! Laser Radiation – Do not stare into beam. Max. Output: 1 mW. Wave Length: 640~660 nm. Class II Laser Product.

Lamp contains Mercury. Do not put in trash. Dispose of as Hazardous Waste, according to Local, State or Federal Laws.

XGA "Brilliant" Series

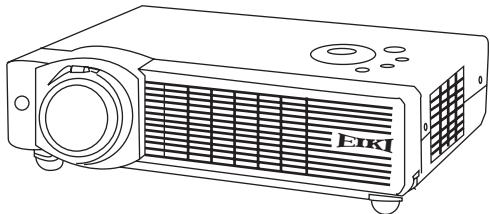

LC-XB30