

P30 Specifications

Model	P30		
Camera	Image pick-up device	1/3" progressive scan CCD	
	Total pixels	1,077 (H) x 788 (V), 850,000 pixels	
	Effective pixels	1,034 (H) x 779 (V)	
	Frame rate	20 frames/sec.	
	Resolution	RGB output 600 (H) x 600 (V) TV lines Video output 450 (H) TV lines	
Optics	Zooming	Powered (with variable speed function), 15X optical, 4X digital	
	Lens	F2.8, f=4.7 to 70.5 mm	
	Shooting area	Max. 405 x 303 mm (15 15/16" x 11 15/16"), min. 30 x 23 mm (1 3/16" x 29/32")	
	Focusing	Auto/Manual (powered)	
	Iris	Auto (with level adjustment)/Manual	
Function	White balance	Full-auto/One-push/Manual	
	Nega/posi conversion	Provided	
	Aperture enhancement	Provided	
	Text mode	Provided	
	Edge enhancement	Provided	
	Color/B&W selection	Provided	
	Pause mode	Provided	
	Digital magnification	Provided (2X, 4X, Scroll)	
	Gamma adjustment	Provided	
	OSD (on-screen display)	Provided	
	Slide show	Provided (SD memory card image)	
	Split display	Provided (SD memory card image, 9-split, 16-split)	
	Image save	Provided (onto SD memory card)	
	Image rotation	Provided (0°, 180°)	
	Sync. system	Internal	
Input/output	Internal selection	Int./RGB1	
	Analog RGB output	XGA (1,024 x 768 @60 Hz), VESA	
	Video output	Composite, S-video	
	RGB input	Provided	
	DVI output	Provided	
PC interface	RS-232C port	Provided	
	USB port	Provided	
Memory card	SD memory card slot	Provided	
Lighting	Upper lighting unit	Provided (twin fluorescent lamp)	
Others	Accessories	I/R remote control, slideshow adapter, cables, etc.	
	Dimensions	Set up	377 x 482 x 180 mm (14 27/32" x 18 31/32" x 7 3/32") (W x D x H)
		Folded	377 x 482 x 582 mm (14 27/32" x 18 31/32" x 22 29/32")
	Weight	4.7 kg (10.4 lbs)	
	Application software	Image Mate for Presentation, Image Mate for Movie Creation, TWAIN driver [for Windows™ 2000 (SP1 or later), Windows™ XP]	
Power source	AC 100 to 240V, 60 Hz		

H: horizontal, V: vertical

Design and specifications are subject to change without prior notice. Some brand names and product names may be trademarks or registered trademarks of their respected owners.

ELMO is a trademark of ELMO COMPANY, LIMITED.

ELMO
FOCUS ON THE FUTURE

ELMO CO., LTD.

6-14, Meizen-cho, Mizuho-ku,
Nagoya, 467-8567, Japan
Tel. 81-52-821-3141 Fax. 81-52-811-5243
E-mail: foreign-div@elmo.co.jp

Distributed by

Additional technical information is available from any of the following subsidiary companies;


ELMO USA Corp.
1478 Old Country Road
Plainview, NY 11803-5034, U.S.A.
Tel. 516-501-1400 Fax. 516-501-0429
E-mail: elmo@elmousa.com
Web: <http://www.elmousa.com>

ELMO Canada Corp.
44 West Drive, Brampton,
Ontario, L6T 3T6, Canada
Tel. 905-453-7880 Fax. 905-453-2391
E-mail: info@elmocanada.com
Web: <http://www.elmocanada.com>

ELMO (Europe) G.m.b.H.
Neanderstr 18,
40233 Düsseldorf, Germany
Tel. 0211-3864-70 Fax. 0211-376630
E-mail: info@elmoeurope.com
Web: <http://www.elmoeurope.com>

Profile

All dimensions in mm (inches)

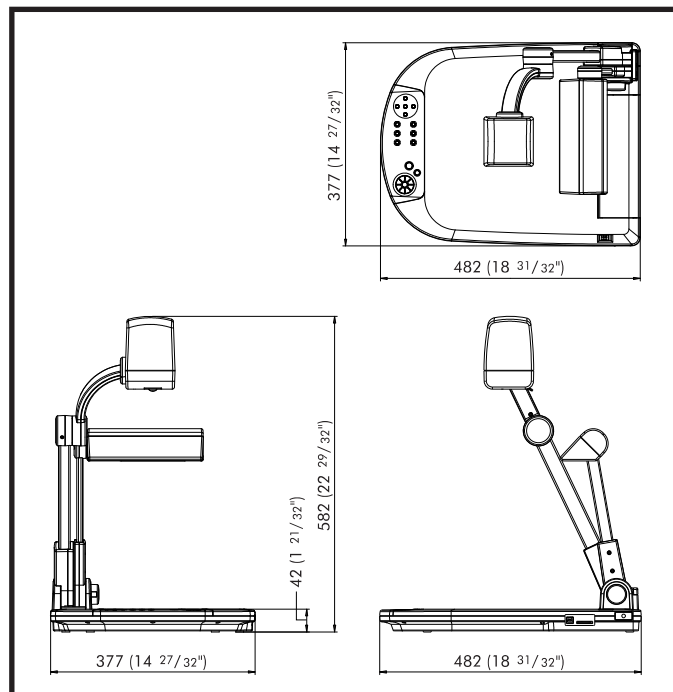

Rear panel



Accessory



Slideshow adapter

Options



5-inch color LCD monitor
LM-5011N
Monitor shoe
MS-30



ELMO CO., LTD. (Head Office and Factory)'s QMS/EMS has been registered to ISO 9001 & ISO 14001.