


# DC265 Visual Presenter

## Quick Start Guide

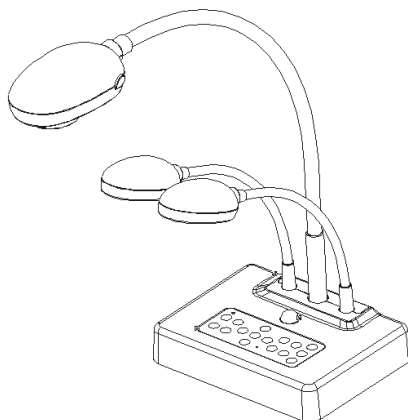






# Touchboards

205 Westwood Ave, Long Branch, NJ 07740



Phone: 866-94 BOARDS (26273) / (732)-222-1511 | Fax: (732)-222-7088

E-mail: [sales@touchboards.com](mailto:sales@touchboards.com) | Site: [www.touchboards.com](http://www.touchboards.com)

# 1. Package Content

|                                                                                     |                                                                                                                                |                                                                                       |
|-------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
| DC265                                                                               | Quick Start Guide                                                                                                              | User Manual<br>(For download of other language versions, please visit Lumens website) |
|    |                                               |      |
| Base Installation Guide & Download Card                                             | Remote control                                                                                                                 | Remote Control Holder                                                                 |
|    |                                               |      |
| Extender Adapter                                                                    | VGA Cable                                                                                                                      | USB Cable                                                                             |
|    |                                               |     |
| C-Video Cable                                                                       | Power Cord                                                                                                                     | Microscope Adapter                                                                    |
|   | <br>Appearance may vary with country/region. |     |
| Accessory Pouch                                                                     | Backlight (Optional)                                                                                                           | Padded Carry Bag (Optional)                                                           |
|  |                                             |    |

## 2. System Diagram

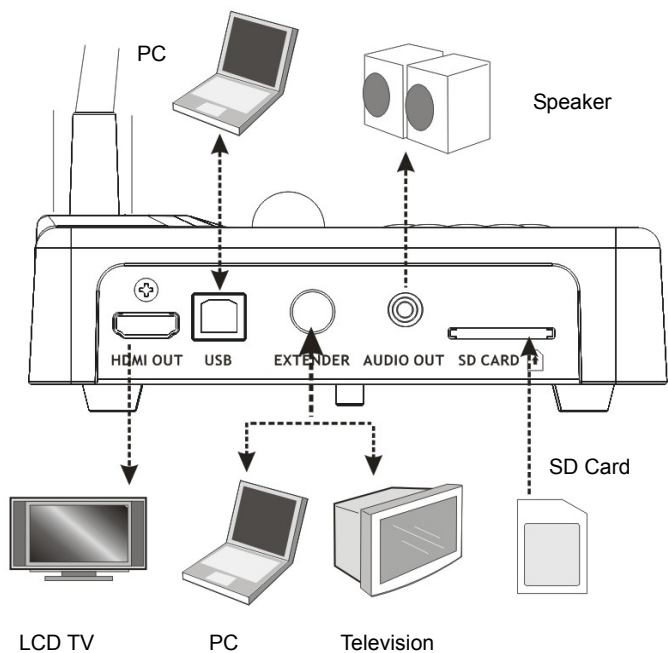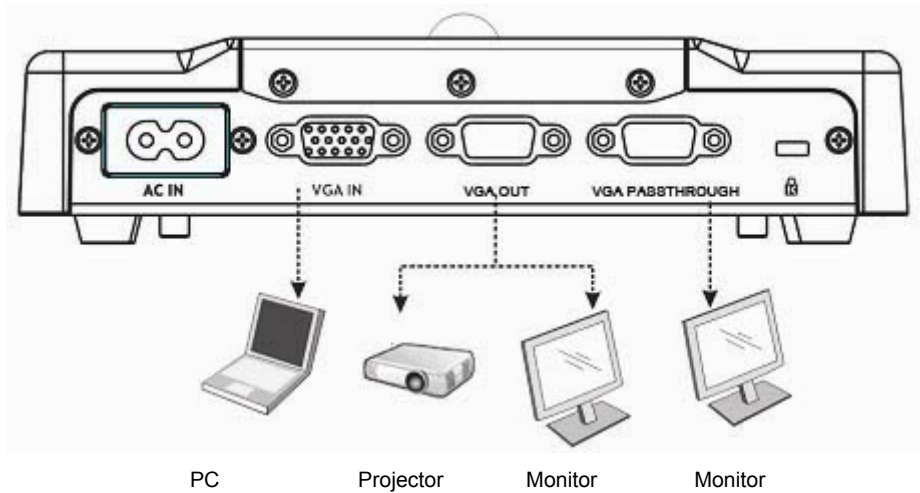

### 3. Mounting the DC265 at Desktop



---

1. Please set up the DIP Switch settings first. Refer to [chapter 5 “DIPSwitch Settings” in the DC265 user manual.](#)
2. Please refer to the [Base Installation Guide](#) for installation instructions for all parts.

### 4. Connecting Devices

---

#### 4.1 Step 1: Plugging in the Power Outlet



AC Outlet






<Note> Appearance of power cord may vary with countries/regions.

#### 4.2 Step 2: Connecting with components

##### 4.2.1 Connecting to a Projector


- Connect the VGA OUT on the DC265 to the VGA IN on the projector using the VGA cable.



##### 4.2.2 Connecting to a Monitor


- Connect the VGA PASSTHROUGH on the DC265 to the VGA IN on the monitor using the VGA cable.

<Note> The VGA PASSTHROUGH connector only outputs VGA IN signals.




### 4.2.3 Connecting to a TV

1. Using EXTENDER and C-Video cable to connect EXTENDER of DC265 to a C-Video of TV.

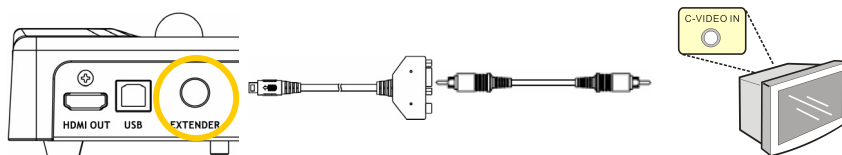


#### 2. Adjust DIP Switch Setting

- NTSC : America, Taiwan, Panama, Philippine, Canada, Chile, Japan, and Mexico.



- PAL : Country/region not listed above:




**<Note> OSD is not available in C-Video. Functions such as [Menu] / [Rotate] / [PAN] / [Source] / [Record] / [Capture] / [Delete] / [PBP] / [Slide Show] are not available on control panel and the remote control.**

**<Note> VGA output is not supported once C-Video output is enabled.**

3. DIP Switch setting will not be available until restarting the DC265.


### 4.2.4 Connecting to a LCD TV/ PDP

- Using the HDMI cable to connect a LCD TV/ PDP

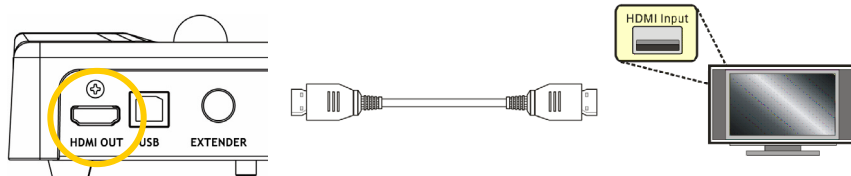


## 4.2.5 Connecting to a Computer

- Connecting to a computer through VGA IN

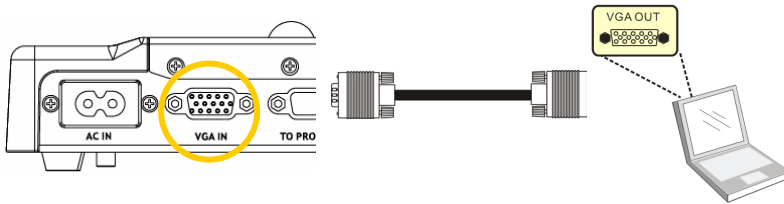


- Connecting to a computer through USB


Connect to USB port then install the supplied queue™ program. Please refer to the [DC265 user manual](#)

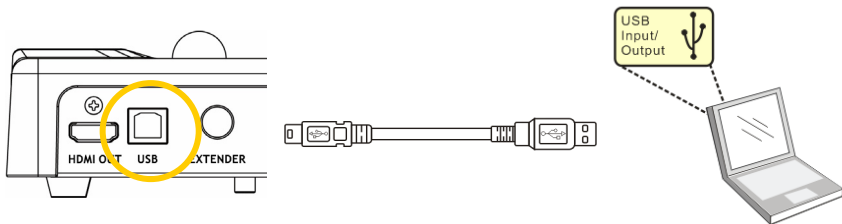

- Using the EXTENDER and RS-232 cable to connect EXTENDER of DC265 to a RS-232 of computer.

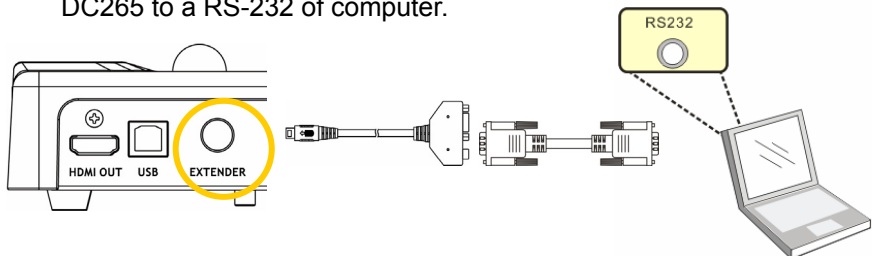


## 4.2.6 Connecting to Speaker

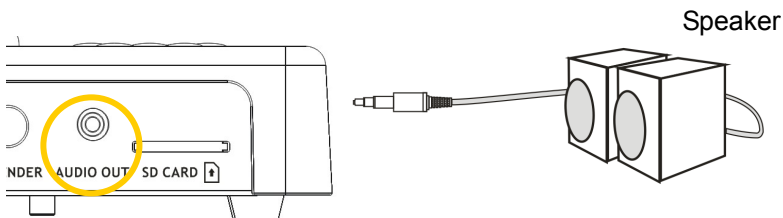

## 5. Start Using the DC265

---

### 5.1 Turn on the DC265

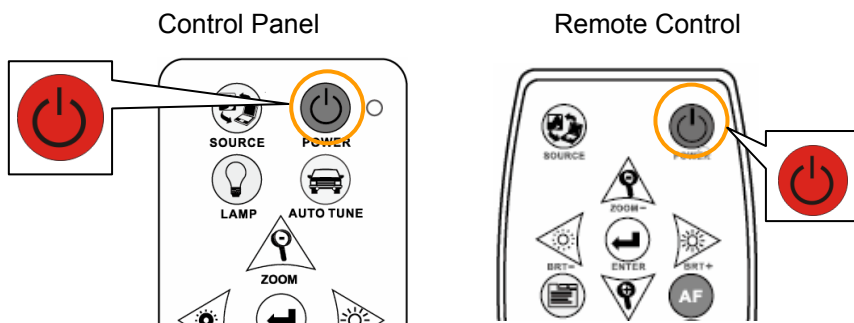

- When using the **remote control**, aim at the receptor on the DC265, and press the power button.
- Once DC265 is turned on, the LED on the **control panel** will flash a few times and stay lit. Please contact your distributor if the LED is not on.

**<Note>** Once the password page is shown, please key in the password. If you forget it, please contact your distributor or the service center.

\*For detailed menu function introduction and operation instructions, please refer to the [user manual](#).