

## **DC80A**Digital Visual Presenter



## **DC80A**Digital Visual Presenter

- Designed with ease-of-use in mind
- Small buttons on top of the unit control all functions

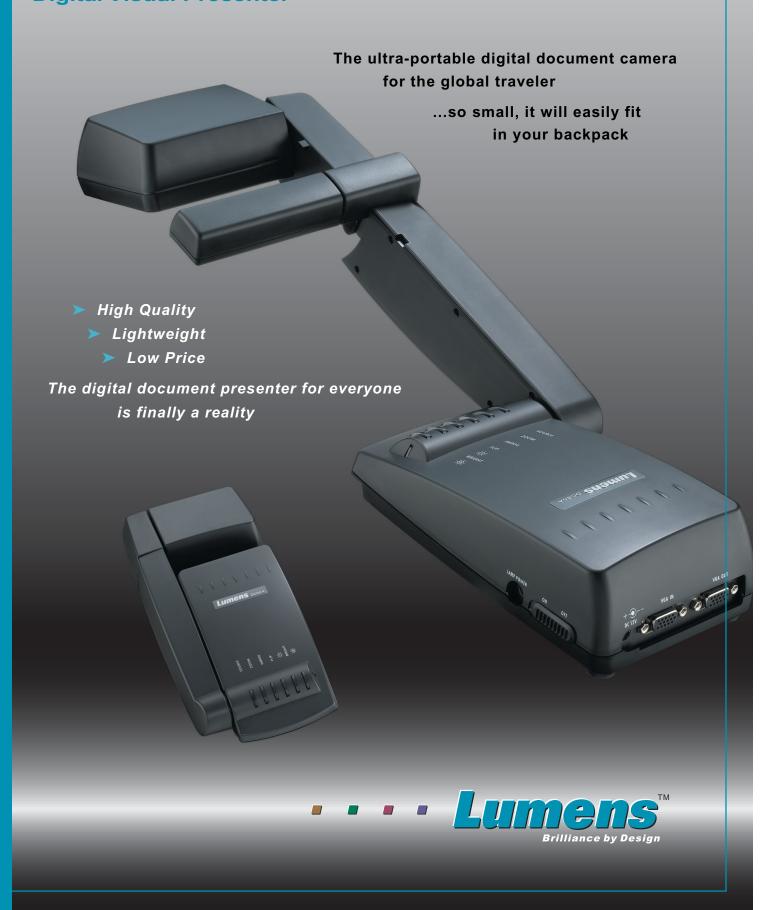



3D objects and image details can be clearly viewed by extending and positioning the arm



## **Specifications**

(Subject to change without notice)

		(,g
Imaging	Image Sensor	1/3" 850K progressive-scan CCD
	Lens	F3.6, f=5.0 mm
	Effective Pixels	1024 (H) x 768 (V), XGA
	Frame Rate	20 frame/second
	Shooting Area	10" x 13"
	Zoom	Mechanical 6x and 16x digital
	Focusing	Manual
	Capturing Modes	Presets for Photo/Text/Slide/Negative mode
	Image Rotation	Up to 180 degrees flip and rotation
	White Balance	Auto/Manual
	Exposure	Auto/Manual
	Screen Freeze	Push button operation

Lighting	Side Illumination	1 cold cathode lamp on arm
Output	RGB, Computer	D-sub 15 pin (VGA) RGB analog, XGA/SVGA 75Hz
	Synchronization	(H) 60k/47kHz, (V) 75Hz TTL level, positive polarity
Input	RGB, Computer	D-sub 15 Pin (VGA)
Accessories	Included	Soft padded carrying case, VGA cable, external power adapter, 110 V power cord
General	Power Requirements	AC auto switching 100-240 VAC, 50/60 Hz
Specifications	Dimensions	Folded, 11.4" L x 5.5" W x 2.3" H Open, 14" L x 5.5" W x 16.5" H
	Weight	3.3 lbs. (Shipping Weigh 8 lbs)
	Safety / EMI	UL/C-UL & FCC Class A, CE
	Warranty	2 years



205 Westwood Ave, Long Branch, NJ 07740 Phone: 866-94 BOARDS (26273) / (732)-222-1511 Fax: (732)-222-7088 | E-mail: sales@touchboards.com www.touchboards.com 205 Westwood Ave.Long Branch, NJ 07740 1-866-942-6273 Sales@touchboards.com