

HD72 | Home Theater Projector



F E A T U R E S

- **Highest quality**, entry level **720p home theater** projector in the market
- **1300 lumens with 5000:1** contrast ratio in ImageAI™ mode
- **HD compatibility 1080p and UXGA**
- **7 segment** color wheel
- Long lamp life of **3000 hours**
- **Texas Instruments' DarkChip2™** Chipset
- **TrueVivid™** color enhancement
- **TrueVision™** motion-adaptive enhancement
- **Wide angle zoom lens** with throw ratio of 1.58-1.90:1
- Light shield design and **ultra-quiet operation**
- **Dual digital HD connectivity** (DVI-I and HDMI)
- **YPbPr, RGB, SCART** support
- Supports 18 languages

HD72 – Great Quality...Great Performance...Great Value

The Optoma HD72 projector is a true 720p, high-performance projector for home theater enthusiasts. The HD72 features unique color processing technologies to deliver higher brightness and provide truer, more vibrant colors to the projected picture. And, with 10-bit per channel color processing, a 7-segment color wheel and its 5000:1 contrast ratio, the Optoma HD72 DLP® home theater projector delivers great color saturation and subtle color details for the best image quality.





HD72 | Home Theater Projector




SPECIFICATIONS	
Display Technology	Single 0.65" DarkChip2™ DLP® Technology by Texas Instruments
Brightness (Typical)	1300 Lumens
Weight	7 lbs (3.2 kg)
Resolution	WXGA (1280 x 768)
Maximum Resolution	UXGA (1600 x 1200), 1080p (1920 x 1080)
Dimensions (W x H x D)	13.56" x 3.72" x 9.67" (344 x 94 x 246 mm)
Contrast Ratio	5000:1 in ImageAI™ Mode and 3500:1 (Full On/Full Off)
Noise Level	27dB (STD)
Lamp Type / Life	220W UHP / 3000 Hours (STD)
Image Optimization	Faroudja DCDi™
Image Size	28" - 304" (0.7 to 7.7 m)
Projection Distance	3.9' - 39' (1.2 to 11.9 m)
Computer Compatibility	UXGA, SXGA+, WXGA, XGA, SVGA, VGA Compression, VESA Standards, PC and Macintosh Compatible
Video Compatibility	NTSC (M, 3.58/4.43 MHz), PAL (B, D, G, H, I, M, N), SECAM (B, D, G, K, K1, L), HDTV (720p, 1080i/p)
Aspect Ratio	16:10 Widescreen Native with Support for 4:3 and 16:9
Projection Lens	F/2.5-2.8, f = 22.25-26.69mm, 1.2x Manual Focus/Digital Zoom
Keystone Correction	Horizontal and Vertical
Throw Ratio	1.58 to 1.90:1 (Distance/Width)
Vertical Refresh Rate	43 to 85 Hz
Power Supply	100-240 Volts, 50-60 Hz
Power Consumption	285 W ± 10% Full Power, < 13W Standby Power
Operating Temperature	Operating: 5 - 35°C, 80% Humidity (Max.) Storage: -20 - 60°C, 80% Humidity (Max.)
Displayable Colors	10-bit per Channel Color Processing
Projection Method	Front, Rear, Ceiling Mount, Table Top
Security	One Kensington® Lock Port
Uniformity	90%
I/O Connectors	HDMI, DVI w/HDCP, Component Video, Composite Video (RCA), S-Video, RS-232, Two IR Receivers, +12V Trigger
Standard Accessories	Composite Video Cable, S-Video Cable, Remote Control, Batteries for Remote, Lens Cap, User's Manual, Quick Start Guide, Warranty Card, Power Cord
Warranty	2 Years Limited Parts and Labor, 90 Days on Lamp
Optional Accessories	Ceiling Mount Kit, GrayWolf™ Series Screens, Carrying Case and Extended Warranty
UPC	796435 11 589 0

Image and color enhancement technologies

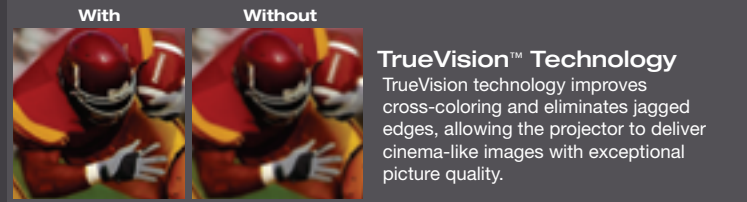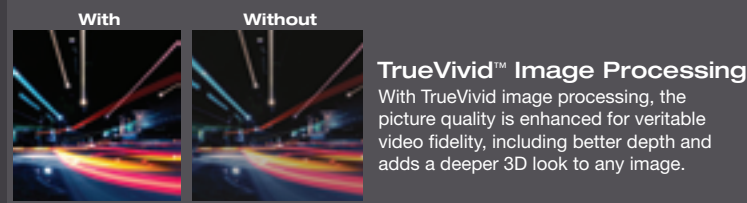

I/O Ports

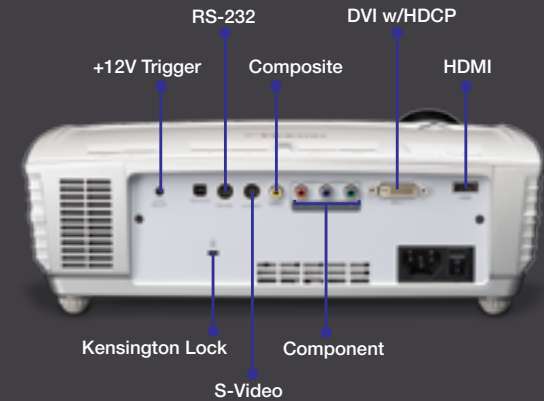

Dimensions



Image Artificial Intelligence
auto adjusting light intensity output

Now with ImageAI™

HIGH LUMENS ALONE

Increases clarity in lighter areas... →

← But makes dark areas washed out.

HIGH CONTRAST ALONE

Increases detail in darker areas... →

← But makes lighter areas appear dark.

ONLY ImageAI™ GIVES YOU BOTH!

HIGH 1300 LUMENS
for amazing clarity in light image areas... →

PLUS

HIGH 5000:1 CONTRAST
for details in dark areas and shadows →

ImageAI™ "Image Artificial Intelligence", Optoma's auto adjusting light intensity output, delivers an amazing **1300 lumens AND 5000:1 contrast ratio!**

PROJECTION DISTANCE/IMAGE SIZE

Projection Distance (feet)	Maximum Diagonal (inches)	Minimum Diagonal (inches)
6	52.28	43.48
8	69.71	57.97
10	87.14	72.46
12	104.57	89.96
14	122.00	101.45
16	139.42	115.94
18	156.85	130.44

Available at

Touchboards

205 Westwood Ave, Long Branch, NJ 07740
Phone: 866-94 BOARDS (26273) / (732)-222-1511
Fax: (732)-222-7088 | E-mail: sales@touchboards.com

Optional Accessories

Bering™
Ceiling
Mount

