

PRC FLAT PANEL CEILING ADAPTER



Each adapter comes with two VESA mounting plates – one combination of 75/100 (mm) and one 75 (mm)- plate only for smaller mounting surfaces. All Prestige flat panel mounts easily support most VESA-standard LCD flat panels on the market today.

MOUNT OVERVIEW

PRA FLAT PANEL MOUNT


Features: Tilt mount allows of adjustments up and down of $\pm 90^\circ$ from center and 360° swivel and cable access. Comes with a combination plate of VESA 75 and VESA 100 for optional mounting depending on monitor.

Lbs: 2


Description	Qty	Size
Phillips screws	4	M4 x 10
Security screw	1	M6 x 12

HARDWARE

NOTE: If the screws (supplied) require to be longer than M4 x 10 (mm) for your monitor, use commercially available (suitable hardware) to complete your installation.

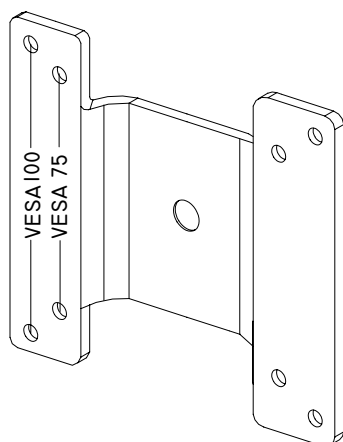

VESA 75 to VESA 100 front plate
NOTE: Only used for monitors that are VESA 100

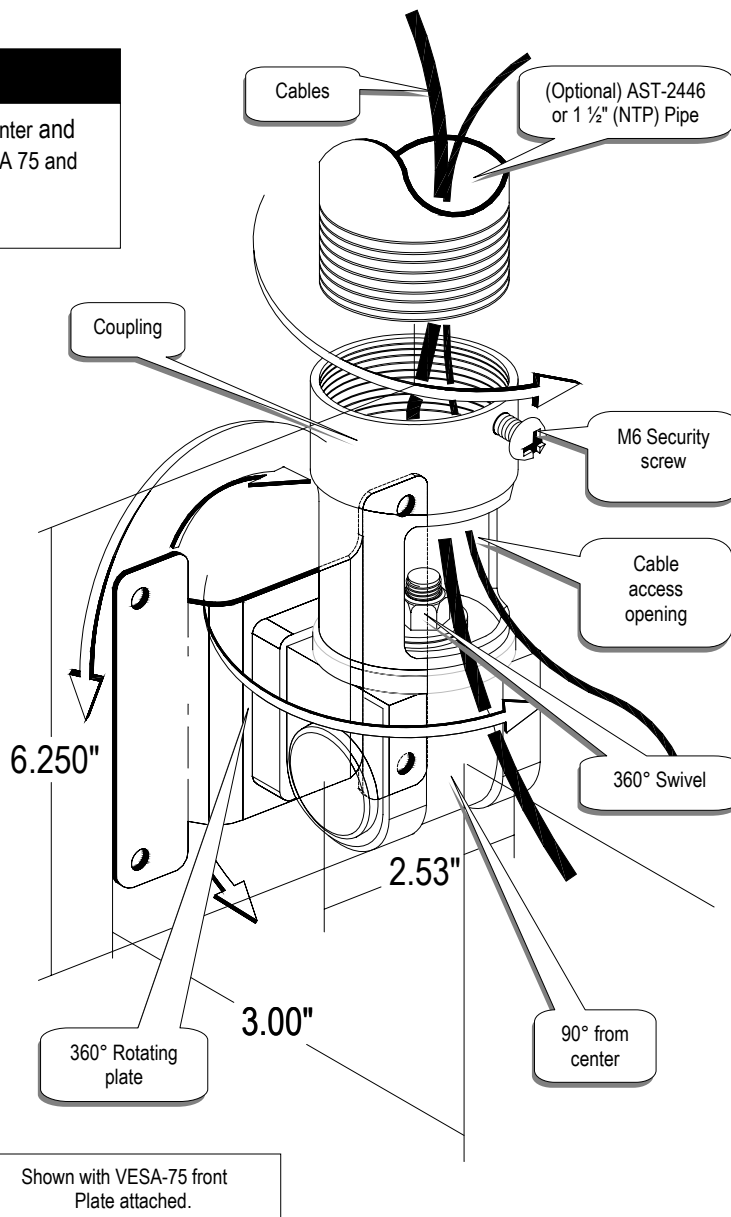

PRESTIGE

By Premier Mounts


Touchboards

205 Westwood Ave, Long Branch, NJ 07740
Phone: 866-94 BOARDS (26273) / (732)-222-1511
Fax: (732)-222-7088 | E-mail: sales@touchboards.com

WARNING!



The wall, floor or ceiling should be capable of supporting a weight of at least five (5) times the monitor's weight. If it cannot, the wall, floor or ceiling must be reinforced. Proper installation procedure by qualified personnel as outlined in the installation instructions must be adhered to. Failure to do so could result in serious personal injury.



CAUTION! The entire installation instructions should be fully read and understood, including all of the safety symbols and safety precautions before beginning installation. The installation instructions should be read, understood and followed to prevent personal injury or property damage. Keep these installation instructions in an easily accessible location for future reference.



Indicates that the power plug is to be disconnected from the power outlet.



Safety precautions must be taken at all times.




Warning and caution in general

Step 1

Screw the PRC coupling adapter to the (optional) AST-2446, APP-2446 Adjustable suspension adapters or 1½" (NTP) Pipe. Secure the coupling with the M6 security screw (supplied). See figure 1.

Figure 1

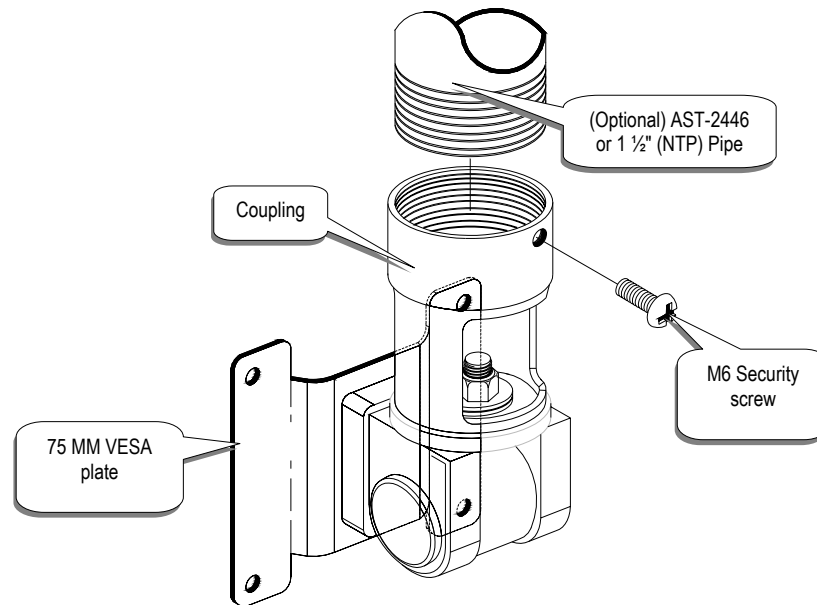

Step 2


Each adapter comes with two VESA mounting plates – one combination of 75/100 (mm) and one 75 (mm) plates. Invert the monitor and place it on a soft and flat surface to prevent the monitor from scratching. Determine if your monitor is a VESA 75 or a VESA 100.

VESA 75: Raise and secure your monitor to the plate that comes installed on the PRC adapter use the four (4) M4 x 10 (mm) Phillips screws (supplied) and a Phillips screwdriver. **(Do not use other tools other than a Phillips screwdriver to prevent damage to the monitor or mounting points).**

NOTE: If your monitor requires longer screws than those supplied use (commercially available) suitable hardware for your monitor.

CAUTION: Do not over tighten the screws to the monitor failure to do so could result on damaging the monitor or the mounting points. See figure 2.

Figure 2

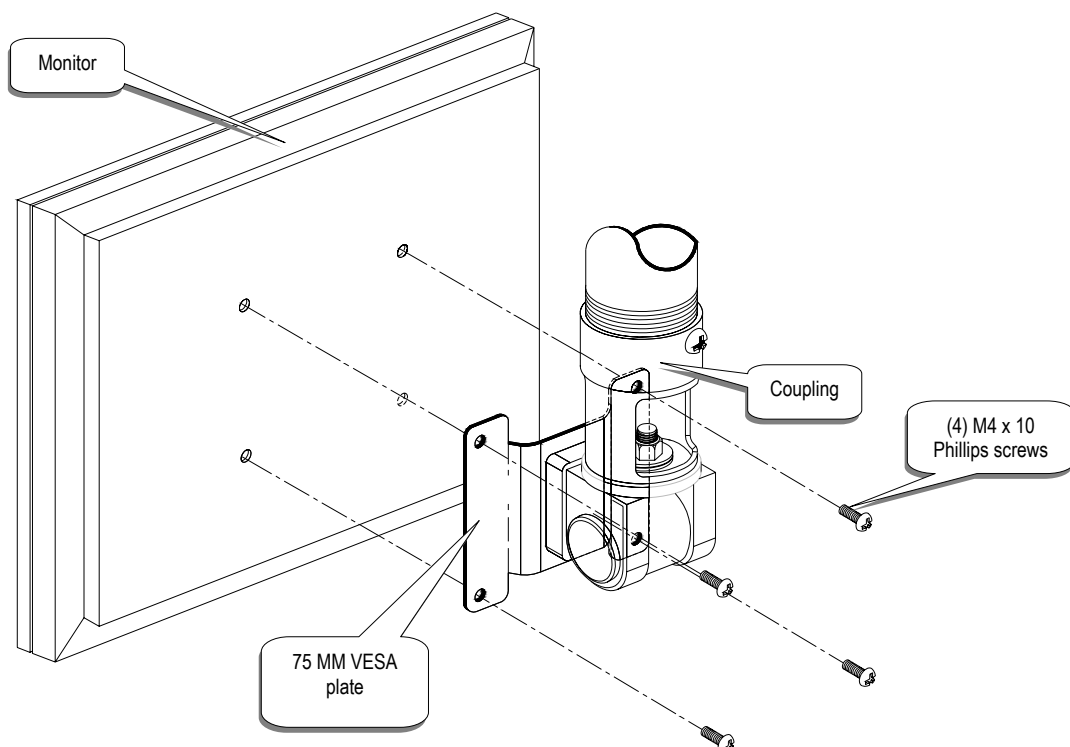


VESA 100: Secure the VESA 75/100 mounting bracket to the VESA 75 Using the four M4 x 10 Phillip screws. Raise and secure your monitor to the plate that has the VESA 100 now on you PRC adapter and use the four (4) M4 x 10 (mm) Phillips screws (supplied) and a Phillips screwdriver. **(Do not use other tools other than a Phillips screwdriver to prevent damage to the monitor or mounting points).**


NOTE: If you monitor requires longer screws than those supplied use (commercially available) suitable hardware for you monitor.

CAUTION: Do not over tighten the screws to the monitor failure to do so could result on damaging the monitor or the mounting points. See figure 3.

Figure 3

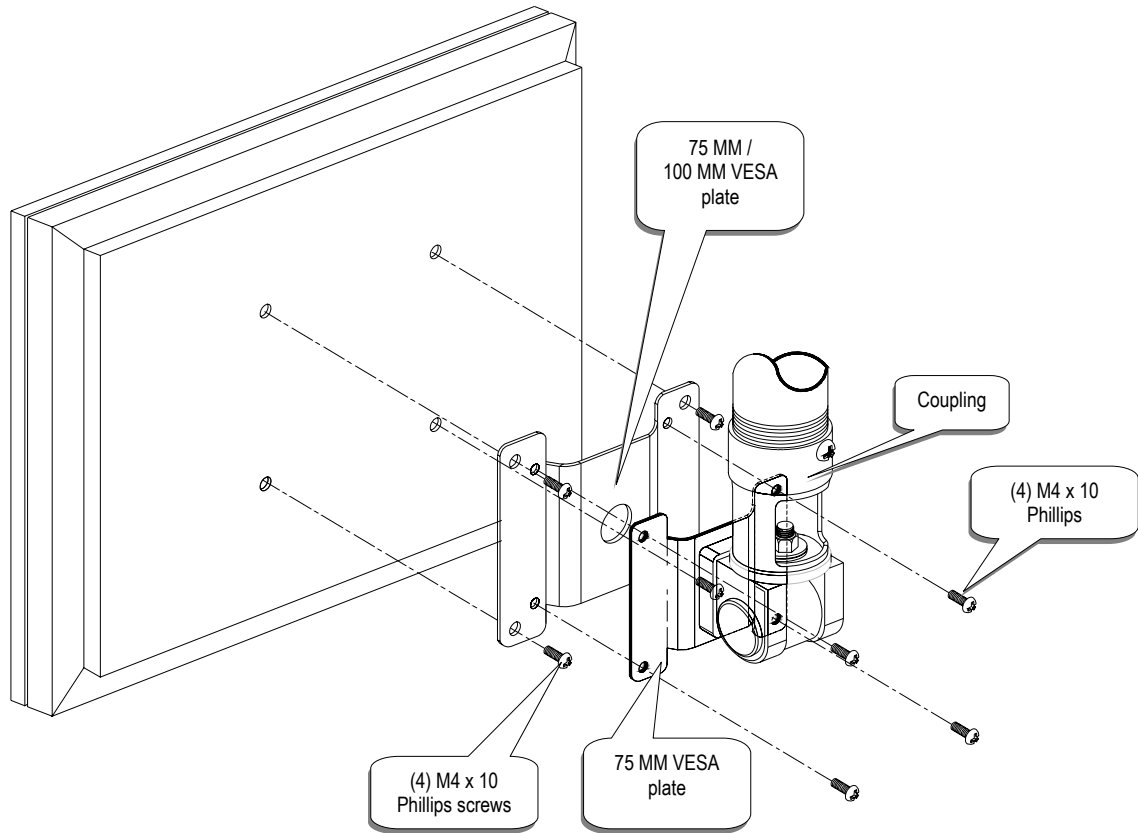

TENSION ADJUSTMENTS

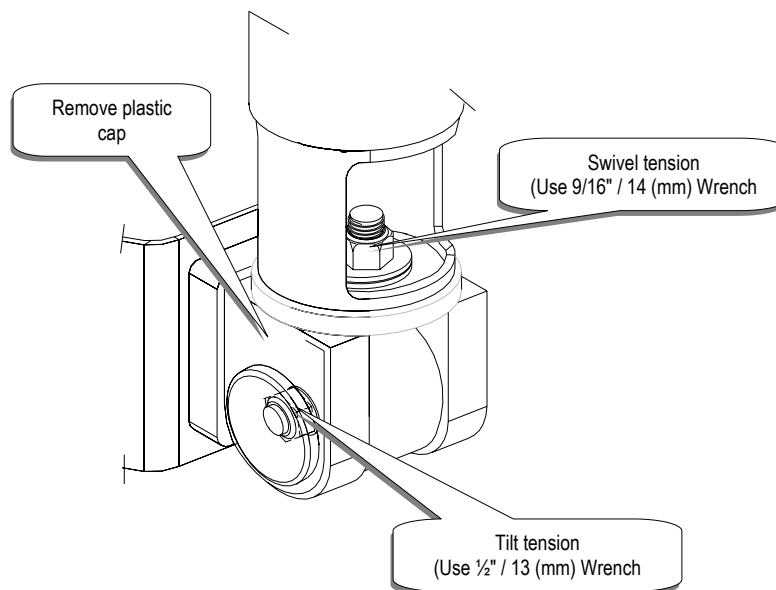

Thank you for choosing PREMIER MOUNTS INC. for your installation needs.
If you have any questions please contact PREMIER MOUNTS INC. information is shown on the front of this page.