

Samsung Digital Presenter SDP-6500

The Best Just Got Better
15fps at 1.5Megapixel resolution

The Samsung SDP-6500 builds on the SXGA reputation of its predecessor, the SVP-6000. Now sporting a faster frame rate, a new high-speed autofocus zoom lens, digital rotation, image storage, annotation and more....the SDP-6500 sets the new standard for high-resolution presentations.


- 1/2" 1,500,000 Pixel Progressive Scan CCD with 15 Frames / Second
- 12X Powered Autofocus Optical Zoom Lens (F2.9, f=6.3-75.6mm)
- Digital Image Rotation
- Built-in Annotation and Image Storage



Samsung Digital Presenter SDP-6500

SPECIFICATIONS	DESCRIPTION	REMARK
Optical system	Lens, Zoom	F2.9, f=6.3~75.6mm (12X Powered AF Optical Zoom)
	Shooting Area	MAX: 384mm X 272mm (15.1 X 10.7 Inch), MIN: 50mm X 40mm (1.9 X 1.6 Inch)
	Focus	Auto Focus / Manual Focus
	Iris	Auto / Manual
	Adaptor lens	Removable
Video	Pick-up device	1/2" 1,500,000 Pixel PS (Progressive Scan) CCD
	Total pixels	1,434(H) X 1050(V)
	Effective pixels	1,360(H) X 1024(V)
	Frame rate	15 frames/sec
	Sync system	Internal Sync.
	Resolution	VGA out - Horizontal: 700TVL / Video out - Horizontal : 400TVL
	S/N Ratio	48dB
	Video output	C-Video / S-Video
	VGA output	1,280 X 1,024 (SXGA) RGB color / 1,024 X 768 (XGA) RGB color / 800 X 600 (SVGA) RGB color
	White Balance	Auto / Manual
PC Interface	USB	Built-in
	RS-232C	Built-in
	Application Software	WIN / MAC
	Graphic User Interface	On Screen annotation via PS/2 Mouse (included) / Pull down Menu for control
Digital Functions	Image freeze	Available
	Negative/Positive	Selectable
	Image Save & Recall	8 frames save, 3X3 Frames Multi-Display
	Image Split & Shift	2 Images (Stored / Live)
	Image Rotation	Switchable by 90°, 180°, 270°, 360°
	Preset Save	4 User Presets with up to 8 Functions (Zoom, Focus, Iris, Posi/Nega & etc.)
Lighting system	Upper lamp	Side arm Lamps
	Lower lamp	Bottom Light Box
Terminals	Input	VGA X 2 / Mouse X 1
	Output	VGA (15P Din) X 2 / S-Video X 1 / C-Video X 1 (RCA) / USB X 1 / RS-232C(9 PIN) X 1
Remote controller		Supplied
Operation temperature		+5°C ~ +35°C
Operation Humidity		30% - 90%
Power Source		AC 100V ~ 240V Free Voltage, 50/60Hz
Power consumption		50W
Weight		9.2Kgs (20.2lb)
Dimension		665mm(W) X 562mm(H) X 510mm(D) (IN USE) / 26.1(W) X 22.1(H) X 20(D) Inch (IN USE)
Optional Accessories		LCD Monitor

Dimension

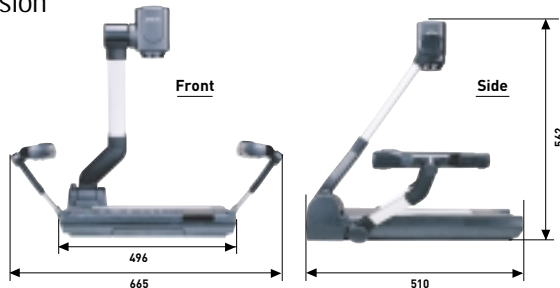

OPTION



LCD-5500

You can preview your presentation.

www.samsungpresenter.com

Design and specifications are subject to change without notice.

Touchboards

205 Westwood Ave, Long Branch, NJ 07740

Phone: 866-94 BOARDS (26273) / (732)-222-1511

Fax: (732)-222-7088 | E-mail: sales@touchboards.com

■ DISTRIBUTED BY

