



Now...!

It's time to bring your presentation to life and let it captivate your audience.

Samsung Digital Presenter **SDP-900DXA**

- 1/3" progressive scan CCD (850,000 pixels)
- 20fps Fast Display, USB 2.0 PC Interface
- Various External Output Supports - 1 DVI , 2 VGA
- Versatile Digital Functions :
image split, shift, freeze & rotate,
3x3 screen display and 8 pictures store
- 8 Preset Functions with up to four conditions.
- Easy to Use GUI Menus with Built-in Annotation
- Dynamic 36X Zoom (12X Optical & 3X Digital)






Samsung Digital Presenter **SDP-900DXA**

SPECIFICATION	DESCRIPTION	SDP-900DXA
Optical system	Lens	F=1.5(Wide) ~ 2.1(Tele) f=5.2-66.5, 12x power zoom
	Shooting Area	Max : 299 x 224mm, Min : 21 x 16mm
	Zoom	Powered (12X), Digital(3X)
	Focus	Powered (Auto Focus/Manual)
Illumination system	Iris	Auto (with fine level adjustment)
	Upper	Attached to the side arm of the main unit
	Lower	Light box (built-in main unit)
Video	Pick-up Device / Effective pixel	1/3" 850,000 pixels PS CCD / 1034(H) x 779(V)
	Frame rate	20 frame/sec
	Sync system	Internal sync.
	VGA output	1024 x 768(XGA) RGB color
	Video output	C-Video VBS 1.0Vp-p / 75ΩY(unbalance)
		S-Video Y : 1.0Vp-p / 75ΩY(unbalance)
		C : 0.286Vp-p / 75ΩY(unbalance)
	White Balance	Manual / Auto (one touch type)
	Negative / Positive	Selectable
	Freeze	built-in
	Input terminals	VGA:2
	Output terminals	VIDEO : 1, VGA : 2, USB : 1, DVI: 1, RS-232C :1, S-Video : 1, C-Video: 1
	NTSC / PAL	Selectable
	Remote controller	Supplied
	GUI(Graphic User Interface)	Supplied
	Input selection	3 channels (Internal : 1, External: 2)
	On-screen display	Available
	Image freeze	Available
	Image save	Available (8 frames)
	Image recall	Available (8 frames)
	Image divide	Available (2divide of 9 divide)
	Image rotation	Available (90°, 180°, 270°)
	Image transfer to computer	Available (USB : QUAR, HALF, FULL, SCREEN FULL)
	Preset function	Up to 4 user settings
PC connection	USB	USB 1.1 / 2.0
	RS-232C	SET control
	Application software	Viewer software: Windows 98 or higher / Mac OS 10.2 or higher TWAIN Driver for Windows AVI Capture software for Windows
General	Operating temperature/Humidity	+5°C ~ +35°C, 30% ~ 90%
	Power	DC12V (Adaptor INPUT: AC100V~240V Free Voltage, 50/60Hz, OUTPUT: 12V, 4.0A)
	Dimensions	In-use : 760(W) x 573(H) x 558(D)mm / 29.9(W)" x 22.6(H)" x 21.9(D)" Storage : 562(W) x 165(H) x 573(D)mm / 22.1(W)" x 6.5(H)" x 22.6(D)"
	Weight	10kg / 22 lb
	Accessories	Remote controller, Cables, etc.

Rear Panel



Dimension

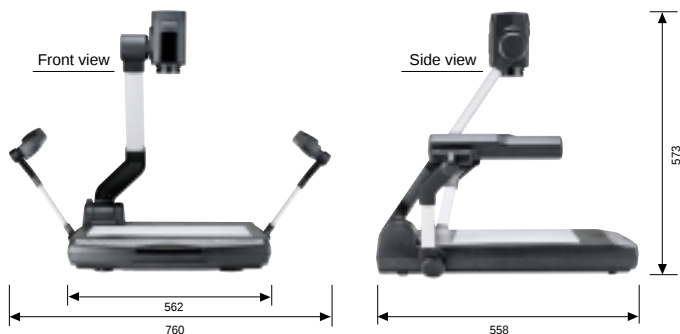

www.samsungpresenter.com



Design and specifications are subject to change without notice.

■ DISTRIBUTED BY



SAMSUNG
SAMSUNG TECHWIN CO., LTD.
145-3, Sangdaewon 1-dong, Jungwon-gu,
Seongnam-si, Gyeonggi-do 462-703, Korea
Tel : +82-31-740-8137~8141 Fax : +82-31-740-8145

Touchboards

205 Westwood Ave, Long Branch, NJ 07740
Phone: 866-94 BOARDS (26273) / (732)-222-1511
Fax: (732)-222-7088 | E-mail: sales@touchboards.com

I.D-0503