

Samsung Digital Presenter

SDP-900DXR

The best of the best among XGA
document cameras

1. Professional lens

The brightest and finest picture quality come true by the specialized 1/3" PS CCD, exclusive 12X optical zoom and continuously working Auto focus. Furthermore, an object 1cm ~ 25cm can be seen without any focus adjustment after the initial setting.

2. TRUE XGA resolution

You will see the difference in the image quality when you compare the SDP-900DXR with other competitive brands. The lens incorporated in the SDP-900DXR is made specifically for the presenter and not a video camera recorder.

3. Powerful Digital Function

The SDP-900DXR offers many digital functions that will help improve and breeze through your presentation (Image rotation, GUI, PC interface etc)

4. Versatile projection capabilities

The SDP-900DXR and other Samsung Presenter products offer the capability of projecting negative and positive film, transparency film and slide film.






SPECIFICATION	DESCRIPTION	SDP-900DXR
Optical system	Lens	F=1.5(Wide) ~ 2.1(Tele) f=5.2-66.5, 12x power zoom
	Shooting Area	Max : 298 x 217mm, Min : 21 x 16mm
	Zoom	Powered (12X), Digital(3X)
	Focus	Powered (Auto Focus/Manual)
	Iris	Auto (with fine level adjustment)
Illumination system	Upper	Attach to the side arm of the main unit
	Lower	Light box (built-in main unit)
Video	Pick-up Device / Effective pixel	1/3" 850,000 pixels PS CCD / 1034(H) x 779(V)
	Frame rate	15 frame/sec
	Sync system	Internal sync.
	VGA output	1024 x 768(XGA) RGB color, 800 x 600(SVGA) RGB color
	Video output	C-Video VBS 1.0Vp-p / 75Ω (unbalance) S-Video Y : 1.0Vp-p / 75Ω (unbalance) / C : 0.286Vp-p / 75Ω (unbalance)
	White Balance	Manual / Auto (one touch type)
	Positive / Negative	Selectable
	Freeze	built-in
	Input terminals	VGA:2
	Output terminals	VIDEO : 1, VGA : 2, USB : 1, RS-232C : 1, S-Video : 1, LCD : 1
	NTSC / PAL	Selectable
	Remote controller	Supplied
	GUI(Graphic User Interface)	Supplied
	Input selection	3 channels (Internal : 1, External: 2)
	On-screen display	Available
	Image freeze	Available
PC connection	Image save	Available (8 frames)
	Image recall	Available (8 frames)
General	Image divide	Available (2divide of 9 divide)
	Image rotation	Available
	Image transfer to computer	Available (USB : full, 1/4, 1/16 mode)
	Preset function	Up to 4 user settings
	USB	built-in
RS-232C		SET control
	Application software	Viewer (for Windows 98, 98SE, ME, 2000 Professional, XP & Mac OS X), TWAIN Driver (for windows)
General	Operating temperature/Humidity	+5°C ~ +35°C, 30% ~ 90%
	Power	AC 100V ~ 240V Free Voltage, 50/60Hz, 50W
	Dimensions(mm)	In-use : 676(W) x 580(H) x 558(D) / Storage : 533(W) x 167(H) x 582(D)
	Weight	11.5Kg
	Accessories	Remote controller, Cables, etc.

Rear Panel



Dimension

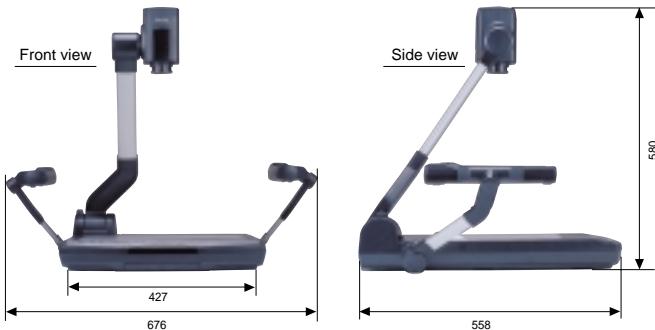

Option




: LCD-5500

You can preview your presentation.

www.samsungpresenter.com

Design and specifications are subject to change without notice.

■DISTRIBUTED BY

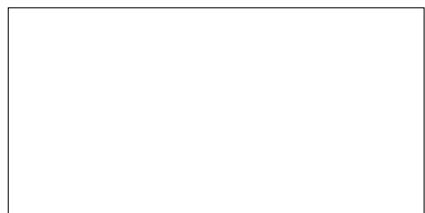

Touchboards

205 Westwood Ave, Long Branch, NJ 07740

Phone: 866-94 BOARDS (26273) / (732)-222-1511

Fax: (732)-222-7088 | E-mail: sales@touchboards.com