

SAMSUNG

TECHWIN

SAMSUNG DIGITall
everyone's invited™

Samsung Digital Presenter **SDP-950ST/DX**



Compact



Professional Lens



Easier to Use





www.samsungpresenter.com

www.touchboards.com 205 Westwood Ave. Long Branch, NJ 07740 1-866-942-6273 Sales@touchboards.com

.... Compact

Saving Space
in Your
Conference Room






Compact...

Easy To Carry



: 5.5kgs (Body only)

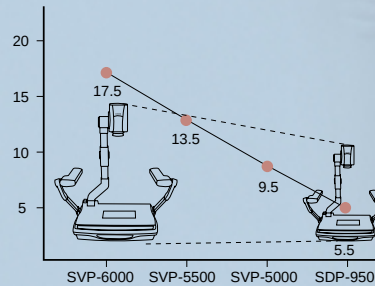

Saving Space in Your Conference Room



: Deluxe Carrying Bag (option)






Lens...

Professional Lens

: The Brightest And Finest Picture Quality By 1/3" 850,000 Pixels PS[Progressive Scan] CCD




: An Exclusive 12X Powered Optical Zoom Lens(F3.0, f=6.3~75.6mm)



: The Fastest And Perfect Auto Focus / Depth of Field 250mm



: Continuously Working Auto focus
: 15 Frame Rate Per Second









Easier to Use



Easier to Use....

: Convenient Digital Function

- 90° / 180° / 270° / 360° Rotation (Zoom Available) - Image Split & Shift
- 3X3 Screen Display - 8 Frames Save - 8 Functions Preset upto 4 Conditions
- Image Freeze - Negative / Positive Image Conversion



: The Most Versatile PC And AV Interface (USB, RS-232, Twain, Win/Mac)



: Pull down Menu, Writing & Drawing on the Screen by PC Mouse (PS/2)





Presentation

Image processing



Court

Conference

Tele Conferencing

.... Applications

Education



Applications...


The most perfect for use in **education, presentations, seminars, tele-conference, court, factory inspection** and various **image processing works**.



Education




Conference



Court




Image processing
(Advertisement, design, broadcasting)




Presentation




Tele Conferencing



Connection...

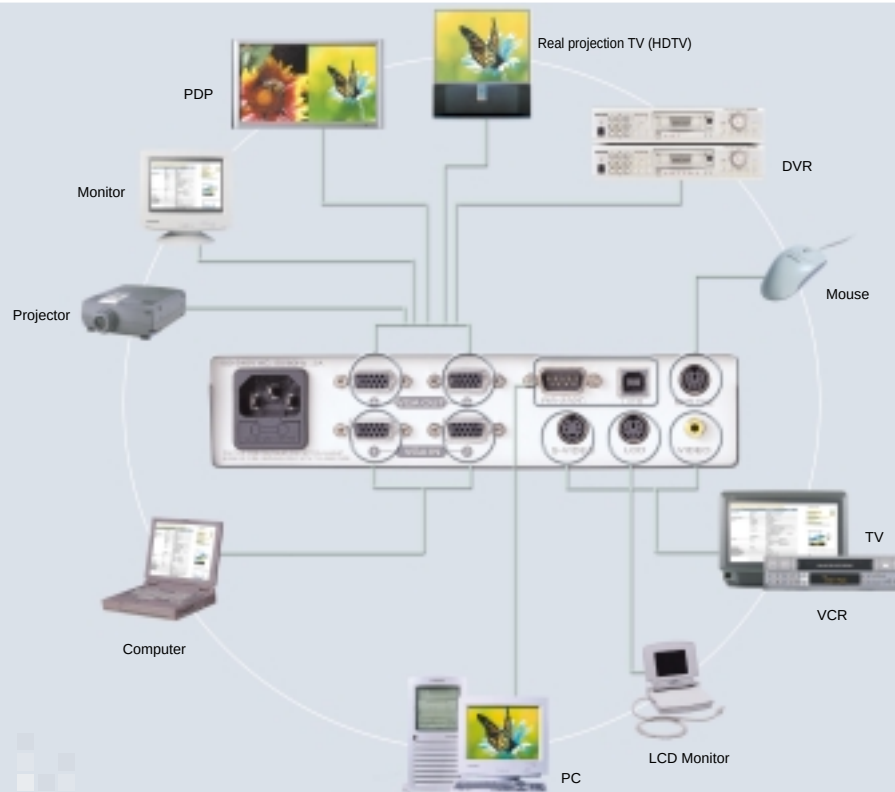



Samsung Digital Presenter SDP-950 ST/DX

SPECIFICATION	DESCRIPTION	SDP-950ST	SDP-950DX
OPTICAL SYSTEM	LENS, ZOOM	F2.9, f=6.3-75.6mm [12X POWERED OPTICAL ZOOM]	
	SHOOTING AREA	MAX: 297mm X 210mm [11.59 X 8.27 Inch], MIN: 32mm X 24mm [1.26 X 0.94 Inch]	
	FOCUS	AUTO FOCUS / MANUAL FOCUS	
	IRIS	AUTO / MANUAL	
VIDEO	ADAPTOR LENS	REMOVABLE	
	PICK-UP DEVICE	1/3" 850,000 PIXELS PS[PROGRESSIVE SCAN] CCD	
	TOTAL PIXELS	1,077[H] X 788[V]	
	EFFECTIVE PIXELS	1,024[H] X 768[V]	
	FRAME RATE	15 FRAMES/SEC	
	SYNC SYSTEM	INTERNAL SYNC.	
	RESOLUTION	VGA OUT - HORIZONTAL: 570TVL / VIDEO OUT - HORIZONTAL : 350TVL	
	S/N RATIO	48dB	
	VIDEO OUTPUT	C-VIDEO / S-VIDEO	
	VGA OUTPUT	1,024 X 768 [XGA] RGB COLOR / 800 X 600 [SVGA] RGB COLOR / 640 X 480 [VGA] RGB COLOR	
PC INTERFACE	WHITE BALANCE	AUTO / MANUAL	
	USB	BUILT-IN	
	RS-232C	BUILT-IN	
	APPLICATION SOFTWARE	WIN / MAC	
	WINDOWS SOFTWARE	TWAIN DRIVER	
DIGITAL FUNCTIONS	GRAPHIC USER INTERFACE	PULL DOWN MENU, WRITING & DRAWING ON THE SCREEN BY PC MOUSE [PS/2]	
	IMAGE FREEZE	AVAILABLE	
	NEGATIVE/POSITIVE	SELECTABLE	
	IMAGE SAVE & RECALL	NOT AVAILABLE	8 FRAMES SAVE, 3X3 FRAMES MULTI-DISPLAY
	IMAGE SPLIT AND SHIFT	NOT AVAILABLE	2 IMAGES [SAVE / LIVE]
	IMAGE ROTATION	NOT AVAILABLE	SWITCHABLE BY 90°, 180°, 270°, 360°
	PRESET SAVE	8 FUNCTIONS PRESET UPTO 4 CONDITIONS [ZOOM, FOCUS, IRIS, POSI/NEGA & etc.]	
LIGHTING SYSTEMS	UPPER LAMP	SIDE ARM LAMPS	
	LOWER LAMP	BOTTOM LIGHT BOX	
TERMINALS	INPUT	VGA X 2	
		MOUSE X 1	
	OUTPUT	VGA[15P DIN] X 2	
		S-VIDEO X 1 / C-VIDEO X 1 [RCA]	
		USB X 1	
		RS-232C[9 PIN] X 1	
REMOTE CONTROLLER		SUPPLIED	
OPERATION TEMPERATURE		+5℃ ~ +35℃	
OPERATION HUMIDITY		30% ~ 90%	
POWER SOURCE		AC 100V ~ 240V FREE VOLTAGE, 50/60Hz	
POWER CONSUMPTION		50W	
WEIGHT		5.5Kgs [12.13lb]	
DIMENSION		541mm[W] X 570mm[H] X 407mm[D] [IN USE] / 21.3[W] X 22.4[H] X 16[D] Inch [IN USE]	
OPTIONAL ACCESSORIES		LCD MONITOR, CARRYING BAG	

www.samsungpresenter.com

Design and specifications are subject to change without notice.



TECHWIN

Touchboards

205 Westwood Ave, Long Branch, NJ 07740

Phone: 866-94 BOARDS (26273) / (732)-222-1511

Fax: (732)-222-7088 | E-mail: sales@touchboards.com

■ DISTRIBUTED BY

