




TECHNICAL DATA SHEET

PRODUCT INFORMATION

DuPont™ Tyvek® IsoClean® Shoe Cover. Serged Seams. PVC Sole. Elastic Opening. Elastic Toe. 5" High. White.

ATTRIBUTES

Full Part Number	IC461SWHxx0300yy (xx=size) ?
Fabric/Materials	TYVEK® ISOCLEAN®
Design	Shoe Covers
Seam	Serged
Color	White
Quantity/Box	300 per case
Sizes	SM, MD, LG, XL
Option Codes	OB

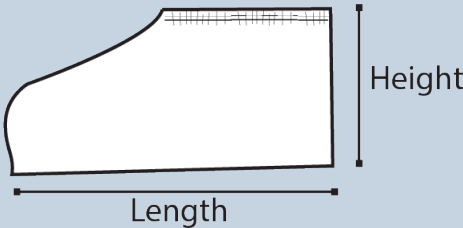

SIZE TABLE

SIZE	BOOT LENGTH	BOOT HEIGHT
SM	9 1/2	5 1/4
MD	11	5 1/4
LG	14	5 1/4
XL	15 1/2	5 1/4

PHYSICAL PROPERTIES


PROPERTY	TEST METHOD	TYPICAL RESULT	STDDEV
Basis Weight	ASTM D3776	1.22 oz/yd ²	0.04 oz/yd ²
Burst Strength - Mullen	ASTM D774	54 psi	11 psi
Breaking Strength - Grab (MD)	ASTM D5034	18 lb _f	2 lb _f
Breaking Strength - Grab (CD)	ASTM D5034	23 lb _f	3 lb _f
Bacterial Filtration Efficiency (3.0 micron)	ASTM F2101	99.0%	0.5%
Hydrostatic Head	AATCC 127	91 cm H ₂ O	14 cm H ₂ O
Wearing Apparel Flammability	16 CFR 1610	Class 1	

WARNING

As of January 2023, all DuPont Personal Protection products are manufactured under specifications that exclude components containing natural rubber latex. Tyvek® 500, Tyvek® 600 and Tyvek® 800 styles made before January 2023 contain natural rubber latex, which may cause allergic reactions in some sensitized individuals. Anyone who begins to exhibit an allergic response during the use of DuPont products should immediately cease using these products and should report it to DuPont at +1 (888) 439-2988 so that an investigation can be initiated.

DuPont™ SafeSPEC™ - We're here to help

Our powerful web-based tool can assist you with finding the appropriate DuPont garments for chemical and controlled environment hazards.



DUPONT

DuPont - SafeSPEC

DuPont Personal Protection

SafeSPEC™

in

DuPont Personal Protection

▶

DuPont Personal Protection

CREATED ON: JANUARY 23, 2026