

DuPont™ Tyvek® 400 D



Innovative Tyvek® garment design that allows heat to escape

Tyvek® 400 D fabric front provides an inherent barrier to fine particles and light liquid splash while not sticking to tacky resins.

ProShield® 10 fabric back helps increase breathability and reduce heat stress.



Respirator-fit hood with elastic around face opening

Longer zipper extends to chin for complete coverage of neck area

Storm flap

Elastic wrists and ankles



Comfort fit design helps enable a greater range of movement while stretching and bending; provides a more tailored fit; and utilizes a longer zipper to make coveralls easier to get on and take off

Thumb hole keeps garment sleeve in place while donning gloves and while reaching

Elastic to properly position garment at the waist



Fiberglass & composites manufacturing



Wind turbines



Boat construction & repair



Remediation



Maintenance

Reference: TD125S (collared) / TD127S (with hood)

Color: White front, blue back


Size: MD-4X (coveralls)





Tyvek® 400 D garments

- Designed with the known protection of Tyvek® fabric in the front (for limited protective requirements for frontal exposures) and breathable spunbond-meltblown-spunbond (SMS) fabric in the back to allow air to flow and heat to escape
- Durable, inherent barrier to fine particles on the front
- Protection from nonhazardous dry particles and light liquid splash applications on the back
- Can stand up to challenges ranging from tacky resin molds that can stick to (or delaminate) other garments to sanding and grinding operations that release fine airborne particulates

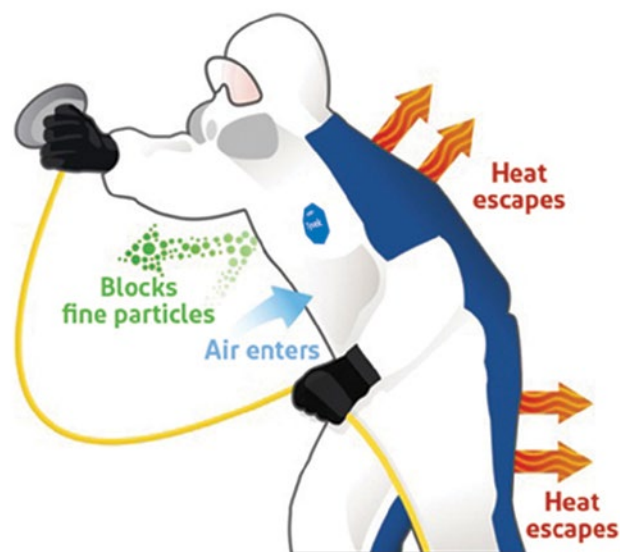

SafeSPEC™—we're here to help

Our powerful web-based tool can assist you with finding the appropriate DuPont garments for chemical, controlled environment, thermal and mechanical hazards.

safespec.dupont.com



Certified Industrial Hygienist team

A DuPont Certified Industrial Hygienist can conduct a job hazard assessment to help you determine the best DuPont garment for a specific hazard.



DuPont Personal Protection
Customer service 1 800 931 3456
personalprotection.dupont.com

Connect with us:  

This information is based upon technical data that DuPont believes to be reliable. It is subject to revision as additional knowledge and experience become available. It is the user's responsibility to determine the level of toxicity and the proper personal protective equipment needed. The information set forth herein reflects laboratory performance of fabrics, not complete garments, under controlled conditions. This information is intended for use by persons having the technical expertise to undertake evaluation under their own specific end-use conditions, at their own discretion and risk. Anyone intending to use this information should first check that the garment selected is suitable for the intended use. The end-user should discontinue use of garment if fabric becomes torn, worn or punctured, to avoid potential chemical exposure. Since conditions of use are beyond our control, DUPONT MAKES NO WARRANTIES, EXPRESSED OR IMPLIED, INCLUDING BUT NOT LIMITED TO WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE AND ASSUME NO LIABILITY IN CONNECTION WITH ANY USE OF THIS INFORMATION. This information is not intended as a license to operate under or a recommendation to infringe any trademark, patent or technical information of DuPont or other persons covering any material or its use.

© 2024 DuPont. All rights reserved. DuPont™, the DuPont Oval Logo, and all trademarks and service marks denoted with ™, SM or ® are owned by affiliates of DuPont de Nemours, Inc. unless otherwise noted. DSF24_2401-0394 (6/24)