




STRAIGHT STAINLESS STEEL PITOT TUBES

Pitot Tubes

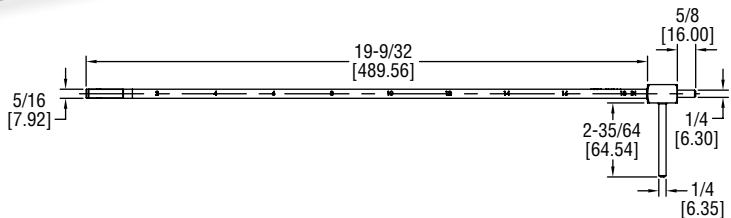

Sensing Profile

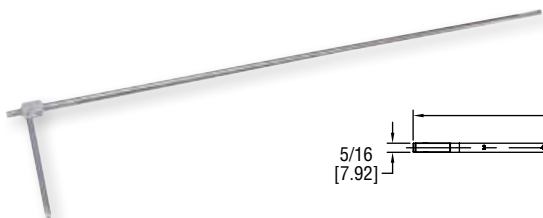

Scan here to watch product video

SERIES 160F PITOT TUBES are ideal for use with our precision air velocity gages, transmitters and digital test instruments. The Series 160F Pitot Tubes are constructed from corrosion resistant stainless steel for a lifetime of service. Permanent, stamped insertion depth graduations on sides of the 160F Pitot facilitate accurate positioning. Static pressure port is parallel to sensing tube allowing quick, easy alignment of tube with the air flow. Straight design allows for easy insertion into ducts through grills and pressure taps as well as aids in positioning in hard to reach locations where a hook style Pitot tube may not allow access.

SPECIFICATIONS

Wetted Material: 304 SS.
Accuracy: ±2% FS, 0 to 9000 FPM (45 M/s).
K-Factor: 0.81.
Temperature Limit: 1500°F (815°C).
Insertion Length: 18" (44 cm).
Process Connections: 1/4" OD.
Weight: 4.3 oz (122 g).
Agency Approvals: Meets the technical requirements of EU Directive 2011/65/EU (RoHS II).

MODEL CHART					
Model	Probe Length	Price	Model	Description	Price
160F	18" (457.2 mm)	\$150.00	160F-KIT	Kit containing 160-18, 160-24, 160-36, 160-48, and carrying case	\$850.00
160F-24	24" (609.6 mm)	175.00			
160F-36	36" (914.4 mm)	225.00			
160F-48	48" (1219.2 mm)	250.00			
160F-60	60" (1524 mm)	300.00			

ACCESSORIES		
Model	Description	Price
A-156	Flange mounting plate 1/2" female NPT	\$16.25
A-158	Split flange	13.75
A-159	Mounting gland	28.00
A-160-CASE	Carrying case for pitot tubes up to 48"	85.00
A-397	Step drill	33.75 (N)

(N) Items are net priced and are not subject to any discount.