



Hollow Heater Soldering Tools and Stations

| Part No. | Description |
|-----------|---|
| 930 | Soldering Station with CL1080 Soldering Tool and IP329 Base |
| 935 | Soldering Station with CL1080 Soldering Tool and PS536 Power Supply |
| 951DX-230 | Deluxe Soldering Station (includes all 230V models) |
| 951SX | Soldering Station (includes all 230V models) |
| 952DX-230 | Dual Deluxe Soldering Station (includes all 230V models) |
| 952SX | Dual Soldering Station (includes all 230V models) |
| CL1080 | Temperature Controlled Soldering Tool |
| CL1180 | Temperature Controlled Soldering Tool |
| CL1280I | Temperature Controlled Soldering Tool (230V) |
| CL1580I | Temperature Controlled Soldering Tool (230V) |

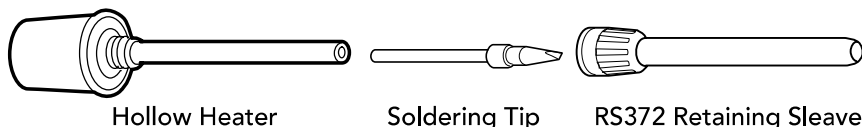


Hollow Threaded Heater Soldering Tools and Stations

| Part No. | Description |
|----------|-------------------------------------|
| CL1481 | Constant Temperature Soldering Tool |

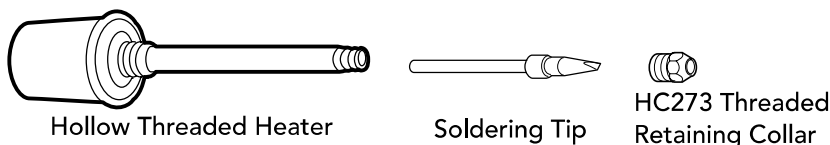


Hollow Heater Soldering Tools and Stations

| Part No. | Description |
|----------|----------------------------------|
| PSS2000 | Hybrid Portable Soldering System |

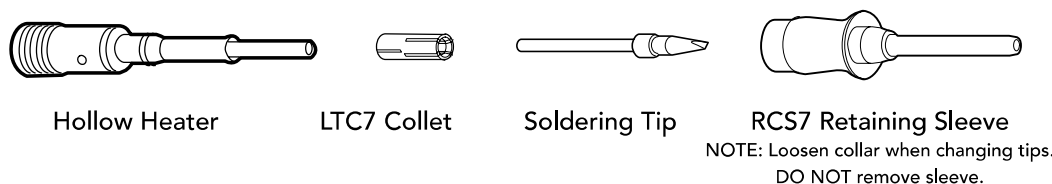


Front Loading Hollow Heater Soldering Tools and Stations

| Part No. | Description |
|-----------|--|
| 971 | Deluxe High Performance Soldering Station (includes all 230V models) |
| 971DX-230 | Deluxe High Performance Soldering Station (includes all 230V models) |
| 2020 | Microprocessor Controlled Digital Soldering Station (includes all 230V models) |

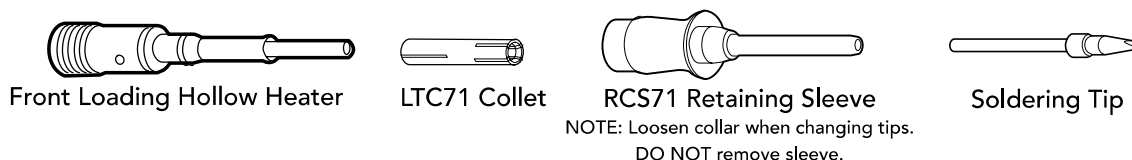




General Purpose Spade Tips




| Part No. | Tip Image | Width A | Length B |
|----------|-----------|---------------|---------------|
| LT375 | | .06" (1.5mm) | .48" (12.2mm) |
| LT376 | | .12" (3.0mm) | .48" (12.2mm) |
| LT394 | | .07" (1.8mm) | .93" (23.6mm) |
| LT395 | | .069" (2.3mm) | .74" (18.8mm) |
| LT431 | | .07" (1.8mm) | .74" (18.8mm) |
| LT444 | | .04" (1.0mm) | .78" (19.8mm) |

General Purpose Conical Tips



| | | | |
|-------|--|--------------|---------------|
| LT374 | | .03" (0.8mm) | .48" (12.2mm) |
| LT382 | | .02" (1.5mm) | .62" (15.8mm) |
| LT429 | | .02" (0.5mm) | .74" (18.8mm) |


General Purpose Angled Conical Tip












| | | | |
|---------|--|--------------|---------------|
| LT429-1 | | .02" (0.5mm) | .74" (18.8mm) |
|---------|--|--------------|---------------|













High Temperature Rated Spade Tips



| Part No. | Tip Image | Width A | Length B |
|----------|---|--------------|---------------|
| LT371LF |  | .03" (0.8mm) | .55" (14.0mm) |
| LT375LF |  | .06" (1.5mm) | .48" (12.2mm) |
| LT376LF |  | .12" (3.0mm) | .48" (12.2mm) |
| LT394LF |  | .07" (1.8mm) | .93" (23.6mm) |
| LT395LF |  | .09" (2.3mm) | .74" (18.8mm) |
| LT424LF |  | .06" (1.5mm) | .74" (18.8mm) |
| LT425LF |  | .05" (1.3mm) | .93" (23.6mm) |
| LT431LF |  | .07" (1.8mm) | .74" (18.8mm) |
| LT444LF |  | .04" (1.0mm) | .78" (9.8mm) |


High Temperature Rated Conical Tips



| | | | |
|---------|---|--------------|----------------|
| LT374LF |  | .03" (0.8mm) | .48" (12.2mm) |
| LT380LF |  | .02" (0.5mm) | .32" (8.1mm) |
| LT382LF |  | .02" (0.5mm) | .62" (15.8mm) |
| LT383LF |  | .02" (0.5mm) | .72" (18.3mm) |
| LT392LF |  | .01" (0.3mm) | 1.13" (28.8mm) |
| LT429LF |  | .02" (0.5mm) | .74" (18.9mm) |
| LT439LF |  | .03" (0.8mm) | .50" (12.7mm) |
| LT446LF |  | .03" (0.8mm) | .48" (12.2mm) |
| LT603LF |  | .02" (0.5mm) | .69" (17.5mm) |




High Temperature Rated Angle Face Tips



| Part No. | Tip Image | Width A | Length B |
|----------|-----------|--------------|---------------|
| LT298LF | | .12" (3.1mm) | .59" (15.0mm) |
| LT299LF | | .16" (4.0mm) | .59" (15.0mm) |
| LT373LF | | .09" (2.3mm) | .59" (15.0mm) |
| LT387LF | | .06" (1.5mm) | .48" (12.2mm) |
| LT393LF | | .06" (1.5mm) | .94" (23.9mm) |
| LT398LF | | .12" (3.0mm) | .59" (15.0mm) |
| LT399LF | | .16" (4.0mm) | .59" (15.0mm) |
| LT430LF | | .06" (1.5mm) | .74" (18.8mm) |
| LT433LF | | .04" (1.2mm) | .69" (17.5mm) |
| LT443LF | | .09" (5.6mm) | .69" (17.5mm) |

High Temperature Rated Angled Spade Tips




| | | | |
|-----------|--|---------------|--------------|
| LT444-1LF | | .064" (1.0mm) | .78" (9.8mm) |
|-----------|--|---------------|--------------|

High Temperature Rated Angled Conical Tips

| | | | |
|-----------|--|--------------|----------------|
| LT392-1LF | | .01" (0.3mm) | 1.13" (28.8mm) |
| LT439-1LF | | .03" (0.8mm) | .50" (12.7mm) |
| LT602-1LF | | .02" (0.5mm) | .44" (11.2mm) |

High Temperature Rated Mini Flow Rework Tips




| | | | |
|---------|--|--------------|---------------|
| LT396LF | | .13" (3.3mm) | .69" (17.5mm) |
|---------|--|--------------|---------------|









Hollow Heater Soldering Tools and Stations
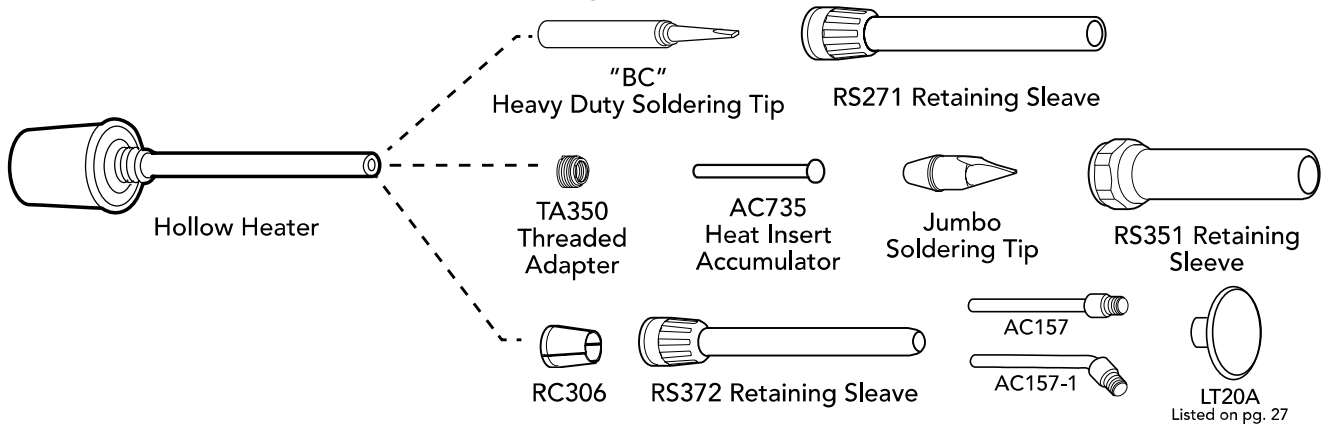
| Part No. | Description |
|-----------|---|
| 930 | Soldering Station with CL1080 Soldering Tool and IP329 Base |
| 935 | Soldering Station with CL1080 Soldering Tool and PS536 Power Supply |
| 951DX-230 | Deluxe Soldering Station (includes all 230V models) |
| 951SX | Soldering Station (includes all 230V models) |
| 952DX-230 | Dual Deluxe Soldering Station (includes all 230V models) |
| 952SX | Dual Soldering Station (includes all 230V models) |
| CL1080 | Temperature Controlled Soldering Tool |
| CL1180 | Temperature Controlled Soldering Tool |
| CL1280I | Temperature Controlled Soldering Tool |
| CL1580I | Temperature Controlled Soldering Tool |






Heavy Duty Spade Tips



| Part No. | Tip Image | Width A | Length B |
|----------|---|--------------|---------------|
| HS106BC |  | .18" (4.6mm) | .45" (11.4mm) |
| LT336BC |  | .07" (1.8mm) | .74" (18.8mm) |
| LT337BC |  | .10" (2.5mm) | .74" (18.8mm) |
| LT338BC |  | .13" (3.3mm) | .74" (18.8mm) |
| LT441BC |  | .21" (5.3mm) | .94" (23.9mm) |


Heavy Duty Angle Face Tips




| | | | |
|---------|---|--------------|---------------|
| LT339BC |  | .09" (2.3mm) | .77" (19.6mm) |
| LT340BC |  | .12" (3.0mm) | .77" (19.6mm) |
| LT341BC |  | .16" (4.0mm) | .77" (19.6mm) |

Heavy Duty SMD Knife Tip

| | | | |
|---------|---|--------------|---------------|
| LT570BC |  | .17" (4.3mm) | .68" (17.3mm) |
|---------|---|--------------|---------------|

Heavy Duty Jumbo Spade & Angle Tips




| | | | |
|--------|---|--------------|----------------|
| LT151B |  | .06" (1.5mm) | 1.13" (28.7mm) |
| LT152B |  | .32" (8.1mm) | .89" (22.6mm) |
| LT155B |  | .33" (8.4mm) | .97" (24.6mm) |



Front Loading Hollow Heater Soldering Tools and Stations

| Part No. | Description |
|-----------|--|
| 971 | Constant Temperature Soldering Tool (includes all 230V models) |
| 971DX-230 | Deluxe High Performance Soldering Station (includes all 230V models) |
| 2020 | Microprocessor Controlled Digital Soldering Station (includes all 230V models) |

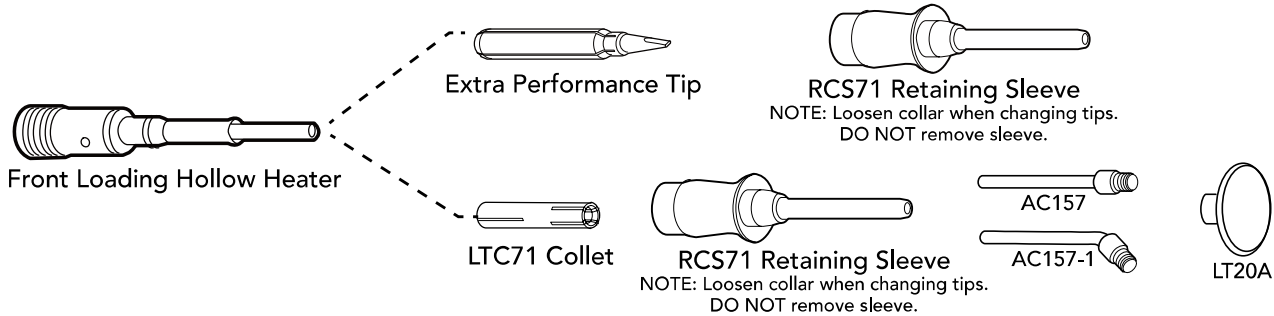

Heavy Duty Non-Plated Copper Leather Smoothing Tip

| Part No. | Tip Image | Diameter | Length |
|----------|-----------|-------------|--------|
| LT20A | | .79" (20mm) | N/A |

Extra Performance Spade Tips



| Part No. | Tip Image | Width A | Length B |
|----------|-----------|--------------|---------------|
| XP371 | | .03" (.80mm) | .61" (15.5mm) |
| XP375 | | .06" (1.5mm) | .61" (15.5mm) |
| XP376 | | .12" (3.0mm) | .61" (21.2mm) |
| XP395 | | .09" (2.3mm) | .84" (21.2mm) |
| XP441 | | .20" (5.0mm) | .59" (15.0mm) |
| XP444 | | .04" (1.0mm) | .87" (22.0mm) |

Extra Performance Conical Tips

| | | | |
|-------|--|-------------|---------------|
| XP374 | | .04" (.9mm) | .61" (15.5mm) |
| XP429 | | .02" (.6mm) | .83" (21.0mm) |

Extra Performance Angle Face Tip

| | | | |
|-------|--|-------------|--------------|
| XP399 | | .20 (5.0mm) | .45 (11.5mm) |
|-------|--|-------------|--------------|

