


5-1 General


Item	Specifications
Power source	12VDC (AC adapter AC100 - 240V)
Power consumption	21W
Outside dimensions	W349 x D377 x H432mm (When setup)
	W195 x D294 x H475mm (When folded)
Weight	Approx. 3kg (Main body only)
Input selection	Main/External (x2)
Output terminal	RGB output Mini Dsub 15P connector, female x 1
	HDMI output terminal x 1
	Line-out terminal \varnothing 3.5mm stereo minijack x 1
Input terminal	RGB input Mini Dsub 15P connector, female x 1
	HDMI input terminal x 1
	Mic-in / Line-in terminal \varnothing 3.5mm stereo minijack x 1
Ext. control terminal	USB device (3.0 compliant) Type B receptacle x 1
Memory Interface	SD card slot x 1
	USB host (2.0 compliant) Type A receptacle x 1

※ Use pin plug for RCA pin in accordance with EIAJ RC-6703.

• When setting to Line input

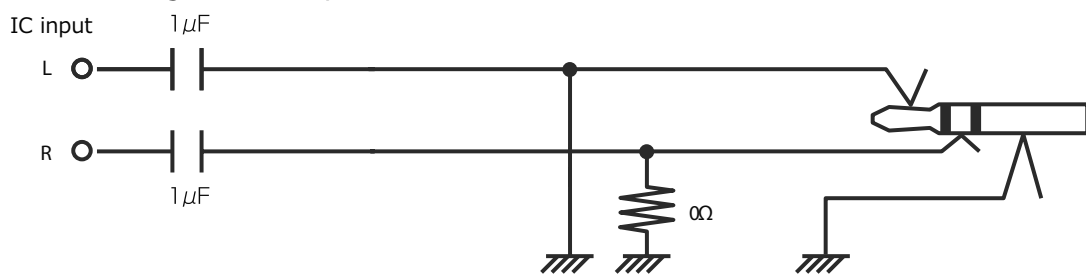

• When setting to External microphone input

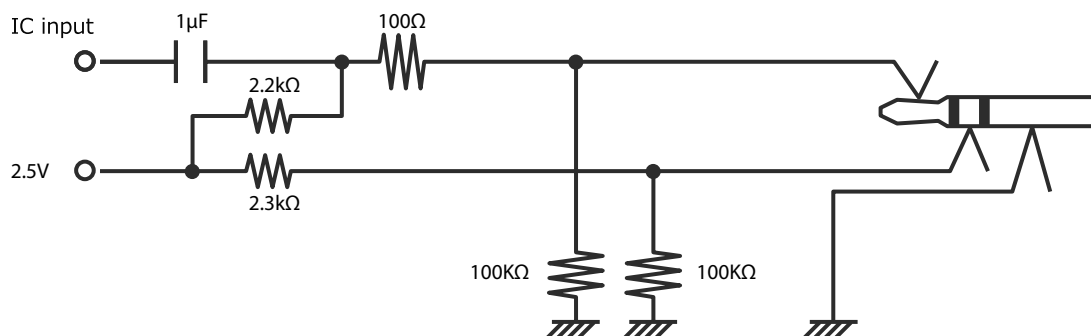

5-2 Main Camera

Item	Specifications
Lens	f=4.0mm ~ 48.0mm (12x zoom lens) F3.2 ~ F3.6
Frame rate	30fps
Limit of focus adjustment	From lens surface 50mm ~∞ (f=4.0mm - 23.4mm) 200mm ~∞ (f=23.4mm and higher)
Zoom	24x (Optical zoom 12x + Sensor zoom 2x)
Digital zoom	12x
Focus	Auto/Zoom Sync
Image pick-up element	1/2.3" CMOS
Effective pixels	Horizontal 3840, Vertical 2160 / 60fps Horizontal 3520, Vertical 2640 / 30fps
Resolution	HDMI : 3840 × 2160 / 1920 × 1080 / 1280 × 720 RGB : 1920 × 1080 / 1280 × 720 / 1024 × 768 USB : 3840x2160 / 1920 × 1080 / 1280 × 720 / 3200 × 2400 / 1600 × 1200 / 1024 × 768 / 640 × 480
White balance	Auto / One-push / Fluorescent / Indoor / Outdoor
Brightness adjustment	Manual
Color/B&W selection	Provided
Image rotation	90° / 180°
Image mode	Normal / Emphasis / Color emphasis / Black/white / DLP projector
Contour correct	Provided
Pause	Provided
Still image recording	Provided
Video recording	Provided
Flicker correction	60Hz / 50Hz

5-3 Illumination Device

Item	Specifications
Illumination	White LED