

## AA100

ARTICULATING KEYBOARD ARM

Model AA100

AA100 Rev A 4/17






# INSTALLATION AND USE

## AA100 ARTICULATING KEYBOARD ARM

**PLEASE REVIEW** these instructions before beginning the installation. Check that all parts needed were provided with your order. Contact your supplier if any parts are missing. Do not discard the packaging until satisfied that the product operates to your satisfaction.

### PARTS PROVIDED

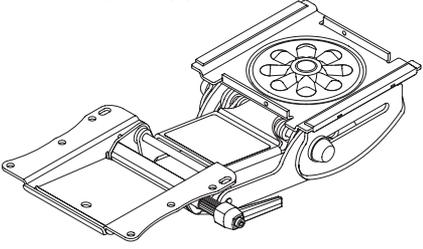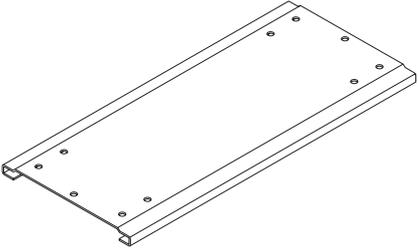Articulating Arm (1) 	Track (1) 		
Front Stop (1) 	Track Extender (1) 	Cord Clip (1) 	5/8" Wood Screws (20*)  *Includes Extras
Rear Bumper* (1)  *Optional	<b>CAUTION:</b> This install requires a power drill. This is <b>not</b> a hand tool install		

### ADDITIONAL TOOLS REQUIRED


- Drill with 1/8" bit
- #2 Phillips drill bit

### STEP 1: Drill Pilot Holes for Attaching Track

- Position one end of the track 1/2" from the front edge of the work surface.
- Drill 1/8" pilot holes through the seven holes indicated in the illustration.  
— Drill the holes 5/8" deep.


**CAUTION:** Be careful not to drill through the top of the work surface.

With this short 13" track, the track extender is normally used as the rear stop. If the rear bumper will be used instead, drill a pilot hole in the center rear hole and do not drill pilot holes in the two rear side holes.

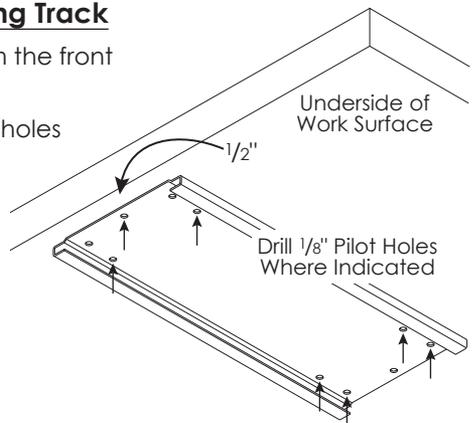


## STEP 2: Attach Track

- First attach the track through the four center holes, as shown.
- Then attach the track extender through the two rear holes.
- Do not attach a screw through the front center hole at this time.

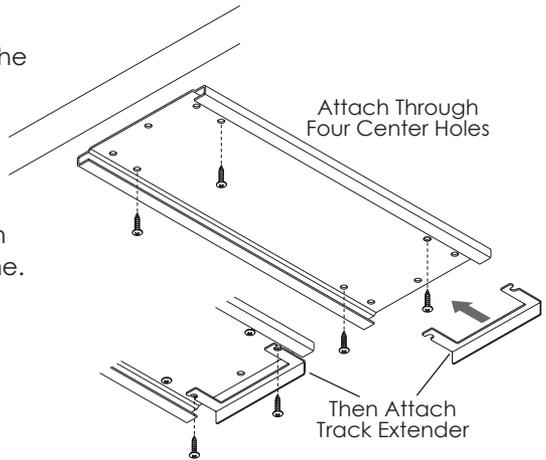


## STEP 3: Install Articulating Arm

- Slide the articulating arm onto the track. Position it back far enough so that you have access to the front center hole on the track.

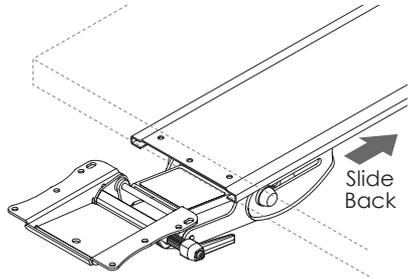

## STEP 4: Attach Front Stop

- Position the front stop onto the front of the track and secure it with a screw through the center hole.
- Drill pilot holes for the two side screws and attach the ends of the front stop with two more screws.

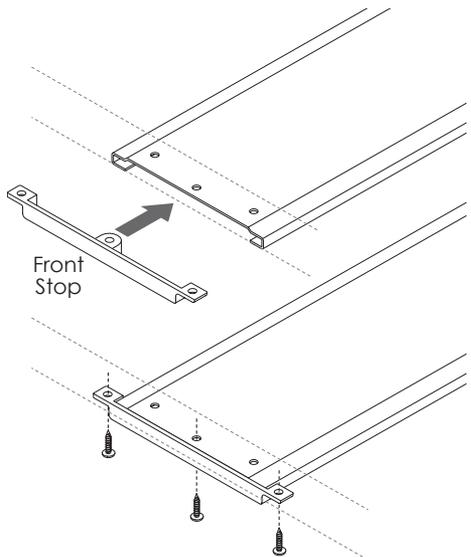

## OPERATION

### **To Tilt:**

- Loosen the ratchet handle, adjust the tilt angle, then tighten the handle.

### **To Telescope:**

- Lift the front of the platform and slide it inward to stow or outward to access.

### **To Raise:**

- Grasp both sides of the platform and raise to the desired height.

### **To Lower:**

- Grasp both sides of the platform, tilt up the front, and move down to the desired height.



800.833.3746 | [esiergo.com](http://esiergo.com)