


Specifications

|                                        |                                  |        |
|----------------------------------------|----------------------------------|--------|
| Units:                                 | Imperial                         | Metric |
| Maximum Operating Pressure (psi)       | 10,000                           |        |
| Cylinder Compatability                 | Double-acting                    |        |
| Reservoir Capacity (in <sup>3</sup> )  | 127                              |        |
| Usable Oil Capacity (in <sup>3</sup> ) | 127                              |        |
| Maximum Flow at Rated Pressure         | 10 in3/min                       |        |
| Valve Function                         | Advance / Hold / Retract         |        |
| Valve Operation                        | Manual                           |        |
| Valve Type                             | 4-way, 3-position, Tandem Center |        |
| Valve Model                            | VM4                              |        |
| Power Source                           | Air                              |        |
| Weight (lbs)                           | 24                               |        |

Dimensions

|                  |          |        |
|------------------|----------|--------|
| Units:           | Imperial | Metric |
| Dimension A (in) | 12.33    |        |
| Dimension B (in) | 6.49     |        |
| Dimension C (in) | 10.5     |        |
| Dimension D (in) | 9.04     |        |
| Dimension E (in) | 4        |        |
| Dimension F (in) | 1.42     |        |
| Dimension H (in) | 5.23     |        |
| Dimension J (in) | 6        |        |
| Dimension L (in) | 1.65     |        |
| Dimension M (in) | 12.6     |        |

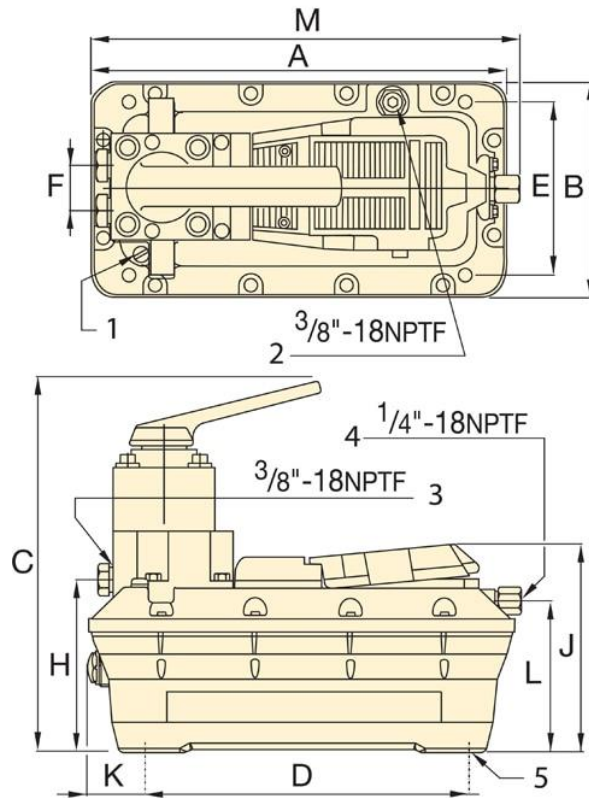

**PAMG-1402N and PAMG-1405N**

- ① Filtered "Permanent" Tank Vent
- ② Return-to-Tank/Auxiliary Vent/Fill Tank Port
- ③ Hydraulic Output
- ④ Swivel Air Input with Filter
- ⑤ 4 Mounting Holes for #10 thread forming screw. Max.depth into reservoir = .75"
- ⑥ Air Input Options