

Specifications


Units: Imperial Metric

Maximum Operating Pressure (psi)	10,000
Cylinder Compatability	Single-acting
Reservoir Capacity (in ³)	230
Maximum Flow at Rated Pressure	10 in ³ /min
Output Flow Rate (in ³ /min) No Load	60
Output Flow Rate Load (in ³ /min)	10
Valve Function	Advance / Hold / Retract
Valve Operation	Manual
Valve Type	3-way, 3-position
Power Source	Air
Pump Control	Hand/Foot
Air Consumption (scfm)	12
Weight (lbs)	22

Dimensions

Units: Imperial Metric

Dimension A (in)	15.6
Dimension B (in)	7.92
Dimension C (in)	8.22
Dimension D (in)	9.04
Dimension E (in)	4
Dimension H (in)	5.08
Dimension J (in)	5.75
Dimension L (in)	3.28
Dimension M (in)	17.2

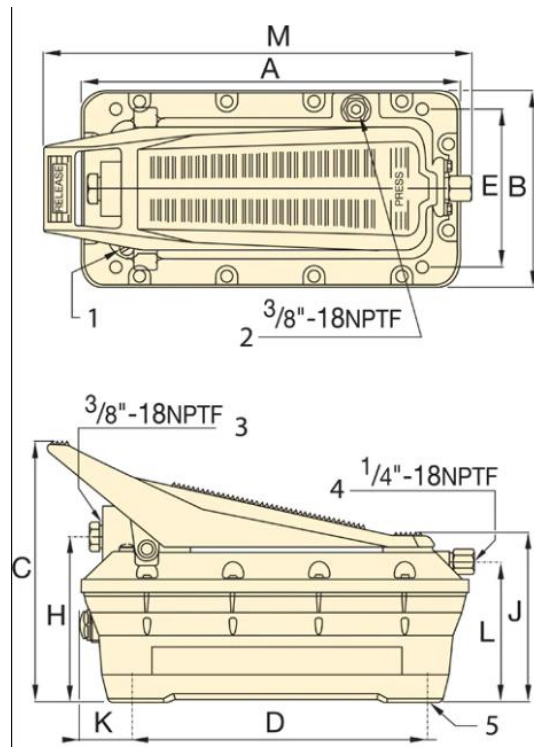

- ① Filtered "Permanent" Tank Vent
- ② Return-to-Tank/Auxiliary Vent/Fill Tank Port
- ③ Hydraulic Output
- ④ Swivel Air Input with Filter
- ⑤ 4 Mounting Holes for #10 thread forming screw. Max.depth into reservoir = .75"
- ⑥ Air Input Options

PATG-1102N and PATG-1105N