

Specifications


Units: **Imperial** Metric

| | |
|--|------------------------------|
| Maximum Operating Pressure (psi) | 10,000 |
| Capacity Class (tonnage) | 15 |
| Capacity (imperial tons) | 15 |
| Stroke (in) | 4.13 |
| Collapsed Height A (in) | 7.83 |
| Extended Height B (in) | 11.96 |
| Return Type | Single-Acting, Spring Return |
| Plunger Type | Solid |
| Material | Steel |
| Cylinder Effective Area (in ²) | 3.14 |
| Oil Capacity Required (in ³) | 12.57 |
| Ram Bore Diameter (in) | 2.00 |
| Pressure at Capacity (psi) | 9554 |
| Bolt Circle (in) | 1.88 |
| Thread (in) | .38 - 16 UNC |
| Thread Depth (in) | 0.50 |
| Weight (lbs) | 11.0 |

Dimensions

Units: **Imperial** Metric

| | |
|---|-----------|
| Collapsed Height A (in) | 7.83 |
| Extended Height B (in) | 11.96 |
| Body Outside Diameter C (in) | 2.75 |
| Piston Outside Diameter D (in) | 1.63 |
| Base to Port Center Line E (in) | 0.75 |
| Piston Internal Diameter Threads F (in) | 1 - 8 |
| Piston Thread Depth F (in) | 1.00 |
| Collar Threads G (in) | 2.75 - 16 |
| Collar Threads Length G (in) | 1.19 |

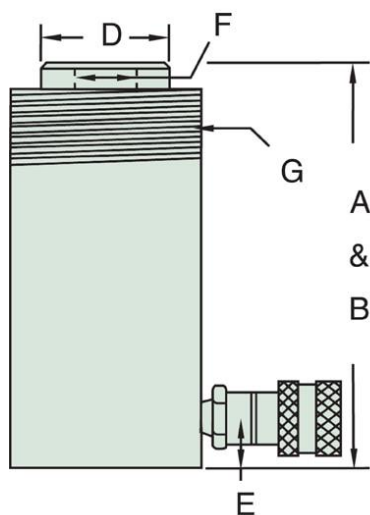

* R50 Base Mounting hole 7/32 through x 23/64 "C" bore (1/4" depth).

