
## **Specifications**

Units: Imperial Metric	
Maximum Operating Pressure (psi)	10,000
Capacity Class (tonnage)	75
Capacity (imperial tons)	75
Stroke (in)	6.06
Collapsed Height A (in)	11.31
Extended Height B (in)	17.37
Return Type	Single-Acting, Spring Return
Plunger Type	Solid
Material	Steel
Cylinder Effective Area (in <sup>2</sup> )	15.90
Oil Capacity Required (in <sup>3</sup> )	95.4
Ram Bore Diameter (in)	4.50
Pressure at Capacity (psi)	9430
Weight (lbs)	65.0

## **Dimensions**

Units: Imperi	al Metric	
Collapsed Height A (in)		11.31
Extended Height I	3 (in)	17.37
Body Outside Dia	neter C (in)	5.75
Piston Outside Di	ameter D (in)	3.75
Base to Port Cent	er Line E (in)	1.19
Collar Threads G	in)	5.75 - 12
Collar Threads Le	ngth G (in)	1.75

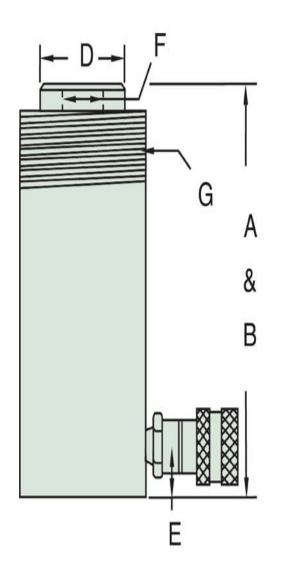

\* R50 Base Mounting hole 7/32 through x 23/64 "C" bore (1/4" depth).

