

Specifications



Units: **Imperial** Metric

Maximum Operating Pressure (psi)	10,000
Capacity Class (tonnage)	20
Capacity (imperial tons)	20
Stroke (in)	0.44
Collapsed Height A (in)	2.03
Extended Height B (in)	2.47
Return Type	Single-Acting, Spring Return
Plunger Type	Solid
Material	Steel
Cylinder Effective Area (in ²)	4.43
Oil Capacity Required (in ³)	1.9
Ram Bore Diameter (in)	2.38
Pressure at Capacity (psi)	9030
Weight (lbs)	6.0

Dimensions

Units: **Imperial** Metric

Collapsed Height A (in)	2.03
Extended Height B (in)	2.47
Body Length C (in)	4.00
Body Width D (in)	3.00
Piston Outside Diameter E (in)	1.13
Base to Port Center Line F (in)	0.75
Width G (in)	1.56
Width H (in)	1.93
Base Mounting Hole Dimensions (in)	.39 through x .62 C' Bore (.39 Deep)

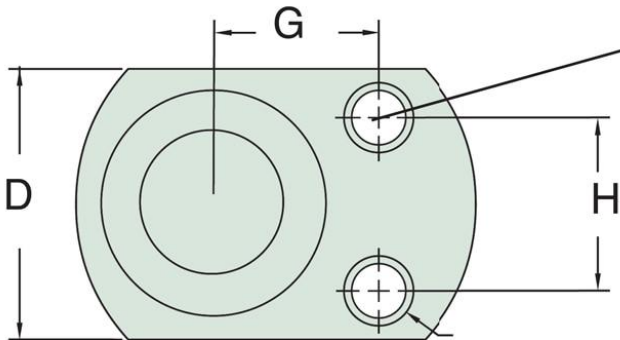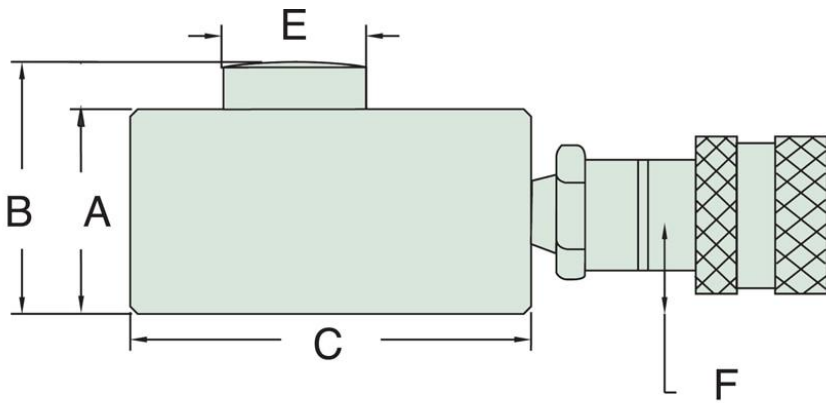

Refer to Base
Mounting Table