

Specifications

Units:

Imperial

Metric

Maximum Operating Pressure (psi)	10,000
Maximum Spread (in)	4.53
Power Source	Hydraulic
Capacity (imperial tons)	14.6
Tip Clearance (in)	0
Usable on Flanges Specified to Accept the Following Bolt Sizes	M39 (1 1/2"), M42 (1 5/8"), M45 (1 3/4")
Weight (lbs)	89.3

Dimensions




Units:

Imperial

Metric

Dimension A (in)	20.3
Dimension A1, Minimum Axial Tool Space (for installation) (in)	12.2
Dimension A2, Minimum Axial Tool Space (installed) (in)	10.2
Dimension C, Maximum Flange Clearance (in)	2.8
Dimension D (in)	4.5
Dimension E (in)	24.8
Dimension F (in)	2.8
Dimension F, Minimum Flange Joint Thickness (in)	4.7
Dimension F, Maximum Flange Joint Thickness (in)	12.2
Dimension R, Minimum Radial Space (in)	11.0
Dimension V, Minimum Valve/Spacer Thickness (in)	0
Dimension V, Maximum Valve/Spacer Thickness (in)	3.7
Case Dimensions (in)	35.0 x 22.4 x 6.5

SG13TE
SG15TE

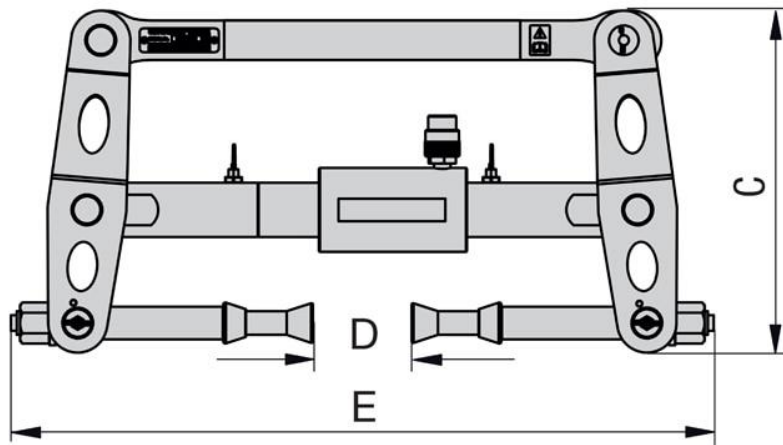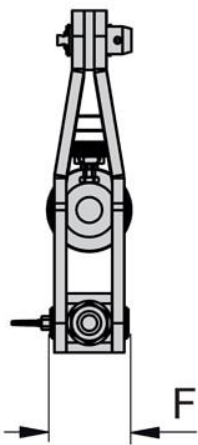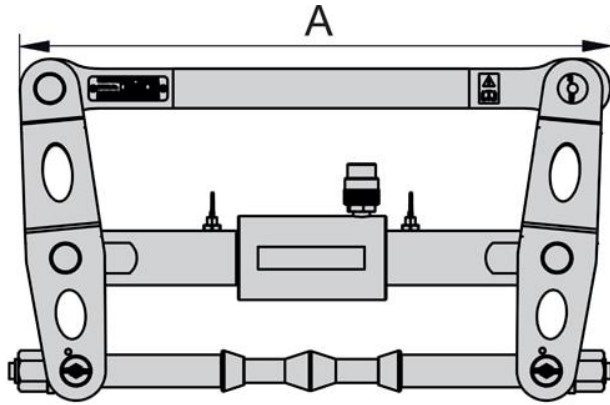

SPACIAL ENVELOPE

