

Specifications

Units: Imperial Metric


Maximum Operating Pressure (psi)	10,000
Maximum Spread (in)	3.94
Power Source	Hydraulic
Capacity (imperial tons)	16.9
Tip Clearance (in)	0
Usable on Flanges Specified to Accept the Following Bolt Sizes	M48 (1 7/8"), M52 (2"), M56 (2 1/4")
Weight (lbs)	99.2

Dimensions

Units: Imperial Metric

Dimension A (in)	23.6
Dimension A1, Minimum Axial Tool Space (for installation) (in)	15.0
Dimension A2, Minimum Axial Tool Space (installed) (in)	12.4
Dimension C, Maximum Flange Clearance (in)	3.1
Dimension D (in)	3.9
Dimension E (in)	28.3
Dimension F (in)	3.1
Dimension F, Minimum Flange Joint Thickness (in)	5.5
Dimension F, Maximum Flange Joint Thickness (in)	15.7
Dimension R, Minimum Radial Space (in)	14.6
Dimension V, Minimum Valve/Spacer Thickness (in)	0
Dimension V, Maximum Valve/Spacer Thickness (in)	3.1
Case Dimensions (in)	35.0 x 22.4 x 6.5

SG13TE
SG15TE

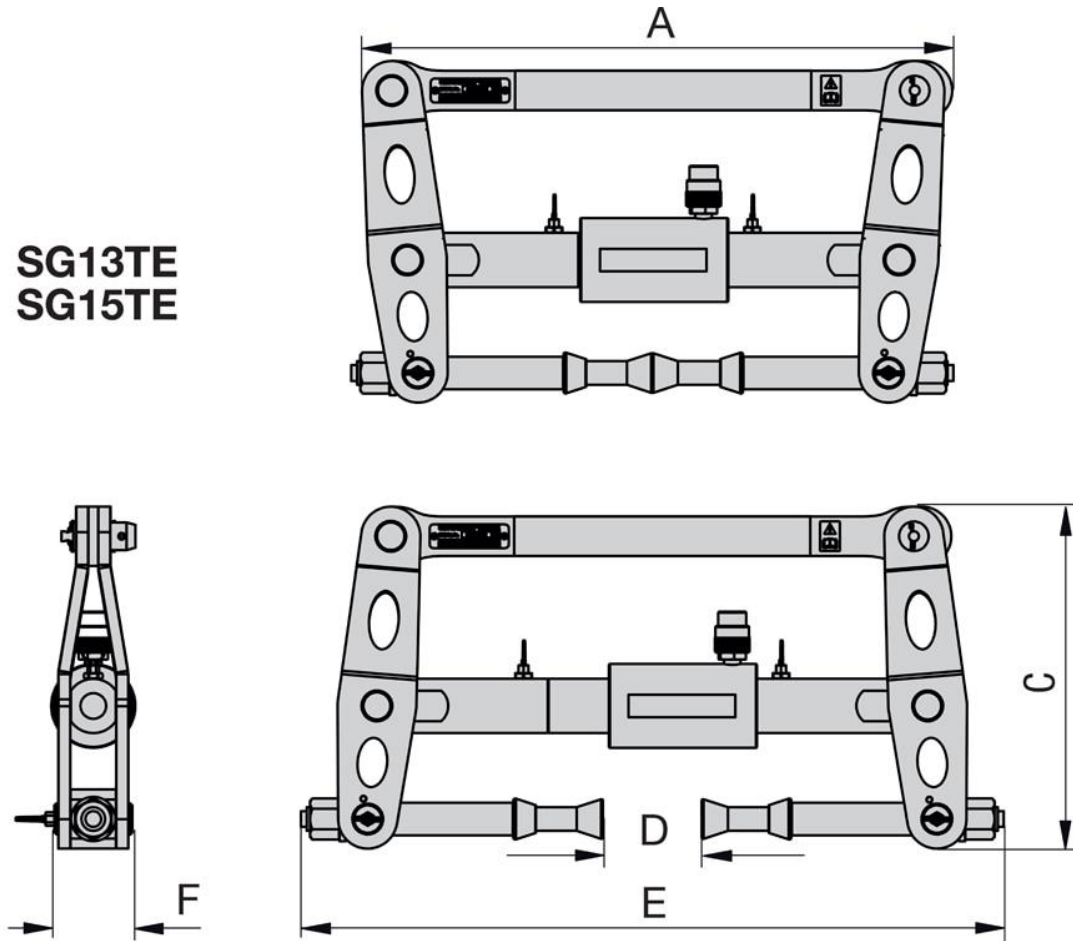

SPACIAL ENVELOPE

