


Capacity Range 10 - 100 to	ns
Stroke Range ▶ 1.5 - 14.25	in.
Maximum Pressure▶ 10.000 psi	

- ► Each set comes with a 6' hose equipped with a high flow coupler, gauge and gauge adapter.
- Cylinders can be used in upright, inverted or horizontal position.
- Maximum control and safety is provided with the pressure gauge.
- ► Optimal performance provided with matched pump and cylinder.



THINK SAFETYPlease refer to pages 4&5 for a complete list of safety tips and recommendations.

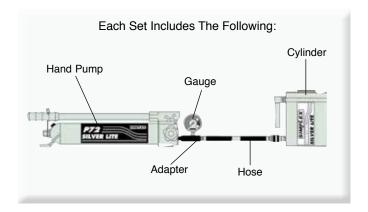

Eliminate the hassle of matching the right pump to the right cylinder by ordering our pre-matched pump & cylinder sets. ▼



Pump and cylinder sets are ideal for shop equipment servicing, such as this scrap metal receptacle requiring maintenance. ▼



Steel Hand Pumps

Center Hole Cylinder Sets

Model	Capacity	Stroke	Closed	Included in Set				
	(tons)	(in)	Height (in)	Cylinder Model	Pump Model	Hose	Gauge	Gauge Adapter
ST302HCA	30	2.5	7.03	RC302A	P42	HCA6	GTH12	GA1
ST306HCA	30	6.13	13	RC306A	P82A	HCA6	GTH12	GA1

Low Profile Cylinder Sets

Model	Capacity	Stroke	Closed Height (in)	Included in Set					
	(tons)	(in)		Cylinder Model	Pump Model	Hose	Gauge	Gauge A dapter	
ST101A	10	1.5	3.47	RLS101	P42	HCA6	GT5	GA1	
ST201A	20	1.75	3.87	RLS201	P42	HCA6	GT20	GA1	
ST302A	30	2.44	4.62	RLS302	P42	HCA6	GT30	GA1	
ST502A	50	2.38	4.81	RLS502	P42	HCA6	GT20	GA1	
ST1002A	100	2.25	5.56	RLS1002	P82A	HCA6	GT20	GA1	

General Purpose Cylinder Sets

Model	Capacity	Stroke		Included in Set					
	(tons)	(in)		Cylinder Model	Pump Model	Hose	Gauge	Gauge Adapter	
ST102A	10	2.19	4.78	R102	P42	HCA6	GT5	GA1	
ST106A	10	6	9.78	R106	P42	HCA6	GT5	GA1	
ST1010A	10	10	13.78	R1010	P42	HCA6	GT5	GA1	
ST252A	25	2	6.5	R252	P42	HCA6	GT25	GA1	
ST254A	25	4	8.5	R254	P42	HCA6	GT25	GA1	
ST256A	25	6.19	10.75	R256	P82A	HCA6	GT25	GA1	
ST2514A	25	14.19	18.75	R2514	P82A	HCA6	GT25	GA1	
ST556A	55	6.19	11.06	R556	P82A	HCA6	GT25	GA1	

Aluminum Hand Pumps

Silver Lite Aluminum Spring Return Sets

Model	Capacity	acity Stroke	Closed Height (in)	Included in Set					
	(tons) (in)	(in)		Cylinder Model	Pump Model	Hose	Gauge	Gauge Adapter	
STL302	30	2	6.5	RAS302B	P72	HCA6	G5	GA1	
STL306	30	6	10.5	RAS306B	P72	HCA6	G5	GA1	
STL502	50	2	6.5	RAS502B	P72	HCA6	G 5	GA1	
STL504	50	4	8.5	RAS504B	P72	HCA6	G5	GA1	
STL1002	100	2	6.5	RAS1002B	P72	HCA6	G5	GA1	

Silver Lite Aluminum Spring Return Center Hole Sets

Model	Capacity	Stroke	Closed	Included in Set					
	(tons)	(in)	Height (in)	Cylinder Model	Pump Model	Hose	Gauge	Gauge Adapter	
STL303HC	30	3	8.75	RAC303	P72	HCA6	G5	GA1	
STL306HC	30	6	11.75	RAC306	P72	HCA6	G5	GA1	
STL603HC	60	3	10.13	RAC603	P72	HCA6	G5	GA1	