

Specifications


Units:

Imperial

Metric

Maximum Operating Pressure (psi)	10,000
Valve Type	4-Way, 3-Position, Tandem Center, Locking
Function	Advance / Hold / Retract
Cylinder Compatibility	Double-Acting
Mounting Location	Remote Mounted
Valve Operation	Manual
Flow Capacity (gal/min)	4.5
Weight (lbs)	10.3

Dimensions

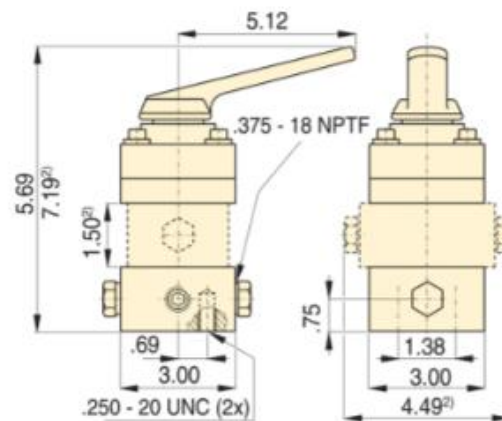

VC3, VC3L, VC-15, VC15L, VC-4, VC4L, VC20, VC20L

²⁾ VC3L, VC15L, VC4L and VC20L only

Specifications


Units:

Imperial

Metric

Maximum Operating Pressure (psi)	10,000
Valve Type	4-Way, 3-Position, Tandem Center, Locking
Function	Advance / Hold / Retract
Cylinder Compatibility	Double-Acting
Mounting Location	Remote Mounted
Valve Operation	Manual
Flow Capacity (gal/min)	4.5
Weight (lbs)	10.3

Dimensions

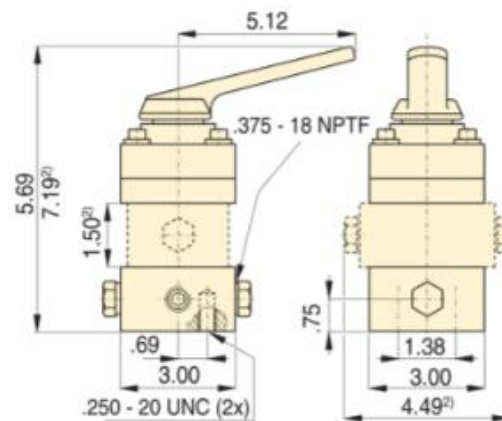

VC3, VC3L, VC-15, VC15L, VC-4, VC4L, VC20, VC20L

²⁾ VC3L, VC15L, VC4L and VC20L only