

Specifications


Units: **Imperial** Metric

Maximum Operating Pressure (psi)	10,000
Capacity Class (tonnage)	10
Maximum Cylinder Capacity Retract (tons)	11.6
Stroke (in)	5.91
Collapsed Height A (in)	23.66
Extended Height B (in)	29.57
Return Type	Single-Acting, Spring Return
Plunger Type	Solid
Material	Steel
Cylinder Effective Area Retract (in ²)	2.45
Oil Capacity Retract (in ³)	14.58
Surface Treatment	Paint
Coupler	CR400 Coupler
Weight (lbs)	34


Dimensions

Units: **Imperial** Metric


Collapsed Height A (in)	23.66
Extended Height B (in)	29.57
Outside Diameter D (in)	3.35
Cylinder Bore Diameter E (in)	2.13
Saddle Diameter J1 (in)	4.13
Plunger to Base L (in)	3.43
Plunger to Mounting Hole M (in)	1.18
Link Width N (in)	1.38
Slot to Link End T (in)	1.28

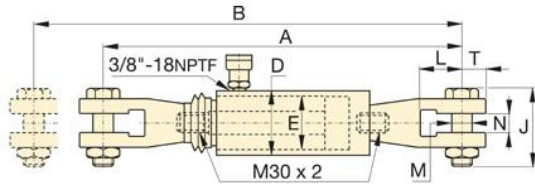


BRP-106C

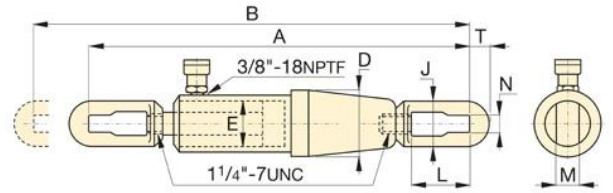

BRP-306

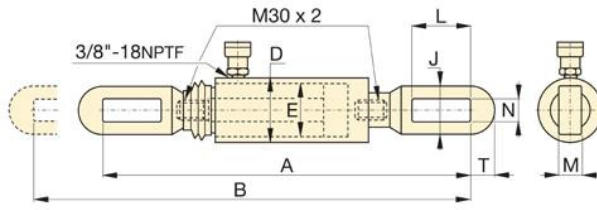

BRP-106L

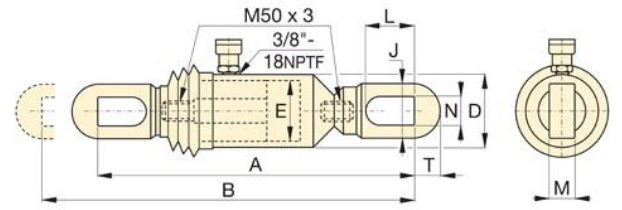

BRP-606