

Specifications

Units:

Imperial

Metric

Maximum Operating Pressure (psi)	10,000
Capacity Class (tonnage)	60
Maximum Cylinder Capacity Retract (tons)	55.8
Stroke (in)	6
Collapsed Height A (in)	28.28
Extended Height B (in)	34.28
Return Type	Single-Acting, Spring Return
Plunger Type	Solid
Material	Steel
Cylinder Effective Area Retract (in ²)	11.17
Oil Capacity Retract (in ³)	67.02
Surface Treatment	Paint
Coupler	CR400 Coupler
Weight (lbs)	129


Dimensions

Units:


Imperial

Metric


Collapsed Height A (in)	28.28
Extended Height B (in)	34.28
Outside Diameter D (in)	5.51
Cylinder Bore Diameter E (in)	4.33
Saddle Diameter J1 (in)	5.12
Plunger to Base L (in)	5.93
Plunger to Mounting Hole M (in)	1.58
Link Width N (in)	1.89
Slot to Link End T (in)	2.56

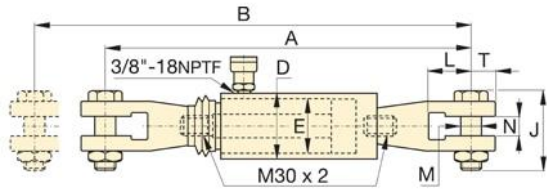


BRP-106C

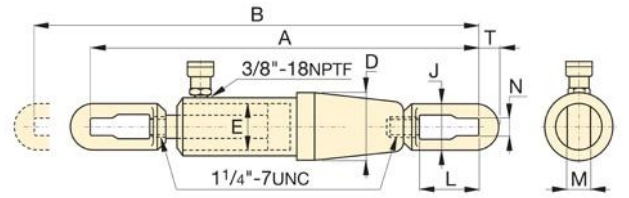

BRP-306

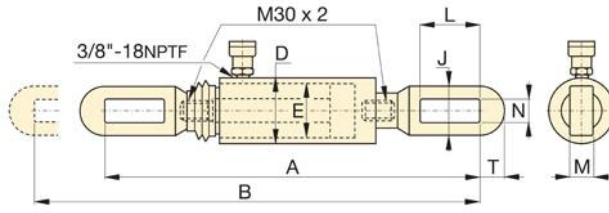

BRP-106L

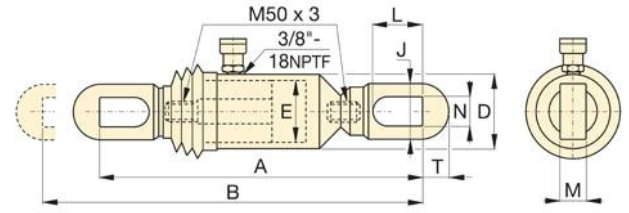

BRP-606