



Air Torque



G5772T Shown

**Reservoir Capacity** .....▶ 1.5 - 2.5 gallons  
**Weight** .....▶ 75 - 85 lbs.  
**Maximum Pressure** .....▶ 10,000 psi

- ▶ Powered by a rotary air vane, 3 hp motor (3,000 rpm).
- ▶ Equipped with a filter-lubricator assembly, air muffler, adjustable relief and 12' remote controlled pendant on all models.
- ▶ High performance two-stage pump provides higher cross-over pressure for faster cycle times and tool operation; 55 cubic inches / minute @ 10,000 PSI.

**TORQUE HOSES -**  
 Heavy duty, thermo-plastic torque wrench hoses to meet your requirements.




**TORQUE WRENCHES - pages 88 - 91**  
 Torque wrenches available in lightweight square drive, or low clearance wrenches.



**G5 Air Bolting Pump Factory Installed Options**

For ordering, add option letter to end of the model number.

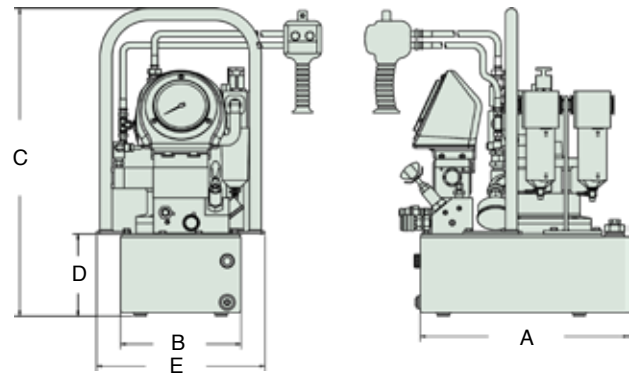

Reservoir (Gallons)	A	B	C	D	E
	(in)	(in)	(in)	(in)	(in)
1.5	15.13	8.75	22.34	5.96	12.24
2.5	17	9.75	22.34	5.96	13.24

Larger capacities available upon request.

A Simplex G5 Air pump is used with a WT-2 to remove the shroud on this steel cutter. ▼



Model	Pressure Rating (psi) Stages		Output Flow (cu.in./min.) Stages		Motor Spec.		Valve Type	Pendant Control	Usable Oil (Gallons)	Weight (lbs)
	1st	2nd	1st	2nd	(psi)	(cfm)				
G5772T	1,200	10,000	700	55	90	50	4W, 2P	Motor / Solenoid	1.5	75
G5773T	1,200	10,000	700	55	90	50	4W, 2P	Motor / Solenoid	2.5	85

Bolting Products