

Specifications


Units: **Imperial** Metric

Maximum Operating Pressure (psi)	10,000
Pressure Rating (psi) 1st Stage	500
Pressure Rating (psi) 2nd Stage	10,000
Cylinder Compatibility	Single-acting
Pump Type	Two Speed
Reservoir Capacity (in ³)	134
Usable Oil Capacity (in ³)	134
Maximum Flow at Rated Pressure	.15 in ³ /stroke
Oil Displacement per Stroke (in ³) 1st Stage	1
Oil Displacement per Stroke (in ³) 2nd Stage	0.15
Maximum Handle Effort (lbs)	77
Piston Stroke (in)	1
Valve Operation	Manual
Power Source	Manual
Weight (lbs)	23.6

Dimensions

Units: **Imperial** Metric

Dimension A (in)	16.83
Dimension B (in)	20.12
Dimension C (in)	1.18
Dimension D (in)	1.38
Dimension E (in)	2.17
Dimension H (in)	23.5
Dimension J (in)	18.11
Dimension L (in)	7.65
Dimension N (in)	5.91
Dimension P (in)	4.76
Dimension Q (in)	1.65
Dimension S (in)	0.33
Dimension T (in)	2.93

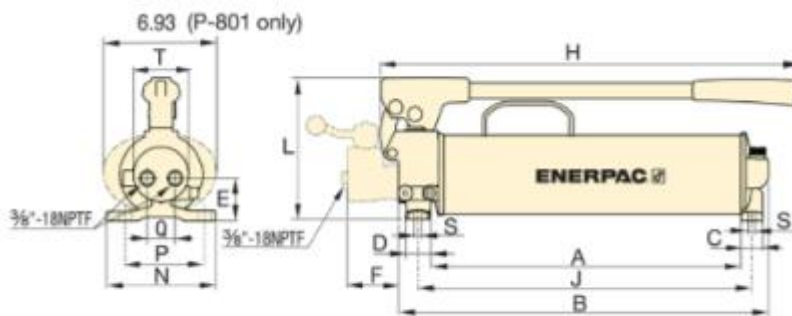

P-80, P-801, P-84